




Power Supplies & UPS

75-120W Single Output Switching Power Supply

Detailed product specifications are available on: us.100y.com.tw

Part No.	Product No.	Manufacturer	Description	Output Volt.	Output Current	Tol.(±)
29709	RS-75-48	MEAN WELL	MEAN WELL_75W Single Output Output Switching Power Supply	±1%	48V	0~1.6A
29705	RS-75-5	MEAN WELL	MEAN WELL_75W Single Output Output Switching Power Supply	±2%	5V	0~12A




Low cost, high reliability.
 Compact size, light weight
 105°C output capacitor.
 100% full load burn-in test.
 International ac input range.
 Built in emi filter, low ripple noise
 High efficiency, low working temperature.
 Soft-start circuit, limiting ac surge current.
 Short circuit, overload, over voltage protected

Input voltage range: 85~132VAC/180~264VAC Selected by switch 47~63Hz; 255~370VDC
 AC Current: 2. 4A/115V 1. 2A/230V
 Inrush current: cold start 30A/115V 60A/230V
 Leakage current: < 1mA/240VAC
 Temp. coefficient: ±0. 03%/°C (0~50°C)
 Withstand voltage: I/P-O/P: 1. 5KVAC I/P-FG: 1. 5KVAC
 O/P-FG: 0. 5KVAC
 Weight: 0. 65Kgs
 Safety standards: Meet UI1012 Requirement(not apply for the mark)



Part No.	Product No.	Manufacturer	Description	Output Volt.	Output Current	Tol.(±)
20931	S-100-10	MEAN WELL	100W Single Output Switching Power Supply	10VDC	10A	+/-1%
7531	S-100-12	MEAN WELL	100W Single Output Switching Power Supply	12VDC	8.5A	+/-1%
7532	S-100-15	MEAN WELL	100W Single Output Switching Power Supply	15VDC	6.7A	+/-1%
11717	S-100-18	MEAN WELL	100W Single Output Switching Power Supply	18VDC	5.6A	+/-1%
7588	S-100-24	MEAN WELL	100W Single Output Switching Power Supply	24VDC	4.5A	+/-1%
20932	S-100-27	MEAN WELL	100W Single Output Switching Power Supply	27VDC	3.7A	+/-1%
11722	S-100-3	MEAN WELL	100W Single Output Switching Power Supply	3VDC	20A	+/-2%
7533	S-100-48	MEAN WELL	100W Single Output Switching Power Supply	48VDC	2A	+/-1%
7530	S-100-5	MEAN WELL	100W Single Output Switching Power Supply	5VDC	20A	+/-2%
11723	S-100-7.5	MEAN WELL	100W Single Output Switching Power Supply	7.5VDC	13.6A	+/-1%



Low cost, high reliability.
 Compact size, light weight
 105°C output capacitor.
 100% full load burn-in test.
 International ac input range.
 Built in emi filter, low ripple noise
 High efficiency, low working temperature.
 Soft-start circuit, limiting ac surge current.
 Short circuit, overload, over voltage protected

Input voltage range: 88~132VAC/176~264VAC Selected by jumper or switch 47~63Hz; 248~370VDC
 AC Current: 2. 4A/115V 1. 2A/230V
 Inrush current: cold start 30A/115V 60A/230V
 Leakage current: < 1mA/240VAC
 Temp. coefficient: ±0. 03%/°C (0~50°C)
 Withstand voltage: I/P-O/P: 3KVAC I/P-FG: 1. 5KVAC
 O/P-FG: 0. 5KVAC
 Weight: 0. 65Kgs
 Safety standards: UL1012 TUV EN60950 (IEC950, UL1950) APPROVED




Part No.	Product No.	Manufacturer	Description	Output Volt.	Output Current	Tol.(±)
20939	S-100F-12	MEAN WELL	100W Single Output Switching Power Supply	12VDC	8.5A	+/-1%
20940	S-100F-15	MEAN WELL	100W Single Output Switching Power Supply	15VDC	6.7A	1%
12196	S-100F-24	MEAN WELL	100W Single Output Switching Power Supply	24VDC	4.5A	+/-1%
20941	S-100F-48	MEAN WELL	100W Single Output Switching Power Supply	48VDC	2.2A	+/-1%
20933	S-100F-5	MEAN WELL	100W Single Output Switching Power Supply	5VDC	20A	+/-%
20938	S-100F-7.5	MEAN WELL	100W Single Output Switching Power Supply	7.5VDC	13.5A	+/-1%

145W-150W Single Output Switching Power Supply

Detailed product specifications are available on: us.100y.com.tw



Low cost, high reliability.
 Compact size, light weight
 105°C output capacitor.
 100% full load burn-in test.
 International ac input range.
 Built in emi filter, low ripple noise
 High efficiency, low working temperature.
 Soft-start circuit, limiting ac surge current.
 Short circuit, overload, over voltage protected

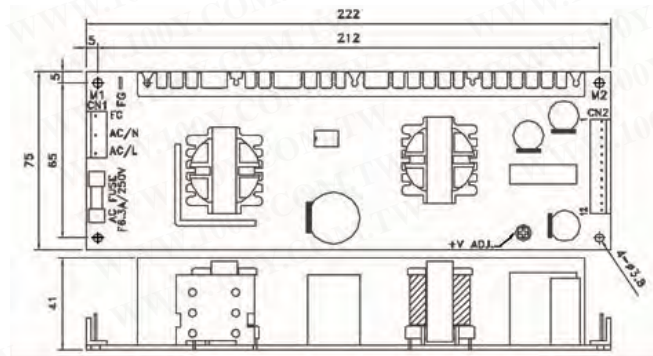

T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai: 100y-1@163.com