




CABLES / WIRES & ACCESSORIES

Nylon Cable Gland


Detailed product specifications are available on: us.100y.com.tw




- Materials : Nylon PA 66 (Flammability UL 94V-2)
- Colours : Standard in black and gray.
- Working Temp. : -40 oC to 100 oC.
- Installation : Time saving, cable can be easily once inserted into through the gland without dismantling the parts.
- Claw : The claws and seals of excellent design can hold cable firmly and have a wider cable range.
- Features : Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.



- Thread : Can be screwed directly onto Metric threaded mounting hole.
- Materials : Nylon PA 66 (Flammability UL 94V-2) for A.C.F parts, EPDM rubber for B.D parts.
- Colours : Standard in black and gray.
- Working Temp. : -40 oC to 100 oC.
- Installation : Time saving, cable can be easily once inserted into through the gland without dismantling the parts.
- Claw : The claws and seals of excellent design can hold cable firmly and have a wider cable range.
- Features : Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.
- Sealing Nut : Flexible protector in order to prevent harmful bends and prolong life of cable.



- Material: Nylon 66 (black) (Flammability UL 94V-2)
- Installation : Time saving, cable can be easily once inserted into through the gland without dismantling the parts.
- Claw : The claws and seals of excellent design can hold cable firmly and have a wider cable range.



- Materials : Nylon 66 (Black) (Flammability UL 94V-2)
- Installation : Time saving, cable can be easily once inserted into through the gland without dismantling the parts.
- Claw : The claws and seals of excellent design can hold cable firmly and have a wider cable range.
- Sealing Nut : Flexible protector in order to prevent harmful bends and prolong life of cable.



Part No.	Product No.	Manufacturer	Description	D1	(mm)	D2	B1	L1	L2	L3	Cable Range	Package
13444	AG-12	KSS	RCCN NYLON CABLE GLAND (WITH Metric)	12mm	1.25mm	8.3mm	5.0mm	7.9mm	12.1mm	13.3mm	3-6.5mm	50Pcs/Packing
21828	AG-16	KSS	RCCN NYLON CABLE GLAND (WITH Metric)	16mm	1.5mm	10.9mm	9.6mm	15.7mm	14.4mm	16.7mm	5~10mm	50Pcs/Packing
18354	AG-20SR	KSS	RCCN NYLON CABLE GLAND (WITH Metric)	20	1.5	14.8	12.9	12.8	19.5	96.2		50 Pcs / Packing
18355	AG-25SR	KSS	RCCN NYLON CABLE GLAND (WITH Metric)	25	1.5	18.5	16.5	13.9	19.5	111.2		25 Pcs / Packing
39037	EG-11	KSS	Nylon Cable Gland	17.3mm	1.5mm	13.2mm	9.6mm	8.2mm	15.4mm	18.3mm	5~10mm	50pcs
39465	EG-13.5	KSS	RCCN NYLON CABLE GLAND (WITH Metric)	19.3m	1.5m	15.2m	33.3mm	8.9m	15.8m	18.9m	22~32mm	50pcs
17643	EG-16	KSS	Nylon Cable Gland	22.2mm		17.2mm	14.5mm	9.8mm	17.3mm	19.7mm	10~14mm	
17642	EG-21	KSS	RCCN NYLON CABLE GLAND (WITH Metric)	28.1mm		22.4mm	16.5mm	10.8mm	18.6mm	23.9mm	13~18mm	
39038	EG-29	KSS	Nylon Cable Gland	35.6mm	1.5mm	30.6mm	23.3mm	10.9mm	20.5mm	27.4mm	18~25mm	25pcs
39041	EG-36	KSS	Nylon Cable Gland	44.9mm	1.5mm	35.2mm	33.3mm	14.4mm	24.4mm	30.5mm	22~32mm	10pcs
39464	EG-7	KSS	RCCN NYLON CABLE GLAND (WITH Metric)	11.7mm	1.5mm	35.2mm	33.3mm	8.0mm	12.8mm	13.4mm	22~32mm	50pcs
17644	EG-9	KSS	RCCN NYLON CABLE GLAND (WITH Metric)	15mm		9.9mm	7mm	8.1mm	13.9mm	15.2mm	4~8mm	
4366	PG-16	KSS	Plastic Bushing Glands	16mm	1.5mm	10.5mm	7(B2) /10(B3)	12mm	17mm	16.5mm	5~10mm	1
4367	PG-20	KSS	Plastic Bushing Glands	20mm	1.5mm	13.7mm	9 (B2) /13 (B3)	13mm	19mm	19.5mm	6~13mm	1
4368	PG-25	KSS	Plastic Bushing Glands	25mm	1.5mm	25mm	15 (B2) /20 (B3)	15mm	24.5mm	24.5mm	10~18mm	1
40417	PG-40	KSS	Plastic Bushing Glands	40mm	1.5mm	32mm	22mm	21mm	26.5mm	27.5mm	20~27mm	10pcs/parking

Strain Relief Bushing




Material: UL approved Nylon 66, 94V-2 (Black)
 Assemble according photos sequence above.
 Protect power cable from chassis.
 L type design facilitate power cord runs out.



Material: UL approved Nylon 66, 94V-2 (Black)
 Cust assembly cost, prolongs cord life. Used extensively for protecting cords of computer, apparatus ... Etc.



Material: UL approved Nylon 66, 94V-2 (Black)
 RCCN SNAP BUSHING smooth and insulate your raw-edged holes in metal chassis.
 Locking into hole firmly with fingertip pressure.
 Protect electrical cables, ropes, utility lines through metal holes.
 Available in application for chassis thickness from 0.8mm to 3.2mm

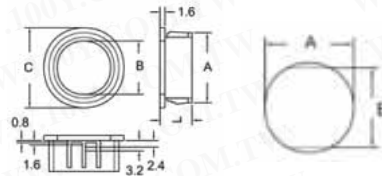

Part No.	Product No.	Manufacturer	Description	UL Listed	Shape	UL Listed	Cable outside diamet	A	B
12525	SB-26	KSS	Snap Bushing					25.5	
3091	SR-6P1	KSS	Strain Relief Bushing	SR-6P1 APPROVALS	Round	SJC 3C#18	7.4 ϕ ~8.2 ϕ	15.9mm	14.0mm
3092	SR-6R1	KSS	Strain Relief Bushing	SR-6R1 APPROVALS	Round	SJ,SJT 3C#16	8.2ϕ-9.2ϕ	15.9mm	14.0mm
32143	SR-F21	KSS	Strain Relief Bushing	SR-F21 APPROVALS	Flat	SPT-1	2.3*4.5	9.5mm	8.7mm
32144	SR-F41	KSS	Strain Relief Bushing	SR-F42 APPROVALS	Flat	SPT-2	3.0*7.1	12.7mm	11.8mm
3068	SR-F42	KSS	Strain Relief Bushing	SR-F42 APPROVALS	Flat	SPT-2	3.0*7.1	12.7mm	11.8mm
3090	SR-F51	KSS	Strain Relief Bushing	SR-F51	Flat	SPT-3	5*10.4	14.3mm	13.2mm
13428	SR-F53	KSS	KSS Cable Collect Tie	SR-F53	Flat	SPT-3	5*10.4	14.3mm	13.2mm



T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen : 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai : 100y-1@163.com