


CABLES / WIRES & ACCESSORIES

Extention Wires & Connectors

Detailed product specifications are available on: us.100y.com.tw

Extention Wires

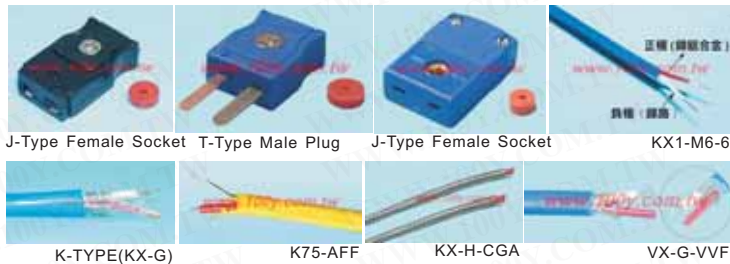

- KX-H-CGA Insulation approved
- Environment temperature rang: 0~200°C
- Bearable to harmful gas corrosion and solvents, high temperature resisting, good electric insulating property, high mechanical strength and stable chemical property and the high temperature resisting grade uses a PTFE insulating layer and features withstanding acid, alkali and oil, combustion resisting, non-water absorbance and good insulating performance

Part No.	Product No.	Description	Color	Extention Wire Mark	+ (color)	- (color)	Length/Reel
16589	J-Type Female socket	Do-it-Yourself Female Mini-Connector J-Type					
8814	K-TYPE(KX-G)	JIS C 1610-1981 Extention Wire (For Thermoelectricity Use)	Green	K	cr (Red)	al (White)	100M/R
19501	K75-AFF	Extention Wire(For Thermo-element)	Yellow	K	cr (Red)	al (White)	200M
23966	KX-H-CGA	Extention Wire		K			200M
13164	KX1-M6-6	Extention Wire(For Thermo-element)	Blue(JIS)	K	cr (Red)	al (White)	200M
19722	T-Type Male plug	Do-it-Yourself Male Mini-Connector T-Type					
13017	TC-TF	Temperature Extention Wire -50°C~200°C	Yellow	K	cr(Red)	al(White)	200M/R
19723	TJ-Type Female socket	Do-it-Yourself Female Mini-Connector T-Type					
18399	VX-G-VVF	Inside Insulation Extention Wire	Blue	K	cr (Red)	al (White)	100M


Speaker And Power Cable Stranded Power Wire

Detailed product specifications are available on: us.100y.com.tw




0120

- Conformation : 0.14*14core*2
- OD : 8.0mm
- Material : OCC
- Length : 60M/R
- Application : balance wire



OV183C-6

- Copper wire
- PVC insulation
- Water-proof PVC jacket
- Rated temperature : 60°C, 75°C, 105°C
- Vated voltage : 300volts

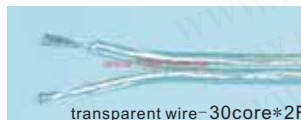

transparent wire-30core*2F

- Operating voltage : 300
- Temperature rating : 20°C to 60°C
- Stranded copper wire
- Black wire with white polarity stripe



OCC05

- OCC copper wire spec: multi-core, knited by diameter 0.07mm OCC copper wire
- Diameter: 3mm
- Inside dia: 1.48mm
- Material: blue PVC jacket



S-075

- Conductor use copper or tinned cooper wire 16-32AWG
- Rated temperature: 80°C
- Rated voltage: 300volts
- Character: resist acid, alkal, oil, damp, mildew



VVF122FTI



IVB551CGTI



Insulation wire 1.6*1C-G



R-1.6A-T



VVR203

Part No.	Product No.	Manufacturer	Description	AWG	No. / mm	Length/Reel	UL/CSA Type
16290	0120		Parallel		0.14*14Core*2	60M/R	
8813	IVB551CGTI		PVC Green Stranded Power Wire 600V	5.5mm2	1C	100M/R	Ⓢ NO.2566
33612	OCC05		OCC Multicore Copper Wire 1.48mm Blue		1.48mm	10M	
8735	OV183C-6		UL/CSA SVT UL-type Circle Stranded Power Wire	18*3C	41/0.16	305M/R	SVT-E77873 VW-1
12047	R-1.6A-T		PVC Plastical Insulated 1 Core Copper Wire -Red		1.6mm	100M./R	S:400007, CED:PW01002
8850	S-075		PVC Flat Stranded Power Wire- White	0.75	30/0.18mm*2C	100M/R	
13883	S-075		PVC Flat Cable	0.75	30/0.18mm*2C	100M/R	
8851	S-1.25		PVC Flat Stranded Power Wire -White	1.25	50/0.18mm*2C	100M/R	
13884	S-1.25		PVC Flat Cable	1.25	50/0.18mm*2C	100M/R	
8755	VVF122FTI		Flat Stranded Power Wire PVC 600V VVF	1.2mm	2C	100M/R	Ⓢ NO.3223
8753	VVF162FTI		Flat Stranded Power Wire PVC 600V VVF	1.6mm	2C	100M/R	Ⓢ NO.3198
13912	VVF162FTI		White Flat PVC 600V VVF	1.6mm	2C	100M/R	Ⓢ NO.3198
8754	VVF202FTI		Flat Stranded Power Wire PVC 600V VVF	2.0mm	2C	91.44M/R	Ⓢ NO.3198
13913	VVF202FTI		White Flat PVC 600V VVF	2.0mm	7/0.6mm	100M/R	Ⓢ NO.3198
8812	VVR203		Stranded Power Wire PVC VVR	2mm2	3C	100M/R	Ⓢ NO.3233
12046	transparent wire-100core*2F	SINYU	Stranded Power Wire		100C*2F	100Y(91.44M)/R	
8905	transparent wire -30 core *2F	SINYU	Stranded Power Wire		30C*2F	100Y(91.44M)/R	
8906	transparent wire -50 core *2F	SINYU	Stranded Power Wire 300V		50C/0.12mm*2C	100Y(91.44M)/R	
13431	Insulation wire 1.6*1C-G		1 Core Copper Wire 1.6mm*1C Green		1.6mm	100M/R	
13429	Insulation wire 1.6*1C-Red		1 Core Copper Wire 1.6mm*1C Red		1.6mm	100M/R	
13430	Insulation wire 1.6*1C-Blue		1 Core Copper Wire 1.6mm*1C Blue		1.6mm	100M/R	



T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai: 100y-1@163.com