



MULTIPOLE-CONNECTORS & TOOLS

2.54mm DIN 41612 Mount Connector & Socket

Detailed product specifications are available on: us.100y.com.tw



ELECTRICAL CHARACTERISTICS

- Current rating: 2AMP
- Dielectric withstanding voltage: AC 1000V for 1 minute
- Insulator resistance: 1000MΩ min. At DC 500V
- Contact resistance: 30mΩ max. At DC 100mA
- Operating temperature: -55°C~105°C

MATERIAL

- Housing: 30% Glass filled PBT UL94-10
- Contacts: phosphor bronze



Part No.	Product No.	Description	Type	90°/180°	2/3 row body	Pins	On board
14621	D32	2.54mm DIN41612 Connector	Male	180°	3 rows	48P	ABC
14623	D40	2.54mm DIN41612 Connector	Male	180°	2 rows	32P	AB




ELECTRICAL CHARACTERISTICS

- Current rating: 2AMP
- Dielectric withstanding voltage: AC 1000V for 1 minute
- Insulator resistance: 1000MΩ min. At DC 500V
- Contact resistance: 30mΩ max. At DC 100mA
- Operating temperature: -55°C~105°C

MATERIAL

- Housing: 30% Glass filled PBT UL94-10
- Contacts: phosphor bronze

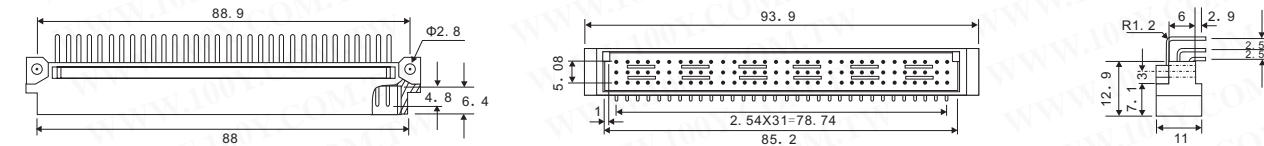

Part No.	Product No.	Description	Type	90°/180°	2/3 row body	Pins	On board
20332	D33-ABC	2.54mm DIN41612 Connector	Female	90°	3 row	96P	ABC




ELECTRICAL CHARACTERISTICS

- Current rating: 2AMP
- Dielectric withstanding voltage: AC 1000V for 1 minute
- Insulator resistance: 1000MΩ min. At DC 500V
- Contact resistance: 30mΩ max. At DC 100mA
- Operating temperature: -55°C~105°C

MATERIAL

- Housing: 30% Glass filled PBT UL94-10
- Contacts: phosphor bronze

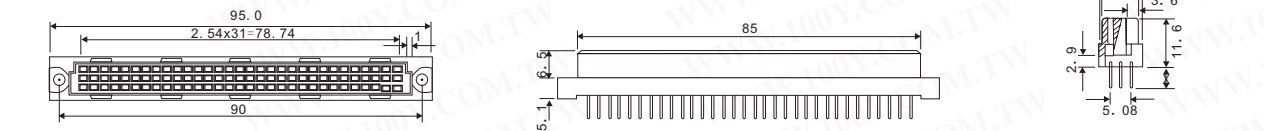

Part No.	Product No.	Description	Type	90°/180°	2/3 row body	Pins	On board
23234	D34	2.54mm DIN41612 Connector	Female	90°	3 rows	48P	ABC




ELECTRICAL CHARACTERISTICS

- Current rating: 2AMP
- Dielectric withstanding voltage: AC 1000V for 1 minute
- Insulator resistance: 1000MΩ min. At DC 500V
- Contact resistance: 30mΩ max. At DC 100mA
- Operating temperature: -55°C~105°C

MATERIAL

- Housing: 30% Glass filled PBT UL94-10
- Contacts: phosphor bronze

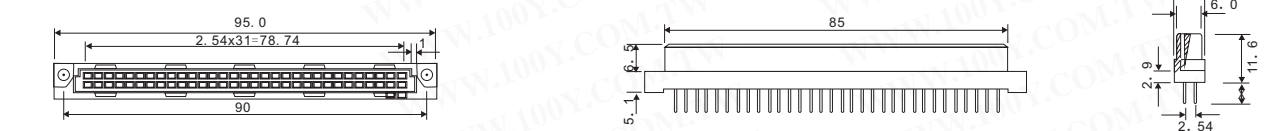

Part No.	Product No.	Description	Type	90°/180°	2/3 row body	Pins	On board
18688	D35-1	2.54mm DIN41612 Connector	Female	180°	2 row	64P	ABC
23233	D43	2.54mm DIN41612 Connector	Female	180°	2 rows	64P	AB

