



# MULTIPOLE-CONNECTORS & TOOLS

## PCI Direct PCB Edge Connectors



Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



Part No.	Product No.	Description
40197	B47-4	P.C.I. Connector 164P

## AGP Direct PCB Edge Connectors

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)

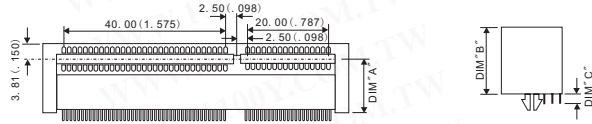

Part No.	Product No.	Description	Contact Centers	Mounting Ears Yes/No	Pins
14577	B58	AGP Direct PCB Edge Connectors	Tin	No	2*62Pins

## IDC Socket Connectors 2.54mm 180° Center Low Profile Header For IDC Socket

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)






### MATERIAL

- Contact: brass 0.64mm square pin
- Insulator: P. B. T+30%G. F
- Plated: gold flash

### SPECIFICATION:

- Current rating: 3A
- Withstanding voltage: 500VAC (1min)
- Insulation resistance: 1000Megohms Min
- Contact resistance: 30 milliohms max
- Operating temperature: -40°C to +85°C
- Retention force: 1Kg Min

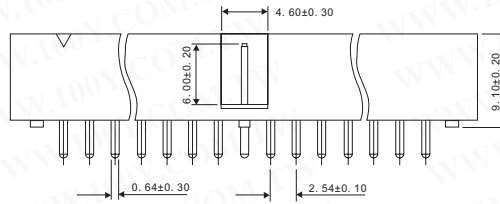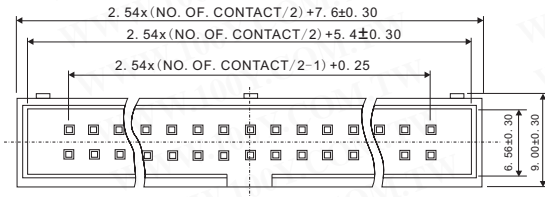

Part No.	Product No.	Description	Contacts
4018	320-10	2.54mm 180° Center Low Profile Header For IDC Socket	10P
4017	320-14	2.54mm 180° Center Low Profile Header For IDC Socket	14P
2325	320-16	2.54mm 180° Center Low Profile Header For IDC Socket	16P
4814	320-20	2.54mm 180° Center Low Profile Header For IDC Socket	20P
4815	320-26	2.54mm 180° Center Low Profile Header For IDC Socket	26P
2324	320-30	2.54mm 180° Center Low Profile Header For IDC Socket	30P
4020	320-34	2.54mm 180° Center Low Profile Header For IDC Socket	34P
4021	320-40	2.54mm 180° Center Low Profile Header For IDC Socket	40P
2323	320-50	2.54mm 180° Center Low Profile Header For IDC Socket	50P
4022	320-60	2.54mm 180° Center Low Profile Header For IDC Socket	60P
4023	320-64	2.54mm 180° Center Low Profile Header For IDC Socket	64P
40707	D05-6P	2.54mm 180° Center Low Profile Header For IDC Socket	6P

## 3M\_2.54mm 180° Center Low Profile Header For IDC Socket

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



### MATERIAL

- Contact: brass 0.64mm square pin
- Insulator: P. B. T+30%G. F
- Plated: gold flash

### SPECIFICATION:

- Current rating: 3A
- Withstanding voltage: 500VAC (1min)
- Insulation resistance: 1000Megohms Min
- Contact resistance: 30 milliohms max
- Operating temperature: -40°C to +85°C
- Retention force: 1Kg Min

