

MULTIPOLE-CONNECTORS & TOOLS

3M_2.54mm IDC Socket Con

Detailed product specifications are available on: us.100y.com.tw





ELECTRICAL CHARACTERISTICS

- Current rating: 1Amp
- Insulator resistance: 5000MΩ min at DC 500V
- Contact resistance: 20mΩ max. at DC 100mA
- Operating temperature: -55°C~+105°C


MATERIAL

- Housing: 30% glass filled PBT UL94V-0
- Contact: phosphor bronze
- Plating: selective gold plated: gold plated on mating area and nickel plated on wire cutting area
- Gold plated: 3u" over 50u" nickel
- Cable: 0.635mm (0.025) pitch flat cable



FEATURES

- Optional polarizing key, polarizing bump
- Optional strain relief
- Choice of gold plated or selective gold plated

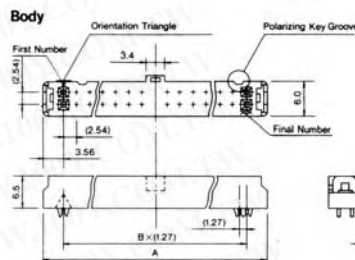

Unit: mm

Part No.	Product No.	Manufacturer	Description	Contacts
7463	DY-10S+SR	3M	3M_2.54mm IDC Socket Connectors	10P
3799	DY-14S+SR	3M	3M_2.54mm IDC Socket Connectors	14P
7462	DY-16S+SR	3M	3M_2.54mm IDC Socket Connectors	16P
11323	DY-20S+SR	3M	3M_2.54mm IDC Socket Connectors	20P
7757	DY-26S+SR	3M	3M_2.54mm IDC Socket Connectors	26P
10711	DY-30S-SR	3M	3M_2.54mm IDC Socket Connectors	30P
11279	DY-34S+SR	3M	3M_2.54mm IDC Socket Connectors	34P
10712	DY-40S+SR	3M	3M_2.54mm IDC Socket Connectors	40P
7461	DY-50S+SR	3M	3M_2.54mm IDC Socket Connectors	50P
11419	DY-60S+SR	3M	3M_2.54mm IDC Socket Connectors	60P
11979	DY-64S+SR	3M	2.54mm IDC Socket Connectors	64P

2.54mm IDC Flat Cable Male Plugs

Detailed product specifications are available on: us.100y.com.tw



MATERIAL


- Housing: 30% glass filled PBT UL94V-0
- Contact: brass
- Plating: selective gold plated: gold plated on mating area and nickel plated on wire
- Cutting area
- Cable: 1.27mm (0.050") pitch flat cable

ELECTRICAL CHARACTERISTICS

- Current rating: 1AMP
- Insulator resistance: 5000MΩ min at DC500V
- Contact resistance: 20MΩ max at DC100V
- Operating temperature: -55°C~+105°C

FEATURES

- Fully shrouded provides ultimate reliability
- Mounting ears optional

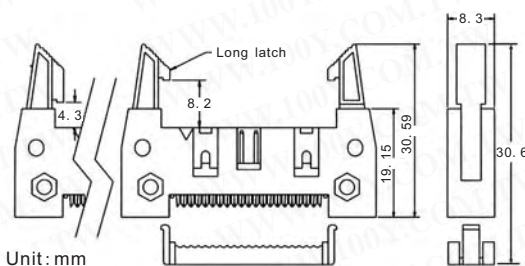

Unit: mm

Part No.	Product No.	Description	Contacts
3762	D08-10P	2.54mm IDC Flat Cable Male Plugs	10P
4185	D08-14P	2.54mm IDC Flat Cable Male Plugs	14P
4191	D08-16P	2.54mm IDC Flat Cable Male Plugs	16P
3803	D08-20P	2.54mm IDC Flat Cable Male Plugs	20P
17848	D08-24P	2.54mm IDC Flat Cable Male Plugs	24P
4184	D08-26P	2.54mm IDC Flat Cable Male Plugs	26P
4183	D08-34P	2.54mm IDC Flat Cable Male Plugs	34P
2363	D08-40P	2.54mm IDC Flat Cable Male Plugs	40P
4186	D08-50P	2.54mm IDC Flat Cable Male Plugs	50P
3812	D08-60P	2.54mm IDC Flat Cable Male Plugs	60P
4187	D08-64P	2.54mm IDC Flat Cable Male Plugs	64P



MATERIAL

- Housing: 30% glass filled PBT UL94V-0
- Contact: brass
- Plating: selective gold plated: gold plated on mating area and nickel plated on wire cutting area
- Cable: 1.27mm (0.050") pitch flat cable

ELECTRICAL CHARACTERISTICS

- Current rating: 1AMP
- Insulator resistance: 5000MΩ min at DC500V
- Contact resistance: 20MΩ max at DC100mA
- Operating temperature: -55°C~+105°C

FEATURES

- Fully shrouded provides ultimate reliability
- With polarization
- Mounting ears optional

● We provide various product for your choice and help you develop infinite commercial chance!

[Http://us.100y.com.tw/](http://us.100y.com.tw/)

Centenary Materials



T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai: 100y-1@163.com