



RF/COAXIAL-CONNECTORS & TOOLS

D-Subminiature 90° PC Mount Connectors

Detailed product specifications are available on: us.100y.com.tw




SPECIFICATION


- Current rating: 5Amps
- Withstanding voltage: 1000VAC
- Insulation resistance: 5000Megohms min
- Contact resistance: 25 miliohms max
- Operating temperature: -55°C to +105°C

MATERIAL

- Contact: brass
- Insulator: P. B. T. +30% (UL94V-0)
- Shell: stell

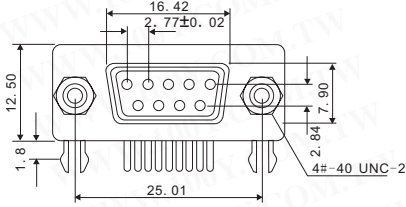

Unit: mm

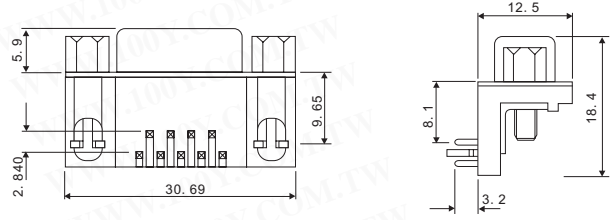

Part No.	Product No.	Description
3363	361-09-10	D-Subminiature 90°, PC Mount conctors (9Pins)
3364	361-15-10	D-Subminiature 90°, PC Mount conctors (15Pins)
1934	361-25-10E	D-Subminiature 90°, PC Mount conctors (25 Pins)
1987	361-37-10	D-Subminiature 90°, PC Mount conctors (37Pins)



MATERIAL




- Housing: 30% glass filled PBT UL94V-0
- Contacts: brass

ELECTRICAL CHARACTERISTICS


- Current rating: 1Amp
- Insulator resistance: 5000MQ Min at DC 500V
- Contact resistance: 20MQ Max at DC 100mA
- Operating temperature: -55°C~+105°C

Positions	A	B	C
9	30.81	24.99	16.92
15	39.14	33.32	25.25
25	53.04	47.04	38.96
37	69.32	63.50	55.42

Unit: mm

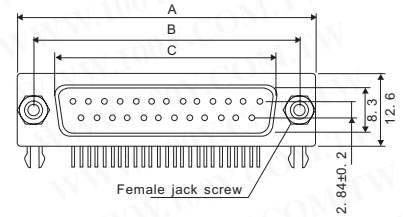

Part No.	Product No.	Description
1936	370-25-10	D-Subminiature 90°, PC Mount conctors (25Pins)
3365	371-09-10	D-Subminiature 90°, PC Mount conctors (9Pins)
3366	371-15-10	D-Subminiature 90°, PC Mount conctors (15Pins)
3323	371-37-10	D-Subminiature 90°, PC Mount conctors (37Pins)



SPECIFICATION

- Rated current: 5A
- Rated voltage: 300V DC
- Withstanding voltage: 500V (r. m. s) AC for 1 min
- Insulation resistance: more than 1000M ohm at 500V DC

- Contact resistance: 13m ohm max
- Dielectric strength: 1000V for 1 min
- Temperature: -55°C~+105°C

Part No.	Product No.	Description
13354	540-78	HDRS78GB1D2 D-Subminiature 90°, PC Mount conctors (4 Rows / 78Pins)




MATERIAL

- Housing: 30% glass filled PBT UL94V-0
- Contacts: brass



Position	A	B	C	D
37	55.42	63.50	69.32	57.70
50	52.86	61.11	66.90	55.30

ELECTRICAL CHARACTERISTICS

- Current rating: 1Amp
- Insulator resistance: 5000MQ Min at DC 500V
- Contact resistance: 20MQ Max at DC 100mA
- Operating temperature: -55°C~+105°C



Unit: mm

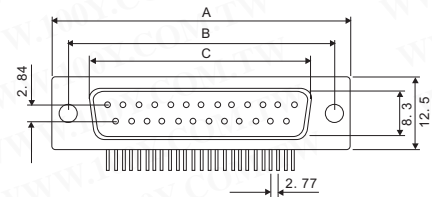

Part No.	Product No.	Description
17141	E05-50P	D-Subminiature 90°, PC Mount conctors (50 Pins)
20598	E06-50P	D-Subminiature 90°, PC Mount conctors (50 Pins)



T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai: 100y-1@163.com