



# RF / COAXIAL - CONNECTORS & TOOLS


## 2.54mm Male Headers(Gold)-Single Row

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



### SPECIFICATION

- Current rating: 3A
- Withstanding voltage: 800VAC (1 minute)
- Insulation resistance: 1000Megohms min
- Contact resistance: 30 milliohms max
- Operation temperature: -40°C to +85°C
- Retention force: 750g min

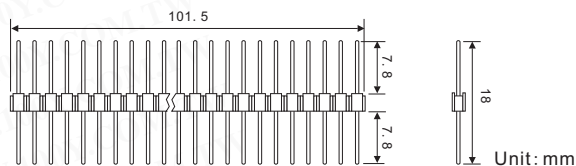


Part No.	Product No.	Description	Angle	Pins 1 * ?	Up(mm)	Down(mm)	Length(mm)
4686	D15-40P/18MM	2.54mm Single Row Pin Headers	180°	1*40	7.8	7.8	18



### SPECIFICATION

- Current rate: 1Amp
- Insulation resistance: 5000MΩ min, at DC 500V
- Contact resistance: 20MΩ max.at DC 100mA
- Operation temperature: -55°C to +105°C

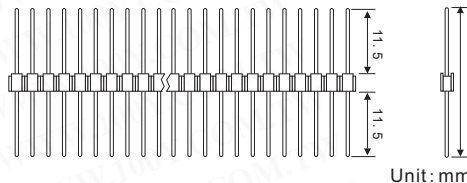

Part No.	Product No.	Description	Angle	Pins 1 * ?	Up(mm)	Down(mm)	Length(mm)
12323	PHS140GB1153	2.54mm Single Row Pin Headers	180°	1*40	11.5	11.5	25



### SPECIFICATION

- Current rating: 3 Amps
- Insulator resistance: 500 Megohms min
- Dielectric withstanding: AC 500V
- Operating temperature: -40°C~+105°C
- Contact material: brass
- Insulator material: polyester, UL 94V-0
- Standard: PBT

- Finish: gold plated
- Solperring ability: 95% in 245°C+5°C
- Contact resistance: 30 milliohms max

### APPLICATION AND FEATURES

- Side and end stackable
- Notches for easy breakable
- Made with mini jumper and P. C board socket connectors

Part No.	Product No.	Description	Angle	Pins 1 * ?	Up(mm)	Down(mm)	Length(mm)
23894	PPHS1-88-40-122	2.54mm Single Row Pin Headers	180°	1*40	5	3	18

## 2.54mm Male Headers(Gold)-2 Row

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)




### SPECIFICATION

- Current rate: 1AMP
- Insulation resistance: 5000MΩ min. at DC 500V
- Contact resistance: 20MΩ max. at DC 100mA
- Operation temperature: -55°C to +105°C

### MATERIAL

- Insulator: 30% glass fiber PBT
- Contact pin: brass

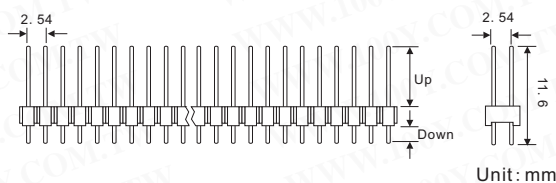

Part No.	Product No.	Description	Angle	Up(mm)	Pins 2 * ?	Down(mm)	Length(mm)
28499	D13-06P	P:2.54mm Double Row Straight Pin Headers	180°	6	2*3	3.3	11.6
28084	D13-08P	P:2.54mm Double Row Straight Pin Headers	180°	6	2*4	3.3	11.6
28085	D13-12P	P:2.54mm Male Headers(Gold)-2 Row	180°	6	2*6		11.6
3823	D13-80P	P:2.54mm Double Row Straight Pin Headers	180°	6	2*40	3.3	11.6




### SPECIFICATION


- Current rate: 1AMP
- Insulation resistance: 5000MΩ min. at DC 500V
- Contact resistance: 20MΩ max. at DC 100mA
- Operation temperature: -55°C to +105°C

### MATERIAL

- Insulator: 30% glass fiber PBT UL94V-0
- Contact pin: brass
- Plated: gold plated

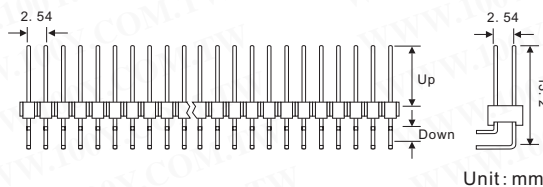


Part No.	Product No.	Description	Angle	Up(mm)	Pins 2 * ?	Down(mm)	Length(mm)
7779	D14-80P	2.54mm Double Row Straight Pin Headers	90°	6	2*40	3.3	13.2



### SPECIFICATION

- Current rate: 1AMP
- Insulation resistance: 5000MΩ min. at DC 500V
- Contact resistance: 20MΩ max. at DC 100mA
- Operation temperature: -55°C to +125°C

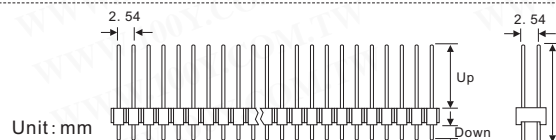

Part No.	Product No.	Description	Angle	Up(mm)	Pins 2 * ?	Down(mm)	Length(mm)
3473	D15-80P/18MM	2.54mm Double Row Straight Pin Headers	180°	12.8	40*2	3.3	18

