



RF / COAXIAL - CONNECTORS & TOOLS


2.0mm Male Headers(Gold)- Single Row

Detailed product specifications are available on: us.100y.com.tw



SPECIFICATION

- Current rating: 1A
- Withstanding voltage: 600VAC (1minute)
- Insulation resistance: 1000Megohms min
- Contact resistance: 30 milliohms max
- Operating temperature: -40°C to 85°C

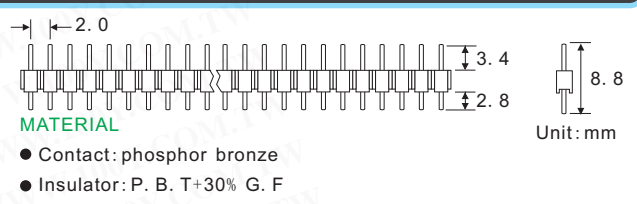


Part No.	Product No.	Description	Pins	Angle	Up(mm)	Down(mm)	Length(mm)
3824	D22-40P	2.0mm Male Header (Gold)- Single Row	1*40	180°	3.4	2.8	8.8



SPECIFICATION

- Current rating: 1A
- Withstanding voltage: 600VAC (1minute)
- Insulation resistance: 1000Megohms min
- Contact resistance: 30 milliohms max
- Operating temperature: -40°C to 85°C

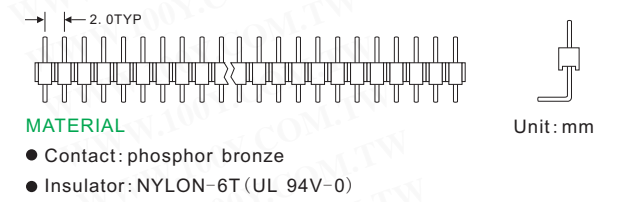

Part No.	Product No.	Description	Pins	Angle	Up(mm)	Down(mm)	Length(mm)
31972	D48-20P	2.0mm Male Header (Gold)- Single Row	1*20	90°			
17114	D48-40P	2.0mm Male Header (Gold)- Single Row	1*40	90°	5mm	4mm	10mm

2.0mm Male Headers(Gold)- Double Row

Detailed product specifications are available on: us.100y.com.tw




SPECIFICATION

- Current rate: 1Amp
- Insulation resistance: 500MΩ min. at DC 500V
- Contact resistance: 20MΩ max. at DC 100mA
- Operation temperature: -55°C to +105°C

MATERIAL

- Insulator: 30% glass fiber PBT
- Contact pin: brass

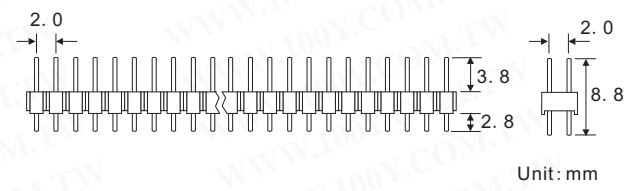

Part No.	Product No.	Description	Pins	Angle	Up(mm)	Down(mm)	Length(mm)
28083	D23-16P	2.0mm Male Header (Gold)- Double Row	2*8	180°	3.8	2.8	8.8
28082	D23-40P	2.0mm Male Header (Gold)- Double Row	180°	3.8	2*20	2.8	8.8
3768	D23-80P	2.0mm Male Header (Gold)- Double Row	2*40	180°	3.8	2.8	8.8




SPECIFICATION

- Current rating: 1A
- Withstanding voltage: 600VAC (1minute)
- Insulation resistance: 1000Megohms min
- Contact resistance: 30 milliohms max
- Operating temperature: -55°C to 105°C

MATERIAL


- Contact: phosphor bronze
- Insulator: NYLON-6T (UL 94V-0)

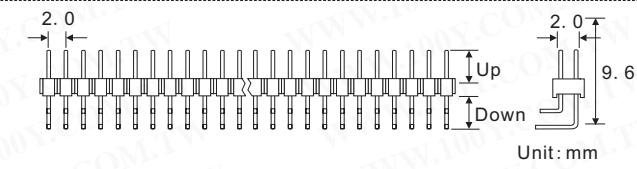

Part No.	Product No.	Description	Pins	Angle	Up(mm)	Down(mm)	Length(mm)
12431	D49-80P	2.0mm Male Header (Gold)- Double Row	2*40	90°	3.6	3.8	9.6

2.0mm Female Header Receptacles-Single Row

Detailed product specifications are available on: us.100y.com.tw




MATERIAL


- Contact: brass
- Insulator: PBT & 30% G. F
- Plated: gold flash

SPECIFICATION

- Current rating: 3A
- Withstanding voltage: 500 VAC (1 minute)
- Insulation resistance: 1000 Megohms min
- Contact resistance: 30 Milliohms max
- Operating temperature: -40°C to +85°C
- Resistance force: 450g min

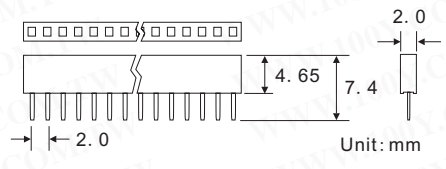

Part No.	Product No.	Description	Angle	Pins	Length(mm)
10961	880-12	2.0mm Female Header Receptacle - Single Rows	180°	1*12	4.65
8638	D24-20P	2.0mm Female Header Receptacle - Single Rows	180°	1*20	4.65




MATERIAL

- Contact: brass
- Insulator: PBT & 30% G. F
- Plated: gold flash

SPECIFICATION

- Current rating: 3A
- Withstanding voltage: 500 VAC (1 minute)
- Insulation resistance: 1000 Megohms min
- Contact resistance: 30 Milliohms max
- Operating temperature: -40°C to +85°C
- Resistance force: 450g min

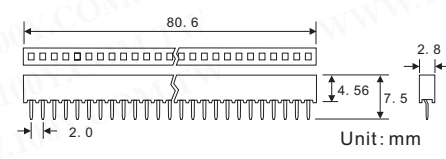

Part No.	Product No.	Description	Angle	Pins	Length(mm)
10493	880-40-HPFS140GB1	2.0mm Female Header Receptacle - Single Rows	180°	1*40	4.3



T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai: 100y-1@163.com