



RF / COAXIAL - CONNECTORS & TOOLS

2.0mm Female Header Receptacles-Single Row

Detailed product specifications are available on: us.100y.com.tw



2.0mm Female Header Receptacle - Single Rows

| Part No. | Product No. | Description | Angle | Pins | Length(mm) |
|----------|-------------|--|-------|------|------------|
| 31973 | D24-20PR | 2.0mm Female Header Receptacle - Single Rows | 90° | 1*20 | 4 |


2.0mm Female Header Receptacles-Double Row

Detailed product specifications are available on: us.100y.com.tw



SPECIFICATION

- Current rate: 1Amp
- Insulation resistance: 5000MΩ min
- Contact resistance: 20MΩ max
- Dielectric voltage: 500V AC for one minute
- Operation temperature: -40°C to +105°C

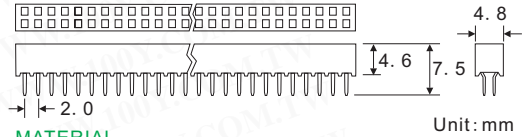

MATERIAL

- Insulator: Nylon 6T, UL94V-0
- Contact pin: phosphar bronze

| Part No. | Product No. | Description | Angle | Pins 2 * ? | Length(mm) |
|----------|-------------------|--|-------|------------|------------|
| 32948 | 890-08-HPFS208GB1 | 2.0mm Female Header Receptacle - Double Rows | 180° | 2*4 | 4.8 |
| 29355 | 890-32-HPFS250GB1 | 2.0mm Female Header Receptacle - Double Rows | 180° | 2*16 | 4.8 |
| 8751 | 890-34-HPFS234GB1 | 2.0mm Female Header Receptacle - Double Rows | 180° | 2*17 | 4.8 |
| 8740 | 890-40-HPFS240GB1 | 2.0mm Female Header Receptacle - Double Rows | 180° | 2*20 | 4.8 |
| 8752 | 890-50-HPFS250GB1 | 2.0mm Female Header Receptacle - Double Rows | 180° | 2*25 | 4.8 |
| 8750 | D25-20P | 2.0mm Female Header Receptacle - Double Rows | 180° | 2*10 | 4.8 |
| 32652 | D25-24P | 2.0mm Female Header Receptacle - Double Rows | 180° | 2*12 | 4.8 |
| 32653 | D25-32P | 2.0mm Female Header Receptacle - Double Rows | 180° | 2*16 | 4.8 |
| 40904 | D25-36P | 2.0mm Female Header Receptacle - Double Rows | 180° | 2*18 | 4.8 |
| 32654 | D25-46P | 2.0mm Female Header Receptacle - Double Rows | 180° | 2*23 | 4.8 |




SPECIFICATION

- Current rating: 1A
- Withstanding voltage: 500VAC (1minute)
- Insulation resistance: 1000 Megohms min
- Contact resistance: 30 milliohms max
- Operating temperature: -55°C to +105°C
- Retention force: 450g min

MATERIAL

- Contact: phospho bronze
- Insulator: PBT & 30% G. F
- Plated: gold flash

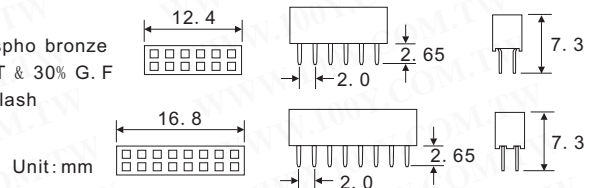

| Part No. | Product No. | Description | Angle | Pins 2 * ? | Length(mm) |
|----------|-------------------|--|-------|------------|------------|
| 8748 | 890-12-HPFS212GB1 | 2.0mm Female Header Receptacle - Double Rows | 180° | 2*6 | 4.8 |
| 8749 | 890-16-HPFS216GB1 | 2.0mm Female Header Receptacle - Double Rows | 180° | 2*8 | 4.8 |
| 17959 | 890-30-HPFS230GB1 | 2.0mm Female Header Receptacle - Double Rows | 180° | 2*15 | 4.8 |



SPECIFICATION

- Current rate: 1Amp
- Insulation resistance: 5000MΩ min
- Contact resistance: 20MΩ max
- Dielectric voltage: 500V AC for one minute
- Operation temperature: -40°C to +105°C


MATERIAL

- Insulator: Nylon 6T, UL94V-0
- Contact pin: phosphar bronze

| Part No. | Product No. | Description | Angle | Pins 2 * ? | Length(mm) |
|----------|-------------|--|-------|------------|------------|
| 27148 | D25-20PR | 2.0mm Female Header Receptacle - Double Rows | 90° | 2*20 | 7 |

2.54mm & 2.0mm Jumper

Detailed product specifications are available on: us.100y.com.tw




SPECIFICATION

- Current rate: 1Amp
- Insulation resistance: 5000MΩ min
- Contact resistance: 20MΩ max
- Dielectric voltage: 500V AC for one minute
- Operation temperature: -55°C to +105°C

MATERIAL

- Insulator: 30% glass fiber PBT
- Contact pin: brass phosphor bronze

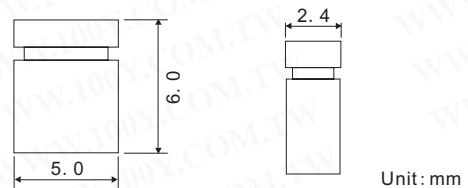

| Part No. | Product No. | Description | Length(mm) | Pitch |
|----------|-------------|--------------------------|------------|--------|
| 17981 | 46-02 | 2.54mm Jumper Close Type | 6mm | 2.54mm |

