



# RF / COAXIAL - CONNECTORS & TOOLS

## 2.54mm & 2.0mm Jumper

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)




### SPECIFICATION

- Current rate: 1Amp
- Insulation resistance: 5000MΩ min
- Contact resistance: 20MΩ max
- Dielectric voltage: 500V AC for one minute
- Operation temperature: -55°C to +105°C

### MATERIAL

- Insulator: 30% glass fiber PBT
- Contact pin: phosphor bronze

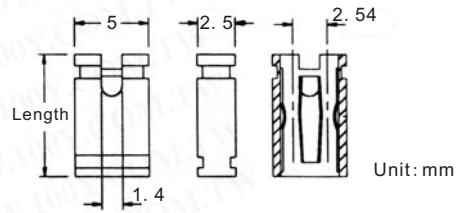

Part No.	Product No.	Description	Length(mm)	Pitch
3516	D10-B2/4.5mm	2.54mm Jumper	Top Open,Black /H: 4.5mm	2.54mm
2720	D10-B2/6mm	2.54mm Jumper	Top Open,Black / H:6mm	2.54mm
2328	D10-B2/8mm	2.54mm Jumper	Top Open,Black / H:8mm	2.54mm



Part No.	Product No.	Description	Length(mm)	Pitch
28178	D10-B2-1	2.54mm Jumper	Top Open, Yellow / H:6mm	2.54mm
32106	D10-B3	2.0mm Jumper	Top Open,Black / H:6mm	2.0mm




### SPECIFICATION

- Current rate: 1Amp
- Insulation resistance: 5000MΩ min
- Contact resistance: 20MΩ max
- Dielectric voltage: 500V AC for one minute
- Operation temperature: -55°C to +105°C

### MATERIAL

- Insulator: 30% glass fiber PBT
- Contact pin: brass phosphor bronze

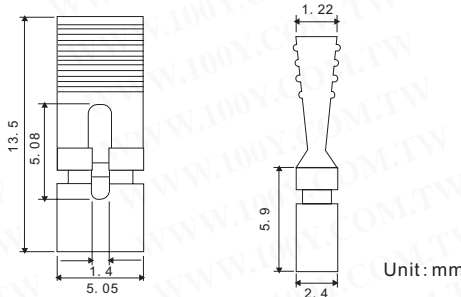

Part No.	Product No.	Description	Length(mm)	Pitch
23277	D10-D	2.54mm Jumper	Top Open,Black /H: 13mm	2.54mm




### SPECIFICATION

- Current rate: 1Amp
- Insulation resistance: 5000MΩ min
- Contact resistance: 20MΩ max
- Dielectric voltage: 250V AC for one minute
- Operation temperature: -55°C to +105°C

### MATERIAL

- Insulator: 30% glass fiber PBT
- Contact pin: phosphor bronze



Part No.	Product No.	Description	Length(mm)	Pitch
4135	D26-2.0mm	2.0mm Jumper	Top Open, Black / 2.0mm	2.0mm

## Terminal Blocks/PCB Mounted Screw Terminals MA / MB Series-PCB Type Terminal Blocks

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



### MATERIAL

- Terminal: brass, tin plated
- Wire protector: stainless strip steel
- Insulating body: polyester
- Screw: M3. 0, steel, Ni plated
- Color: blue

### ENVIRONMENTAL

- Operation temperature: -33°C to 105°C
- Short-time temperature: up to 250°C (392°F)

### ELECTRICAL

- Current rating: 16Amp AC 250V
- Insulation withstands volt: AC 1500V min
- Insulation resistance: >5000MΩ DC 500V
- PCB hole Dia: φ 1. 4mm
- Wire strip length: 4~5mm
- Wire range: 16~24 AWG
- Screw torque: 4. 0 lb-inch



Part No.	Product No.	Manufacturer	Description	Terminal	Angle	Pin Dist.
23949	MA412-500M-2B	DECA	Series-PCB Terminal Blocks 250V16A	2P	180°	5.00mm
23951	MA412-500M-3B	DECA	Series-PCB Terminal Blocks 250V16A	3P	180°	5.00mm

● We provide various product for your choice and help you develop infinite commercial chance!

[Http://us.100y.com.tw/](http://us.100y.com.tw/)

**Centenary Materials**

Waiting for your phone call



T E L : Taiwan: 886-3-5753170  
 F A X : Taiwan: 886-3-5753172  
 E-mail : Taiwan: us\_sale@100y.com.tw

Shenzhen: 86-755-83298787  
 Shenzhen: 86-755-83640655  
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736  
 Shanghai: 86-21-64605107  
 Shanghai: 100y-1@163.com