




RF / COAXIAL - CONNECTORS & TOOLS


7009 Series 3.96mm Housing , Header(Wafer) & Crimp Terminal

Detailed product specifications are available on: us.100y.com.tw

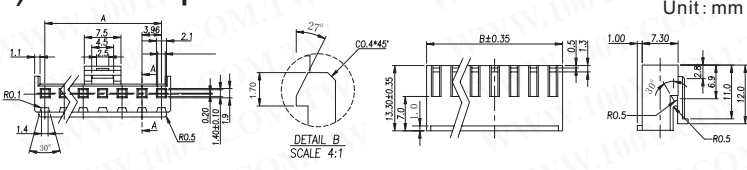

Part No	Product No	DIM. A	DIM. B
2333	F22-02P	3.96	8.4
7836	F22-03P	7.92	12.4
7835	F22-04P	11.88	16.3
5056	F22-05P	15.84	19.7
11668	F22-06P	19.80	24.2

Part No.	Product No.	Description	M/F Socket/ Head	Pins
2333	F22-02P	7009 Series 3.96mm Housing, Header VH	Female	02P
7836	F22-03P	7009 Series 3.96mm Housing, Header VH	Female	3P
7835	F22-04P	7009 Series 3.96mm Housing, Header VH	Female	4P
5056	F22-05P	7009 Series 3.96mm Housing, Header VH	Female	5P
11668	F22-06P	7009 Series 3.96mm Housing, Header VH	Female	6P
32052	F22-07P	7009 Series 3.96mm Housing, Header VH	Female	7P
32053	F22-08P	7009 Series 3.96mm Housing, Header VH	Female	8P

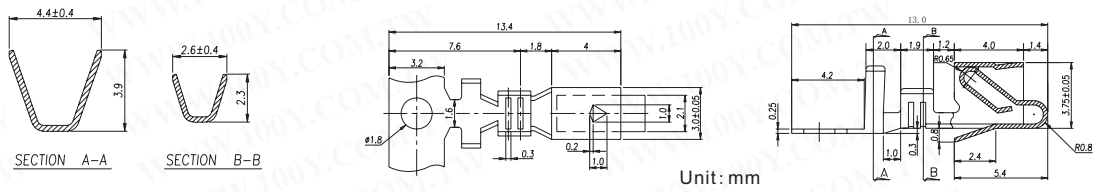

NOTES
 Material: C2680R-H
 Finish: tin plated
 Ordering information: T-7009-B3T100

Part No.	Product No.	Description	Packing
14251	T-7009-B3T100	7009T Tin-Plated Pin Terminal	4,000PCS/R


5080 Series 5.08mm Housing, Terminal, Header

Detailed product specifications are available on: us.100y.com.tw



- FEATURES**
- 2-20 circuits
 - 45° (1.14mm) square or round wire pins
 - Nylon (UL 94V-2)
 - right angle or straight pins
 - mate with center crimp connector

- SPECIFICATION**
- Current rating: 7A AC, DC
 - Voltage rating: 250V AC, maximum
 - Temperature range: -25°C~+90°C
 - Contact resistance: Initial value/10mΩ max
After environmental testing/20mΩ max
 - Insulation resistance: 1.000 MΩ min
 - Withstand voltage: 1500V AC/minute
 - Applicable PC board thickness: 0.63" (1.6mm)

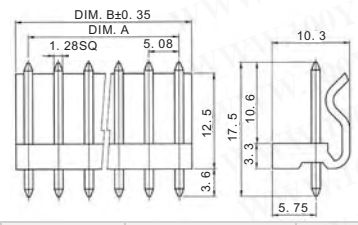

Part No	Product No	DIM. A	DIM. B
4628	F24-02P	5.08	10.17
4629	F24-04P	15.24	20.32
4630	F24-06P	25.40	30.48
4632	F24-08P	35.56	40.64
4799	F24-10P	45.72	50.80
4634	F24-12P	55.88	60.96

Part No.	Product No.	Description	M/F Socket/ Head	Pins	Angle	Pitch
4628	F24-02P	5081P Center Straight-Friction Lock Header	Male Header Male	2P	180°	5.08mm
27878	F24-03P	5080 Series 5.08mm Housing	Male Header Male	2P	180°	5.08mm
4629	F24-04P	5081P Center Straight-Friction Lock Header	Male Header Male	4P	180°	5.08mm
4630	F24-06P	5081P Center Straight-Friction Lock Header	Male Header Male	6P	180°	5.08mm
4632	F24-08P	5081P Center Straight-Friction Lock Header	Male Header Male	8P	180°	5.08mm
4799	F24-10P	5081P Center Straight-Friction Lock Header	Male Header Male	10P	180°	5.08mm
4634	F24-12P	5081P Center Straight-Friction Lock Header	Male Header Male	12P	180°	5.08mm




- FEATURES**
- 1-20 circuits
 - With or without locking ramp
 - Nylon (UL 94V-0)
 - mates with 045(1014 mm) square or round pins
 - accepts double cantilever crimp terminal housing
 - available with integrally molded polarizing keys
 - terminal retention to mousing-8lbs (3.6kg) minimum

- Contact resistance: Initial value/10mΩ max
After environmental testing/20mΩ max
- Withstand voltage: 1500V ac/minute
- Applicable wires: awg#22~#18

Part No	Product No	DIM. A	DIM. B
4638	F26-02P	5.08	-----
4640	F26-04P	15.24	-----
4641	F26-06P	25.40	-----
4642	F26-08P	35.56	-----
4643	F26-10P	45.72	-----
4645	F26-12P	55.88	-----

- SPECIFICATION**
- Current rating: 7A AC DC
 - Temperature: 250V ac maximum
 - Temperature range: -25°C-90°C

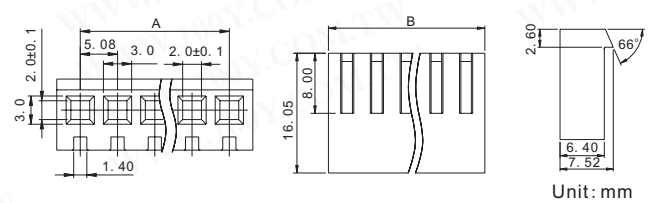

T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai: 100y-1@163.com