

RF/COAXIAL-CONNECTORS & TOOLS

5.08mm Disconnectable Disk Drive Power Connector & Pins

Detailed product specifications are available on: us.100y.com.tw



Unit: mm

MATERIAL

- Post: brass, tin/plated
- Base: nylon 66, UL94V-2

Part No.	Product No.	Description	Pins	M/F Socket/ Head	Angle
4496	F52-04 P	5.08mm Disconnectable Disk Drive Power Connector-PCB Mount Connector	4P	Male	180°



Unit: mm

MATERIAL

- Post: brass, tin/plated
- Base: nylon 66, UL94V-2


Part No.	Product No.	Description	Pins	M/F Socket/ Head	Angle
4605	F53-04P	5.08mm Disconnectable Disk Drive Power Connector-PCB Mount Connector	4P	Male	90°



T-7001-B30100



T-7001-B3T-100

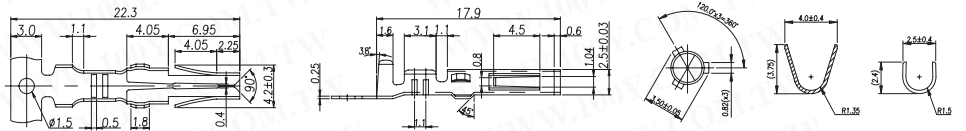

NOTES

- Material: C2680R-H, T=0.25mm
- Burrier: 0.05mm MAX


Part No.	Product No.	Description	Parking
13439	T-7001-B30100	7001T2 5.08mm Disconnectable Disk Drive Power Terminal	1,000PCS/R
14140	T-7001-B3T-100	CONTACT 7001T2 FLASH BRASS C2680R-H	5,000PCS/R



T-7004-B30100



T-7004-B3T-100

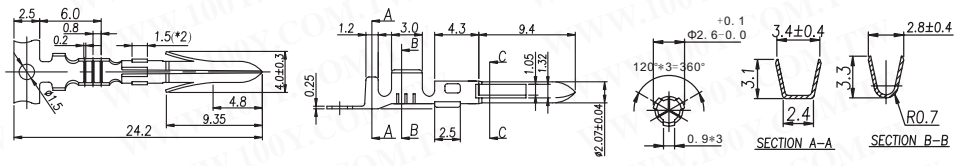

NOTES

- Material: C2680R-H, T=0.25mm
- Burrier: 0.05mm MAX

Part No.	Product No.	Description	Parking
13440	T-7004-B30100	CONTACT 7004T GOLD FLASH BRASS C2680R-H	1,000PCS/R
12546	T-7004-B3T-100	Contact 7004T-Brass C2680R-H	5,000PCS/R

"AMP" MATE-N-LOK ELECTRICAL CONNECTORS

Detailed product specifications are available on: us.100y.com.tw



SEARCHABLE FEATURES


- Connector line: Universal mate-n-lok
- Compact PCI: No
- Centerline, Matrix (mm (in)) : 6.35 (.250)
- Contact layout: in-line
- Mount: PCB thru mount
- Housing material: Nylon
- Lock type: Positive Lock
- Contact type: Pin
- High current: No
- Contact material: Phosphor Bronze
- PCB polarized: Non-Polarized
- PCB thickness (mm (in)) : 1.57 (0.062)
- Mount angle: Vertical
- Sealable: No
- Current rating (Amps.) : 19

OTHER PROPERTIES

- Contact mating area plating: Pre-tin
- Voltage (VAC) : 600
- Housing Flammability Rating: UL94V-2



Part No.	Product No.	Manufacturer	Description	Pins	M/F Socket/ Head	Angle
12308	0-350430-1	AMP	TEMP:105°C MAX /600V MAX	4P	Male	180°
40117	350428-1	AMP	Soft ShellPin and Socket Connectors		Pre-tin	

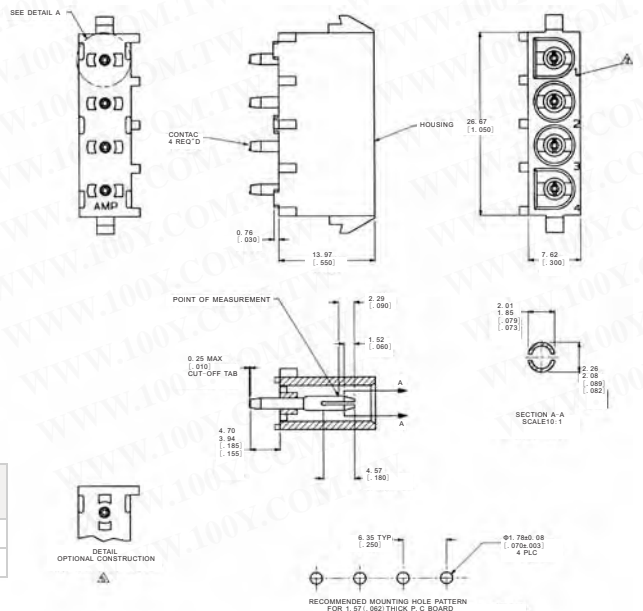

T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail: Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai: 100y-1@163.com