




# 7015 Series 2.0mm Housing, Terminal, Header

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)




Material: Nylon 66 UL94V-0/  
Nylon 66 UL94V-2  
Color: White/milk white

Part No.	Product No.	DIM. A	DIM. B
4454	F29-02P	2.00	5.80
4455	F29-03P	4.00	7.80
4456	F29-04P	6.00	9.80
4457	F29-05P	8.00	11.80
4458	F29-06P	10.00	13.80
4777	F29-07P	12.00	15.80
4459	F29-08P	14.00	17.80



Unit: mm

Part No.	Product No.	Description	Pitch	Pins	M/F Socket/ Head	Degree
4454	F29-02P	7015 Series Housing	2.0mm	2P	Female Housing	180°
4455	F29-03P	7015 Series Housing	2.0mm	3P	Female Housing	180°
4456	F29-04P	7015 Series Housing	2.0mm	4P	Female Housing	180°
4457	F29-05P	7015 Series Housing	2.0mm	5P	Female Housing	180°
4458	F29-06P	7015 Series Housing	2.0mm	6P	Female Housing	180°
4777	F29-07P	7015 Series Housing	2.0mm	7P	Female Housing	180°
4459	F29-08P	7015 Series Housing	2.0mm	8P	Female Housing	180°
23738	F29-10P	7015 Series Housing	2.0mm	10P	Female Housing	180°
23739	F29-12P	7015 Series Housing	2.0mm	12P	Female Housing	180°

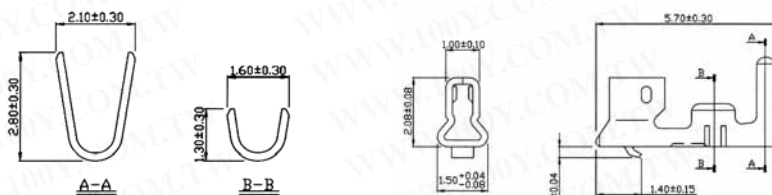

Unit: mm

Part No.	Product No.	Description	Packing	Pins	Applicable Wire
13760	7015	7015 Series Crimp Terminal	10,000Pcs/R	Female Terminal	#24-28


# 9001 Series 2.54mm Housing, Terminal, Header

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



**Terminal:** Material: 0.2Tphos, bronze, brass  
Plating: copper-undercoated tin-plated  
Wire range: suitable for AWG #22~#28

**Housing:** Material: Nylon 66, UL94V-0, V-2  
**Wafer:** Post: brass, 0.64 (.025") square pin, tin-plated  
Circuits: 2-20



Unit: mm

Part No.	Product No.	L	P1
4552	F09-02P	7.40	2.50
4553	F09-03P	9.90	5.00
4554	F09-04P	12.40	7.50
4555	F09-05P	14.90	10.00
4556	F09-06P	17.40	12.50
4557	F09-07P	19.90	15.00
4558	F09-08P	22.40	17.50
4560	F09-10P	27.4	22.50
4561	F09-12P	32.40	27.50
4562	F09-16P	42.40	37.50

Part No.	Product No.	Description	Pins	M/F Socket/ Head	Angle°	Pitch
4552	F09-02P	9001-2P Highly Reliable Disconnectable Connector 180°	2P	Male	180	2.5mm
4553	F09-03P	9001-3P 2.5mm(0.098") Pitch Highly Reliable Disconnectable Connector 180°	3P	Male	180	2.5mm
4554	F09-04P	9001-4P 2.5mm(0.098") Pitch Highly Reliable Disconnectable Connector 180°	4P	Male	180	2.5mm
4555	F09-05P	9001-5P 2.5mm(0.098") Pitch Highly Reliable Disconnectable Connector 180°	5P	Male	180	2.5mm
4556	F09-06P	9001-6P 2.5mm(0.098") Pitch Highly Reliable Disconnectable Connector 180°	6P	Male	180	2.5mm
4557	F09-07P	9001-7P 2.5mm(0.098") Pitch Highly Reliable Disconnectable Connector 180°	7P	Male	180	2.5mm
4558	F09-08P	9001-8P 2.5mm(0.098") Pitch Highly Reliable Disconnectable Connector 180°	8P	Male	180	2.5mm
4560	F09-10P	9001-10P 2.5mm(0.098") Pitch Highly Reliable Disconnectable Connector 180°	10P	Male	180	2.5mm
23491	F09-09P	9001-11P 2.5mm(0.098") Pitch Highly Reliable Disconnectable Connector 180°	9P	Male	180	2.5mm
23492	F09-11P	9001-11P 2.5mm(0.098") Pitch Highly Reliable Disconnectable Connector 180°	11P	Male	180	2.5mm
4561	F09-12P	9001-12P 2.5mm(0.098") Pitch Highly Reliable Disconnectable Connector 180°	12P	Male	180	2.5mm
30389	F09-14P	9001-14P Highly Reliable Disconnectable Connector 180°	14P	Male	180	2.5mm
4562	F09-16P	9001-16P 2.5mm(0.098") Pitch Highly Reliable Disconnectable Connector 180°	16P	Male	180	2.5mm
34336	F09-20P	9001-20P 2.5mm(0.098") Pitch Highly Reliable Disconnectable Connector 180°	20P	Male	180	2.5mm

- We provide a wide range of products to development and maintenance engineers in all type of business
- If you cannot find the components you want on the catalogue, please call us.

[Http://us.100y.com.tw/](http://us.100y.com.tw)

**Centenary Materials**  
Waiting for your phone call



T E L : Taiwan : 886-3-5753170  
F A X : Taiwan : 886-3-5753172  
E-mail : Taiwan : [us\\_sale@100y.com.tw](mailto:us_sale@100y.com.tw)

Shenzhen : 86-755-83298787  
Shenzhen : 86-755-83640655  
Shenzhen : 100y@163.com

Shanghai : 86-21-54151736  
Shanghai : 86-21-64605107  
Shanghai : 100y-1@163.com