




2540 Series 2.54mm Housing, Terminal, Header

Detailed product specifications are available on: us.100y.com.tw




- Part No: 2542A-H
- Poles: 2-15
- Material: Nylon66, UL94V-0 red
- Q' ty: 500, 1000pcs/roll

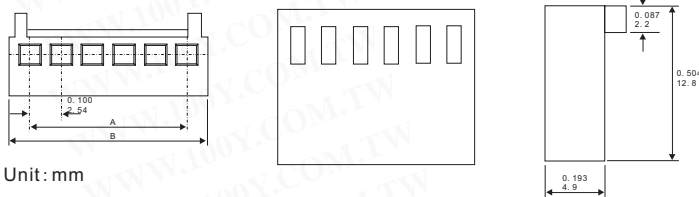

Part No.	Product No.	Description	Pins	M/F Socket/ Head	Angle °	Pitch
16975	2542A-H-2P	2542 Series Housing	2P	Female Housing	180°	2.54mm
16976	2542A-H-3P	2542 Series Housing	3P	Female Housing	180°	2.54mm



- Part No: 2542-WS (180o)
- Poles: 2-20
- Material: Post brass, gold/plated
Base: Nylon, UL94V-2
- Q' ty: 500, 1000pcs/roll

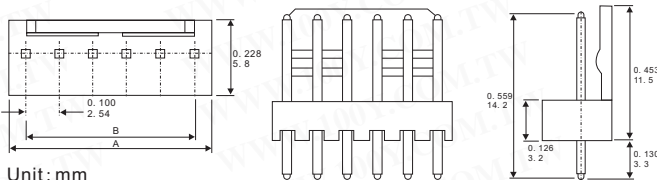

Part No.	Product No.	Description	Pins	M/F Socket/ Head	Angle °	Pitch
17120	2542A-UR-2P	2542 Series Right Angle Header	2P	Male Header	90°	2.54mm
17121	2542A-UR-3P	2542 Series Right Angle Header	3P	Male Header	90°	2.54mm
17118	2542A-US-2P	2542 Series Straight Header	2P	Male Header	180°	2.54mm
17119	2542A-US-3P	2542 Series Straight Header	3P	Male Header	180°	2.54mm


1250 Series 1.25mm Housing, Terminal, Header

Detailed product specifications are available on: us.100y.com.tw



SPECIFICATION

- Current rating: 1A AC, DC (AWG 26)
- Voltage rating: 125V AC, DC
- Withstand voltage: 250V AC/minute
- Contact resistance: 20MΩ max
- Insulation resistance: 100M min
- Temperature range: -40°C to +85°C
- Applicable PC board thickness: 0.8mm

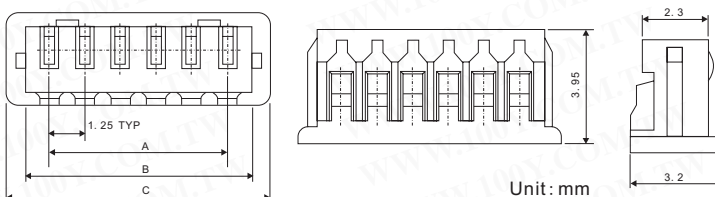


Part No.	Product No.	Description	Pins	M/F Socket/ Head	Angle °	Pitch
25788	1250S0203	1250S Single Row Housing	2P	Female Housing	180°	
25789	1250S0303	1250S Single Row Housing	3P	Female Housing	180°	
25790	1250S0403	1250S Single Row Housing	4P	Female Housing	180°	
25791	1250S0503	1250S Single Row Housing	5P	Female Housing	180°	
25792	1250S0603	1250S Single Row Housing	6P	Female Housing	180°	
25793	1250S0703	1250S Single Row Housing	7P	Female Housing	180°	
25794	1250S0803	1250S Single Row Housing	8P	Female Housing	180°	
25795	1250S0903	1250S Single Row Housing	9P	Female Housing	180°	
23815	1250S1003	1250S Single Row Housing	10P	Female Housing	180°	1.25mm
25796	1250S1103	1250S Single Row Housing	11P	Female Housing	180°	
25797	1250S1203	1250S Single Row Housing	12P	Female Housing	180°	
23816	1250S1503	1250S Single Row Housing	15P	Female Housing	180°	1.25mm



SPECIFICATION

- Current rating: 1A AC, DC (AWG 26)
- Voltage rating: 125V AC, DC
- Withstand voltage: 250V AC/minute
- Contact resistance: 20MΩ max
- Insulation resistance: 100M min
- Temperature range: -40°C to +85°C
- Applicable PC board thickness: 0.8mm

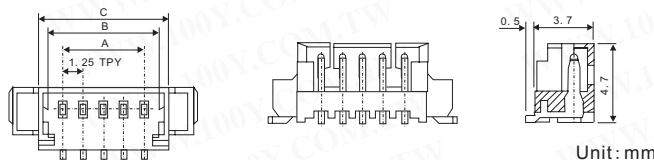

Part No.	Product No.	Description	Parking	Pins	M/F Socket/ Head	Angle °	Pitch
21368	1251P0210T-1	1251P Straight SMT Header	1000Pcs/R	2P	Male Header	180°	1.25mm
21369	1251P0310T	1251P Straight SMT Header	1000Pcs/R	3P	Male Header	180°	1.25mm
21370	1251P0410T	1251P Straight SMT Header	1000Pcs/R	4P	Male Header	180°	1.25mm
21371	1251P0510T	1251P Straight SMT Header	1000Pcs/R	5P	Male Header	180°	1.25mm
21372	1251P0610T	1251P Straight SMT Header	1000Pcs/R	6P	Male Header	180°	1.25mm
34349	1251P0810T	1251P Straight SMT Header	1000Pcs/R	8P	Male Header	180°	1.25mm

