




1250 Series 1.25mm Housing, Terminal, Header

Detailed product specifications are available on: us.100y.com.tw



SPECIFICATION

- Current rating: 1A AC, DC (AWG 26)
- Voltage rating: 125V AC, DC
- Withstand voltage: 250V AC/minute
- Contact resistance: 20MΩ max
- Insulation resistance: 100M min
- Temperature range: -40°C to +85°C
- Applicable PC board thickness: 0.8mm

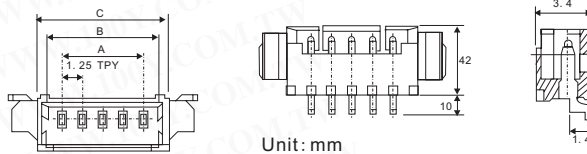


Unit: mm

Part No.	Product No.	Description	Packing	Pins	M/F Socket/ Head	Angle °	Pitch
21362	1252P0210T	1252P Right Angle SMT Header	1000Pcs/R	2P	Male Header	90°	1.25mm
21366	1252P0310T	1252P Right Angle SMT Header	1000Pcs/R	3P	Male Header	90°	1.25mm
21381	1252P0410T	1252P Right Angle SMT Header	1000Pcs/R	4P	Male Header	90°	1.25mm
21382	1252P0510T	1252P Right Angle SMT Header	1000Pcs/R	5P	Male Header	90°	1.25mm
21383	1252P0610T	1252P Right Angle SMT Header	1000Pcs/R	6P	Male Header	90°	1.25mm



SPECIFICATION

- Current rating: 1A AC, DC (AWG 26)
- Voltage rating: 125V AC, DC
- Withstand voltage: 250V AC/minute
- Contact resistance: 20MΩ max
- Insulation resistance: 100M min
- Temperature range: -40°C to +85°C
- Applicable PC board thickness: 0.8mm

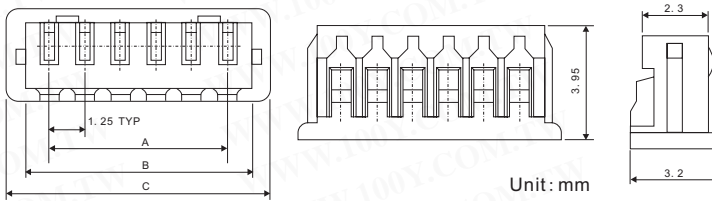

Unit: mm

Part No.	Product No.	M/F Socket/ Head	Cable No.
25798	1253T011P	Female Header	26~28


6350 Series 6.35mm Housing, Terminal, Header

Detailed product specifications are available on: us.100y.com.tw




SPECIFICATION

- Current rating: 10A AC, DC (AWG 14)
- Voltage rating: 600V AC, DC
- Withstand voltage: 5000V AC/minute
- Contact resistance: 10MΩ max
- Insulation resistance: 1000M min
- Temperature range: -55°C to +105°C
- Applicable PC board thickness: 1.6mm

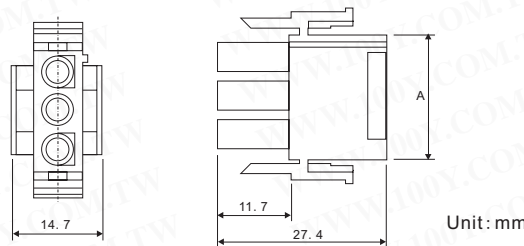


Unit: mm

Part No.	Product No.	Description	Pins	M/F Socket/ Head	Angle °	Pitch
23464	6350F0202	6350F Housing	2P	Female Housing	180°	6.35mm
23366	6350F0302	6350F Housing	3P	Female Housing	180°	6.35mm
23465	6350F0402	6350F Housing	3P	Female Housing	180°	6.35mm



SPECIFICATION

- Current rating: 10A AC, DC (AWG 14)
- Voltage rating: 600V AC, DC
- Withstand voltage: 5000V AC/minute
- Contact resistance: 10MΩ max
- Insulation resistance: 1000M min
- Temperature range: -55°C to +105°C
- Applicable PC board thickness: 1.6mm

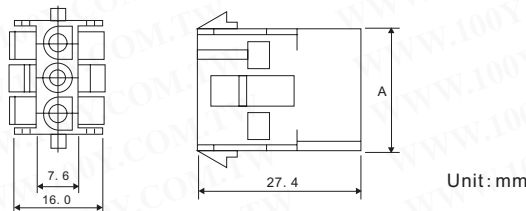

Unit: mm


Part No.	Product No.	Description	Pins	M/F Socket/ Head	Angle °	Pitch
23458	6350M0202	6350M Housing	2P	Male Housing	180°	6.35mm
23459	6350M0302	6350M Housing	3P	Male Housing	180°	6.35mm
23460	6350M0402	6350M Housing	4P	Male Housing	180°	6.35mm



SPECIFICATION

- Current rating: 10A AC, DC (AWG 14)
- Voltage rating: 600V AC, DC
- Withstand voltage: 5000V AC/minute
- Contact resistance: 10MΩ max
- Insulation resistance: 1000M min
- Temperature range: -55°C to +105°C
- Applicable PC board thickness: 1.6mm

Unit: mm

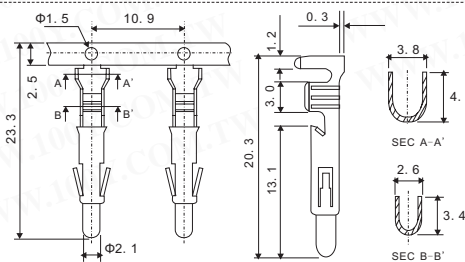

Part No.	Product No.	Description	Packing	M/F Socket/ Head	Applicable Wire
23463	6353TF12P	6353TM Terminal (Female)	4,000/R	Female Terminal	#14-18

