



X12 Series- Nickle Plated Industrial Circular connectors


Detailed product specifications are available on: us.100y.com.tw



WORKING CONDITION

- Series: 2core, 3core, 4core, 5core, 6core, 7core
- Environmental temperature: -55~+100°C
- Relative humidity: 98%, +400°C
- Vibration: 10~2000Hz
- Impact: 490m/s²
- Major technical condition
- Working current/voltage: 3A/3V

- Contact resistance: ≤10MΩ
- Withstand voltage: 1000V
- Insulation resistance: ≥5000MΩ
- Life: 500times

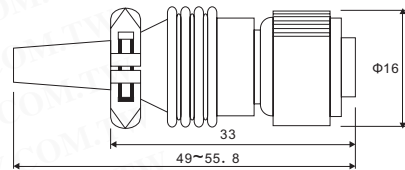

Part No.	Product No.	Description	Pins	M/F Plug/Socket	Rate Current/Voltage	Shell Size
15211	X12K3P+X12J3A	Nickle Plated Industrial Circular connector	3P	F Plug / M Socket	3A/300V	12mm
15210	X12K3P+X12J3Y	Nickle Plated Industrial Circular connector	3P	F Plug / M Socket	3A/300V	12mm
15214	X12K4P+X12J4A	Nickle Plated Industrial Circular connector	4P	F Plug / M Socket	3A/300V	12mm
29208	X12K4P+X12J4Y	Nickle Plated Industrial Circular connector	4P	F Plug / M Socket	3A/300V	12mm

X22 Series- Nickle Plated Industrial Circular connectors

Detailed product specifications are available on: us.100y.com.tw



4 core

- Rating current: 10*2 20*2
- Diameter: Φ2x2 Φ3x2
- Working voltage: 500 (AC. V rms)
- Voltage resistant: 1000 (AC. V) 1min
- Contact resistance <5mΩ
- Insulated resistance >500mΩ MΩ


10 core

- Rating current: 3
- Diameter: Φ*10
- Working voltage: 500 (AC. V rms)
- Voltage resistant: 1000 (AC. V) 1min
- Contact resistance <5mΩ
- Insulated resistance >500mΩ MΩ

Part No.	Product No.	Description	Pins	Rate Current/Voltage	Shell Size
37805	X22K10P+J10A	Square Metal connector 10P	10	3A/500VAC	1
38430	X22K4P+J4A	Square Metal connector 4P	4P	3A/500VAC	1

XS10 Series- Nickle Plated Industrial Circular connectors

Detailed product specifications are available on: us.100y.com.tw


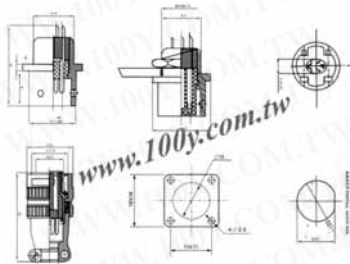


- XS10 working condition
- Environment temperature: -55+100°C
 - R. H: up to 98% when temperature is +40°C
 - Atmospheric pressure: up to 1kpa
 - Vibration: vibration frequency is 10~200Hz 150m/s²
 - Impact: acceleration up to 500m/s²
 - Centrifugal up to 500m/s²

Part No.	Product No.	Description	Pins	M/F Plug/Socket	Shell Size	Rate Current/Voltage
41056	XS10K2P+XS10J2Y	Nickle Plated Industrial Circular connectors	2P	F Plug/M Socket		10mm
29238	XS10K3P+XS10J3Y	Nickle Plated Industrial Circular connectors	3P	F Plug/M Socket	10mm	
29213	XS10K4P+XS10J4Y	Nickle Plated Industrial Circular connectors	4P	F Plug/M Socket	10mm	
29216	XS10K5P+XS10J5Y	Nickle Plated Industrial Circular connectors	5P	F Plug/M Socket	10mm	

XS16 Series- Nickle Plated Industrial Circular connectors

Detailed product specifications are available on: us.100y.com.tw

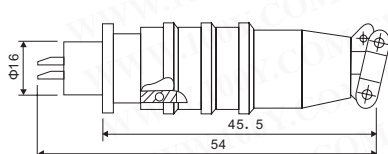

Part No.	Product No.	Description	Pins	M/F Plug/Socket	Rate Current/Voltage	Shell Size
36382	XS16K3P+XS16J3Y	Nickle Plated Industrial Circular connectors	3P	F Plug+ M Socket	3A/500V	16mm
36383	XS16K4P+XS16J4Y	Nickle Plated Industrial Circular connectors	4P	F Plug+ M Socket	3A/500V	16mm
36381	XS16K7P+XS16J7Y	Nickle Plated Industrial Circular connectors	7P	F Plug+ M Socket	3A/500V	16mm

