7011, 7012 Series

Detailed product specifications are available on: us. 100y. com. tw



Unit: mm



Sec. A-A



Sec. B-B

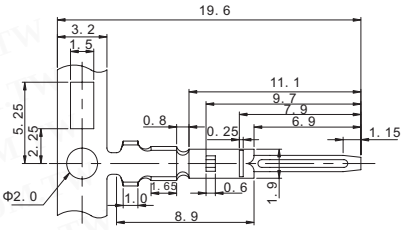

NOTES
- Material: C2680-H
- Finish: Tin plated
- Wire gauge AWG: 22~26
- Ordering information: T-7011-B3T100

Part No.	Product No.	Description	Packing
14247	T-7011-B3T100	7011RH Terminal	10,000PCS/R



Sec. A-A



Sec. B-B



Unit: mm



NOTES
- Material: Brass
- Finish: Tin plated
- Wire gauge AWG: 22~26
- Ordering information: T-7012-B3T100

Part No.	Product No.	Description	Packing
14250	T-7012-B3T100	7012PH Terminal	7,000PCS/R

9007, 9008(ψ2.36) Series

Detailed product specifications are available on: us. 100y. com. tw

HOUSING
- Material: Nylon 66, UL94V-0 V-2
- Pitch 9007 P(R)H, 9008 P(R)H: 5. 03(. 198″)
  9007-1 P(R)H, 9008 P(R)H: 6. 7(. 264″)
- Circuits: 1, 2, 3, 4, 5, 6, 9, 12, 15
- Receptable housing mates with PT 9007
- Plug housing mates with PT 9008

TERMINAL
- Material: 0. 25T, brass
- Plating: copper-undercoated, tin-plated
- Wire range: suitable for AWG#16~#26

Part No.	Product No.	Manufacturer	Description	Pins	M/F Socket/ Head	Pitch	Recive Head/YES	Input Head/YES
24859	P-9007-N2W10201		9007RH Series Connector	2P	Female	2.36	YES	NO
16794	P-9007-N2W10301		9007RH Series Connector	3P	Female	2.36	YES	NO
16795	P-9008-N2W10301	KINGFONT	9008PH Series 3P Connector	3P	Male	2.36	NO	YES

TERMINAL
- Material: 0. 25T, brass
- Plating: copper-undercoated, tin-plated
- Wire range: suitable for AWG#16~#26

HOUSING
- Material: Nylon 66, UL94V-0 V-2
- Pitch 9007 P(R)H, 9008 P(R)H: 5. 03(. 198″)
  9007-1 P(R)H, 9008 P(R)H: 6. 7(. 264″)
- Circuits: 1, 2, 3, 4, 5, 6, 9, 12, 15
- Receptable housing mates with PT 9007
- Plug housing mates with PT 9008

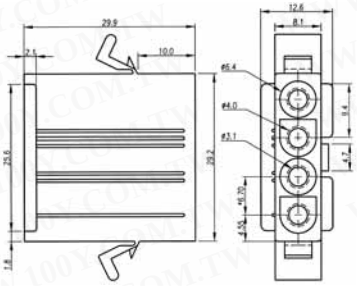

Unit: mm

Part No.	Product No.	Description	Pins	M/F Socket/ Head	Pitch	Recive Head/YES	Input Head/YES
14942	P-9007-N2W102B1	9007 Series Connector	2P	Male	2.36	NO	YES
14943	P-9007-N2W103B1	9007 Series Connector	3P	Male	2.36	NO	YES
14944	P-9007-N2W104B1	9007 Series Connectors	4P	Male	2.36	NO	YES

TERMINAL
- Material: 0. 25T, brass
- Plating: copper-undercoated, tin-plated
- Wire range: suitable for AWG#16~#26

HOUSING
- Material: Nylon 66, UL94V-0 V-2
- Pitch 9007 P(R)H, 9008 P(R)H: 5. 03(. 198″)
  9007-1 P(R)H, 9008 P(R)H: 6. 7(. 264″)
- Circuits: 1, 2, 3, 4, 5, 6, 9, 12, 15
- Receptable housing mates with PT 9007
- Plug housing mates with PT 9008



Unit: mm

Part No.	Product No.	Manufacturer	Description	Pins	M/F Socket/ Head	Pitch	Recive Head/YES	Input Head/YES
14945	P-9008-N2W10200	KINGFONT	9008 Series Housing	2P	Female	2.36	YES	NO
14946	P-9008-N2W10300	KINGFONT	9008 Series Housing	3P	Female	2.36	YES	NO
14947	P-9008-N2W10400	KINGFONT	9008 Series Housing	4P	Female	2.36	YES	NO