






## 5015, 5016 Series. Mate-N-Lok Male Female Connector & Crimp Terminal

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)

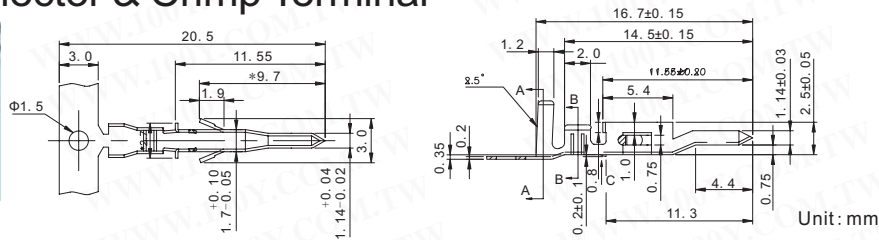

Part No.	Product No.	Description	Packing
14139	T-5015-B3T100	5015 Series Pin Terminal	5,000PCS/R

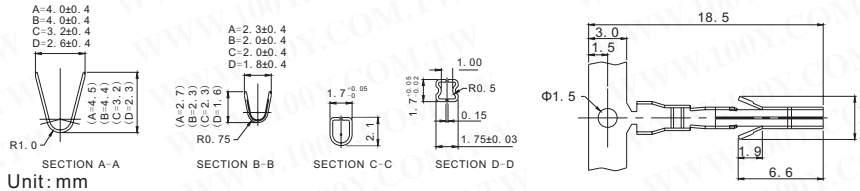

Part No.	Product No.	Description	Packing
40592	T-5016-B3TT00	5016 Mate-N-Lok Male Connector terminal	5,000PCS/R
41357	T-5016-B3TT02	5016 Mate-N-Lok Male Connector terminal	5,000PCS/R

## Terminal With Wire 2.0mm Terminal with Wire

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



### SPECIFICATION

- Rated current: 2A AC, DC
- Rated voltage: 250V AC, DC
- Temperature range: -25°C +85°C
- Withstand voltage: 800V/min
- Contact resistance: ≤0.01Ω
- Insulated resistance: ≥1000MΩ
- Wire range: AWG 30# - 24#

Part No.	Product No.	Description	Pin
28086	F29-02P-10CM		2P
9142	F29-02P-450E	AWG26/45CM 7015 Mate-N-Lok Female Connector+ Terminal Cable P:2mm	2P
7668	F29-03P-450E	AWG26/45CM 7015 Mate-N-Lok Female Connector+ Terminal Cable P:2mm	3P
7677	F29-04P-450E	AWG26/45CM 7015 Mate-N-Lok Female Connector+ Terminal Cable P:2mm	4P
9143	F29-05P-450E	AWG26/45CM 7015 Mate-N-Lok Female Connector+ Terminal Cable P:2mm	5P
9266	F29-06P-450E	AWG26/45CM 7015 Mate-N-Lok Female Connector+ Terminal Cable P:2mm	6P
7678	F29-07P-450E	AWG26/45CM 7015 Mate-N-Lok Female Connector+ Terminal Cable P:2mm	7P
10628	F29-08P-450E	AWG26/45CM 7015 Mate-N-Lok Female Connector+ Terminal Cable P:2mm	8 P



### SPECIFICATION


- Withstand voltage: AC250V
- Withstand current: 0.5A (AWG26 #1007UL Wire)
- Pin: 2p-20p
- Length: 45cm

Color: ● ● ● ● ● ●

Part No.	Product No.
12422	I53-PH/E1-450

## 1.25mm Terminal with Wire

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



### SPECIFICATION

- Current rating: 1A AC, DC (AWG26)
- Voltage rating: 125V AC, DC
- Withstand voltage: 250V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 100MΩ min
- Temperature range: -40°C to +85°C
- Applicable PC board thickness: 0.8mm

Part No.	Product No.	Description	Pin
41094	F78-150F		
21373	M7201001	1.25mm Terminal Cable 45CM	2P
21374	M7201002	1.25mm Terminal Cable 45CM	3P
21375	M7201003	1.25mm Terminal Cable 45CM	4P
21379	M7201004	1.25mm Terminal Cable 45CM	5P
21380	M7201005	1.25mm Terminal Cable 45CM	6P



T E L : Taiwan: 886-3-5753170  
 F A X : Taiwan: 886-3-5753172  
 E-mail : Taiwan: [us\\_sale@100y.com.tw](mailto:us_sale@100y.com.tw)

Shenzhen: 86-755-83298787  
 Shenzhen: 86-755-83640655  
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736  
 Shanghai: 86-21-64605107  
 Shanghai: 100y-1@163.com