



2.54mm Terminal with Wire

Detailed product specifications are available on: us.100y.com.tw

- Rated voltage: AC 250V
- Rated current: 1A

Color: ● ● ● ● ● ● ● ●

Part No.	Product No.	Description
12408	I43-XH/D1-450	#24 2.5mm Terminal Cable 45CM double-edged(grey, coffee, black, blue, red, yellow, white, green)



Color: ● ● ● ● ● ● ● ●

Part No.	Product No.	Description
12407	I50-SH/E1-450_ single-edged	Terminal Cable
12650	I50-SH/E2-450_double-edged	Terminal Cable 45CM



Part No.	Product No.	Description	Pin	Parking
14925	P111-hundred/B	#26 PH10P With 8P/2.54 8P wire	#26 2.54 8P/JAE2.0 10P	2.54mm Terminal

3.96mm Terminal with Wire

Detailed product specifications are available on: us.100y.com.tw

SPECIFICATION

- Rated current: 5A AC, DC
- Rated voltage: 250V AC, DC
- Temperature range: -25°C -85°C
- Withstand voltage: 1000V/min
- Contact resistance: $\leq 0.01\Omega$
- Insulated resistance: $\geq 1000M\Omega$
- Wire range: AWG 22#-18#

Part No.	Product No.	Description	Pin
9109	3195-2	3.96mm Terminal Cable 40CM	2P
28087	3195-2-10CM	3.96mm Terminal with Wire	2P
8374	3195-3	3.96mm Terminal Cable 40CM	3P
9108	3195-4	3.96mm Terminal Cable 40CM	4P
8375	3195-5	3.96mm Terminal Cable 40CM	5P
9110	3195-6	3.96mm Terminal Cable 40CM	6P
21979	3195-7	3.96mm Terminal Cable 40CM	7P



TERMINAL

- Material: 0.25T brass
- Plating: copper-undercoated, tin-plated

HOUSING

- Material: Nylon 66, UL 94V-0, V-2

WAFER

- Top entry: ATW-04
- Side entry: ATW-04R
- IDT Type: AHT-04
- Wire to wire type: AH-04, ARH-04
- Circuits: 4

Part No.	Product No.	Description	Pin
16135	F26-02P-300C	#22 5.08mm 30CM Terminal Cable	2P



- Rated voltage: AC 250V
- Rated current: 3A (use 1007 UL wire)

Color: ● ● ● ● ● ● ● ●

Part No.	Product No.	Description
12405	I17-D1-450	#22 3.96mm Terminal Cable 45CM



- Rated voltage: AC 250V
- Rated current: 3A (use 1007 UL wire)

Color: ● ● ● ● ● ● ● ●


Part No.	Product No.	Description
12406	I54-VH-450A	#18 VH Terminal Cable 45CM signal-edged
13321	I54-VH-450C/15	#22 1015 VH Terminal Cable

2.5mm Terminal with Wire

Detailed product specifications are available on: us.100y.com.tw

SPECIFICATION

- Current rating: 3A AC, DC (AWG)
- Voltage rating: 250V AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: 10m Ω max
- Insulation resistance: 500M Ω min
- Temperature range: -25°C to +85°C

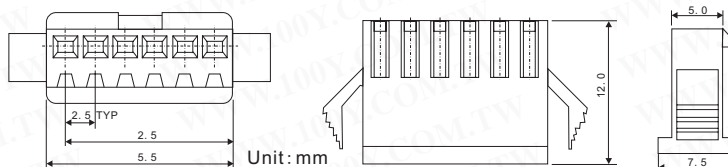

Part No.	Product No.	Description	Pin
22207	M7201009		2P
22208	M7201010		3P
22209	M7201011	2550F0400 head +45CM wire 2.5mm terminal wire /4P	4P
22210	M7201012	2550F0500 head +45CM wire 2.5mm terminal wire /5P	5P
22211	M7201013	2550F0500 head +45CM wire 2.5mm terminal wire /6P	6P

