




Miniature Insulated Crocodile Clips

Detailed product specifications are available on: us.100y.com.tw



- 10A
- DC500V 100MΩ
- AC500V 1minute
- -20°C~+80°C

MATERIAL
 Handle: PVC
 Clip: nickel plated steel

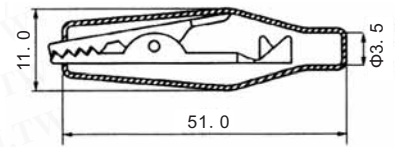

Part No.	Product No.	Description	Color	L(mm)
5814	3003-B	Miniature Insulated Crocodile Clips-Large	Black	50mm
5816	3003-BL	Miniature Insulated Crocodile Clips-Large	Blue	50mm
5850	3003-G	Miniature Insulated Crocodile Clips- Large	Green	50mm
2712	3003-R	Miniature Insulated Crocodile Clips-Large	Red	50mm
5851	3003-Y	Miniature Insulated Crocodile Clips-Large	Yellow	50mm



Alligator clip with large molded handle

Part No.	Product No.	Description	Color	L(mm)
5873	3005-B	Miniature Insulated Crocodile Clips-Large	Black	61
5869	3005-R	Miniature Insulated Crocodile Clips-Large	Red	61



- Charge current: 20A
- Package: 1PCS (Crocodile Clips+bushing)

Part No.	Product No.	Description	Color	L(mm)
2804	3007-B	20A Cell Clips	Black	90
2803	3007-R	20A Cell Clips	Red	90



- 50A
 - DC500V 100MΩ
 - AC500V 1minute
 - -20°C~+80°C
- MATERIAL**
 Handle: PVC
 Clip: gold-flash

Part No.	Product No.	Description	Color	L(mm)
10635	3010-B	50A Miniature Insulated Crocodile Clips-Large	Black	120
10634	3010-R	50A Miniature Insulated Crocodile Clips-Large	Red	120



Gold-plated, beryllium-copper, spring contacts accept probe tips from .076" to .084" (1.93mm to 2.13mm). standard jaw opening of .313" (8mm). 1000V, 10A rating, one red, one black, one year warranty

Part No.	Product No.	Manufacturer	Description	Color
36339	AC70A	FLUKE	FLUKE_AC70A Alligator Clips	RED/BLACK




- Max input voltage/current: 100V DC/35A
- Resistance: 16MΩ
- Ringent rance: 35mm
- Termination: Φ4mm diameter pin and socket

Part No.	Product No.	Description	Color	L(mm)
16661	L12-0600-05	Miniature Insulated Crocodile Clips	Red, Black	82mm



- Safety dolphin clip with all-round insulation
- Toothed jaws for wide grip with surface for fine wire
- Φ4mm safety socket in insulator to fit on all spring-loaded Φ4mm plugs

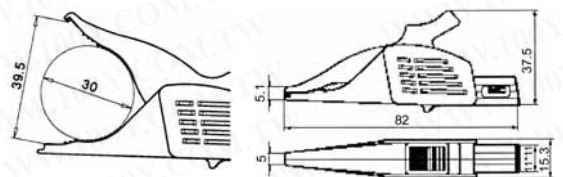

Part No.	Product No.	Description	Color	L(mm)
14917	MC-66.9575-21	XDK-1033 DOLPHIN CLIPS,	Black	92
14920	MC-66.9575-22	XDK-1033 DOLPHIN CLIPS	Red	92
14921	MC-66.9575-24	XDK-1033 DOLPHIN CLIPS	Yellow	92
14922	MC-66.9575-25	XDK-1033 DOLPHIN CLIPS	Green	92

Type	XDK-1033
Rated voltage	100V, CAT III
Rated current	PA
Insulation	Max. 32A
Operating temperature	-40°C-80°C
Metal parts	Brass, nickel-plated
Clamping limit	Max, 30mm, see sketch

