




IEC AC Power Rewireable Cable Connector

Detailed product specifications are available on: us.100y.com.tw



Ampere	16	16	16	32	32	32
Pole	3	4	5	3	4	5
a	118	124	131	146	146	152
b	82	88	95	100	100	106
c	47	53	61	63	63	70
K	6-15	6-15	8-16	10-20	10-20	12-22
SW	38	38	42	50	50	50

Part No.	Product No.	Manufacturer	Description	Male/Female Plug	Current (A)	Voltage (VAC)	Terminals	Agency Approvals
35541	023-6	PCE	Plug "Twist"	32A-6h/2P+E/50+60Hz Typ 023	220-250V	3PIN	VDE, OVE, CE	IP44 Plug 230V 3PIN
18803	025-6	PCE	Plug "Twist"	IP44 Plug 400V 5PIN	32A-6h/~3P+N+E/50+60Hz Typ 025	240-415V	5PIN	VDE, OVE, CE
37064	025-9	PCE	Plug "Twist"	IP44 Plug 230V 5PIN	32A-9h/~3P+N+E/50+60Hz Typ 025	144-250V	5PIN	VDE, OVE, CE



Current (A) :16A
Voltage (VAC) :230V~250V



Part No.	Product No.	Description	Male/Female Plug	Current (A)	Voltage (VAC)
3222	02980	AC Power Cable Connector	Male	16A	230V~250V




With cable gland
Nickel-plated contacts with pilot contact

Part No.	Product No.	Manufacturer	Description	Male/Female Plug	Current (A)	Voltage (VAC)	Terminals
33912	035-9	PCE	Plug "Twist"	IP67 Plug 230V 5PIN	63A-9h/3P+N+E/50+60Hz Typ 035	230V	3PIN



SPECIFICATIONS

- Rating: 10A 250VAC
- Insulation resistance: DC500V 100MΩ(min)
- Dielectric strength: AC 2000V/1 minute
- Housing material: nylon#66 UL94V-2 or 94V-0

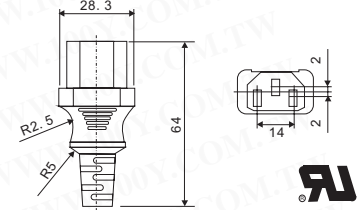


Part No.	Product No.	Description	Male/Female Plug	Current (A)	Voltage (VAC)
10016	1099	3-Conductor AC Power Rewireable Cable Connector	M	10A	250V




SPECIFICATIONS

- Rating: 10A 250VAC
- Insulation resistance: DC500V 100MΩ(min)
- Dielectric strength: AC 2000V/1 minute
- Housing material: nylon#66 UL94V-2 or 94V-0

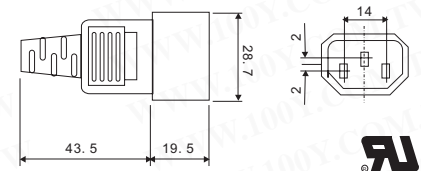

Part No.	Product No.	Description	Male/Female Plug
7694	2001	3-Conductor Rewireable Cable Connector	Female Plug



Poles	16Amp			32Amp		
	3	4	5	3	4	5
a	129	135	142	159	159	165
b	76	80	89	92	92	98
K	6-15	6-15	8-16	10-12	10-12	12-22
Sw	38	38	42	50	50	50
Weight	129	145	183	205	219	255



Part No.	Product No.	Manufacturer	Description	Male/Female Plug	Current (A)	Voltage (VAC)	Terminals	Agency Approvals
13212	223-6	PCE	Conner Twist-Blue	IP44 Connector 230V 3PIN	32A-6h/~2P+E/50+60Hz Typ 223	220-250V	3PIN	VDE, OVE, CE
35138	225-6	PCE	Conner "Twist"	IP44 Connector 400V 5PIN	32A-6h/~3P+N+E/50+60Hz Typ 225	240-415V	5PIN	VDE, OVE, CE



Y Type 3P Plug 20A

Part No.	Product No.	Description	Male/Female Plug	Current (A)	Voltage (VAC)	Terminals
19495	LK-6320	Y Type 3P Plug 20A	M	20A	250V	3P

