



DC Axial Fan

Detailed product specifications are available on: us.100y.com.tw



- P/N: H. G
- Rating voltage (VDC) :12
- Power current (AMP) :0. 12
- Power consumption (WATTS) :1. 4
- Speed (RPM) :5200
- Air flow (CFM) :16. 5
- Static pressur (Inch-H2O) :0. 17
- Noise (dBA) :35
- Weight (g) :27



Part No.	Product No.	Manufacturer	Description	Size(mm)	Volt.	r.p.m	Current(A)	Watts	Air Flow(CFM)	Noise (dBA)	Ball/Sleeve
38726	KD1206PFS1.G(9).GN	SUNON	"SUNON" 12VDC Axial Fan RoHS	60*60*10mm	12Vdc	4000	0.135A	1.6W	16	28.5	Sleeve




- P/N: H. G
- Rating voltage (VDC) :12
- Power current (AMP) :0. 16
- Power consumption (WATTS) :1. 9
- Speed (RPM) :4300
- Air flow (CFM) :22. 5
- Static pressure (Inch-H2O) :0. 20
- Noise (dBA) :33. 5
- Weight (g) :59



Part No.	Product No.	Manufacturer	Description	Size(mm)	Volt.	r.p.m	Current(A)	Watts	Air Flow(CFM)	Noise (dBA)	Ball/Sleeve
40179	KD1206PTS1.H.M	SUNON	"SUNON" DC Axial Fan	60*60*25mm	12	4300	0.16A	1.9	22.5	33.5	Sleeve



- 39 to 51 CFM
- 12 and 24 VDC (nominal)
- Patented Single-coil Brushless DC Motor Design
- Locked rotor protection
- Available with 4 poles motor or 6 poles motor
- Locked rotor protection
- Polarity protected
- Lubricated sintered sleeve bearing system or precision ball bearing system
- 24 AWG UL rating leadwire "+ red and "- black
- UL, CUR & TUV approval

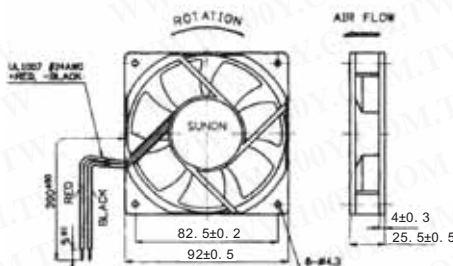


Unit: mm

Part No.	Product No.	Manufacturer	Description	Size(mm)	Volt.	r.p.m	Watts	Air Flow(CFM)	Noise (dBA)	Ball/Sleeve
1210 4	KD1209PTB1	SUNON	"SUNON" DC Axial Fan (Special Order)	92*92*25	12V	2700	2.5	49	34.5	Ball
16804	KD1209PTS1-H	SUNON	"SUNON" 12VDC Axial Fan	92*92*25mm	12Vdc	2500	2.6W	45.5	33	Sleeve



- 83 to 120 CFM
- 12 and 24 VDC (nominal)
- Patented Single-coil Brushless 6 holes DC Motor Design
- DC Motor Protected by IC
- Locked rotor protection
- Polarity protected
- Lubricated sintered sleeve bearing system or precision ball bearing system
- 24 AWG UL rating leadwire "+ red and "- black
- UL, CUR & TUV approval

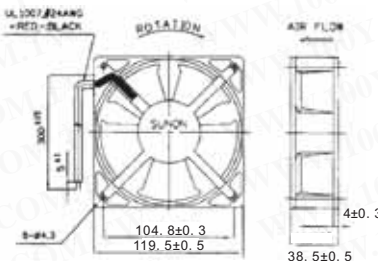


Unit: mm

Part No.	Product No.	Manufacturer	Description	Size(mm)	Volt.	r.p.m	Current(A)	Watts	Air Flow(CFM)	Noise (dBA)	Ball/Sleeve
12001	KD1212PMSX-6A	SUNON	"SUNON" DC Axial Fan	120*120*38mm	12VDC	3100	0.63	7.6	119	45	Sleeve
12105	KD1212PTB1-6A	SUNON	"SUNON" DC Axial Fan (Special Order)	120*120*25	12V	3100		4.8	90	44.5	Ball
5004	KD1212PTB2-6A	SUNON	"SUNON" DC Axial Fan	120*120*25mm	12Vdc	2800	0.30	3.6W	80	41	Ball
16412	KD2412PMB1-6A	SUNON	"SUNON" DC Axial Fan	120*120*25	24VDC	3100	0.31	6.7	108	42	Two Ball Bearing
16297	KD2412PMB1-6A	SUNON	"SUNON" DC Axial Fan	120*120*38	24VDC	3100	0.31	6.7	108	42	Two Ball Bearing
7781	KD2412PMS1-6A	SUNON	"SUNON" DC Axial Fan	120*120*38	24V	3000	0.31	7.4	107	41	Sleeve
10631	KD2412PMSX-6A	SUNON	"SUNON" DC Axial Fan	120*120*38mm	24Vdc	3100	0.33	7.9	119	45	Sleeve
16444	KD2412PTS1-6A	SUNON	"SUNON" DC Axial Fan	120*120*25mm	24	3000	0.25A	6W	88	44	Sleeve Bearing
16227	KD2412PTS2-6A	SUNON	"SUNON" DC Axial Fan	120*120*25mm	24	2700	0.2A	4.8	78	40	Sleeve Bearing
1790	KD4812PMS1-6A	SUNON	"SUNON" DC Axial Fan	120*120*38mm	48Vdc	2900		9.1W	132.5	46	Sleeve
13334	KS2412PTS2-6A	SUNON	DC AxialFan	120*120*25mm	24V	2700		4.8	78	40	Sleeve



- 5. 5 to 9. 0 CFM
- 5 and 12 VDC (nominal)
- Patented Single-coil Brushless 8 holes DC Motor Design
- Locked rotor protection
- Low power consumption
- Lubricated sintered sleeve bearing system or precision ball bearing system
- 26 AWG UL rating leadwire "+ red and "- black
- UL, CUR & TUV approval

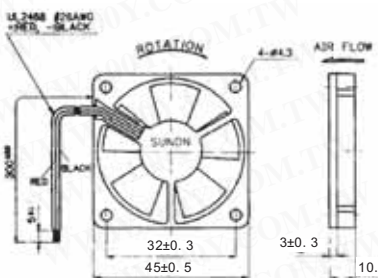

Unit: mm

Part No.	Product No.	Manufacturer	Description	Size(mm)	Volt.	r.p.m	Watts	Air Flow(CFM)	Noise (dBA)	Ball/Sleeve
1784	KD1245PFS1-H	SUNON	"SUNON" DC Axial Fan	45*45*10mm	12Vdc	6600	1.4W	8.8	31.4	Sleeve

