




DC Axial Fan


Detailed product specifications are available on: us.100y.com.tw



- Rating voltage: 5
- Power current: 0.27
- Power consumption: 1.4
- Speed: 5200
- Air flow: 13.0
- Static pressure: 0.14
- Noise: 30
- Weight: 21



Part No.	Product No.	Manufacturer	Description	Size(mm)	Volt.	r.p.m	Current(A)	Watts	Air Flow(CFM)	Noise (dBA)	Ball/Sleeve
39681	KDE0505PFV1.11.MS.A.GN	SUNON	"SUNON" DC Axial Fan	50*50*10	5V	5200	0.27A	1.4	13.0	30	VAPO




- Rating voltage: 12
- Power current: 0.08
- Power consumption: 1.0
- Speed: 5800
- Air flow: 7.0
- Static pressure: 0.13
- Noise: 27
- Weight: 17



Part No.	Product No.	Manufacturer	Description	Size(mm)	Volt.	r.p.m	Current(A)	Watts	Air Flow(CFM)	Noise (dBA)	Ball/Sleeve
39598	KDE1204PFV2.11.MS.A.GN	SUNON	"SUNON" DC Axial Fan	40*40*10	12V	5800	0.08A	1.0	7.0	27	VAPO



- Rated voltage: 12VDC
- Operating voltage range: 6~13.8VDC
- Starting voltage: 6 VDC (25deg. C power on/off)
- Rated speed: 3300 RPM±15%
- Air delivery: 27 CFM
- Static pressure: 0.11 Inch-H₂O
- Rated current: 0.16AMP
- Rated power: 1.9 watts
- Noise level: 31.5dB (A)
- Dielection of rotation: counter-clockwise viewed from front of fan blade
- Operating temperature: -10 to +70°C
- Storage temperature: -40°C to +70°C
- Bearing system: vapo bearing system
- Weight: 50g
- Safety: UL/CUR/TUV/CE approvals



Part No.	Product No.	Manufacturer	Description	Size(mm)	Volt.	Current(A)	Watts	Ball/Sleeve
42834	KDE1207PHV1.MS.AF.GN	SUNON	"SUNON" 12VDC Axial Fan	70x70x15 mm	12V	0.16A	1.9W	VAPO



- Rating voltage (VDC) :24
- Power current (AMP) :0.17
- Power consumption (WATTS) :4.1
- Speed (RPM) :2800
- Air flow (CFM) :80.0
- Static pressure (Inch-H₂O) :0.22
- Noise (dBA) :41
- Weight (g) :200

Part No.	Product No.	Description	Size(mm)	Volt.	r.p.m	Current(A)	Watts	Air Flow(CFM)	Noise (dBA)	Ball/Sleeve
22119	MCKDE2412PTB2-6A	DC Axial Fan	120*120*25mm	24V	2800	0.17A	4.8W	80	11	BALL

AC Axial Fan


Detailed product specifications are available on: us.100y.com.tw



FEATURES

- Fram/Housing: aluminum die-casting
- Impeller: plastic 94V-0
- Bearing: ball bearing or sleeve bearing
- Connects: lead wire or terminal type
- Protection: Impedance protected to prevent coil from burning
- Insulation resistance: 100M ohm min. at 500VDC (between lead wire (+) and frame)
- Operating temperature: -10°C to +70°C
- Life expectancy: ball bearing: 50,000hr (at ordinary temperature and humidity)
Sleeve bearing: 20,000hr, (at ordinary temperature and humidity)

DIMENSIONS: 120X120X38.5 (mm)




PERFORMANCE CURVE:

Part No.	Product No.	Description	Air Flow(CFM)	Size(mm)	Current(A)	Watts	Noise (dBA)	Volt.	r.p.m	Ball/Sleeve
1793	DF1A12SH	AC110V Axial Fan	92/106	120*120*38.5mm	0.21/0.19	17/15 80/90 degree	43/45	110/120	2700/3100	Sleeve
5013	DF2A12SH	AC Axial Fan	92/106	120*120*38.5mm	0.10/0.09	17/15	43/45	220/230V	2700/3100	Sleeve



FEATURES

- Fram/Housing: aluminum die-casting
- Impeller: plastic 94V-0
- Bearing: ball bearing or sleeve bearing
- Connects: lead wire or terminal type
- Protection: Impedance protected to prevent coil from burning
- Insulation resistance: 100M ohm min. at 500VDC (between lead wire (+) and frame)
- Operating temperature: -10°C to +70°C
- Life expectancy: ball bearing: 50,000hr (at ordinary temperature and humidity)
Sleeve bearing: 20,000hr, (at ordinary temperature and humidity)

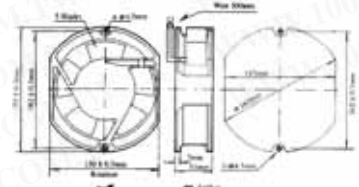

Part No.	Product No.	Manufacturer	Description	Air Flow(CFM)	Size(mm)	Current(A)	Watts	Noise (dBA)	Volt.	r.p.m	Ball/Sleeve
8736	DF1A17BA		AC Axial Fan	180/205	172*150*51mm	0.42/0.38	35/32	49/51	110/120V	2750/3100	2 Ball
1792	DF2A17BH	Dynaeon	AC Axial Fan	180/205	172*150*51mm	0.22/0.20	35/32 High Temperature 80/100	49/51	220/230V	2750/3100	Ball

