




FIRE & SECURITY & CCTV

CCD Camera


Detailed product specifications are available on: us.100y.com.tw



SPECIFICATIONS

- Image pick-up device: 1/3" CCD image sensor (Inter line)
- Picture element: 512 (H) x 492 (V), NTSC/EIA 512 (H) x 582 (V) PAL/CCIR
- Resolution: 380 Horizontal TV lines 290000 pixels (CCIR)
- Min illumination: 0 Lux
- Illumination source: 6 IR LEDs on board
- Horiz. Sync. Frequency: NTSC/EIA 15, 734KHz, CCIR/PAL 15, 625KHz
- Vertical frequency: 60Hz CCIR PAL 50Hz
- Clock frequency: NTSC 19.0699 MHz, PAL 18, .9375MHz
- Scanning system: Interlace 2:1
- S/N Ratio: more than 46dB
- Electronic shutter: 1/100, 000sec. (Linear)
- Lens: 3.6mm, f2.0
- Video O/P: 1Vp-p, 75Ohms
- Audio O/P: 2V p-p
- Gamma: 0.45

- Storage temperature: -30 to 60°C
- Operating temperature: -10 to 45°C

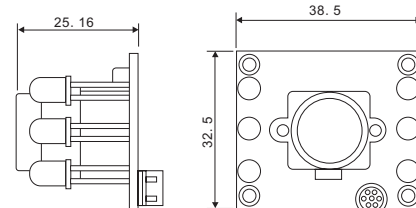

Unit: mm

Part No.	Product No.	Description
2806	15-BB26LA-1	CCD Camera (With Audio In / Night Visible)



SPECIFICATIONS

- Image pick-up device: 1/3" CCD image sensor (Inter line)
- Picture element (Medium): NTSC/EIA: 512*492, PAL/CCIR 512*582
- Picture element (High): NTSC/EIA: 771*492, PAL/CCIR 753*582
- H. Sync Frequency: NTSC/EIA: 15.734KHz, PAL/CCIR: 15.625KHz
- V. Sync Frequency: NTSC/EIA: 59.94Hz, PAL/CCIR: 50Hz
- Synchronization: Internal/DC type, Line-lock/AC type (option)
- Back light compensation: ON/OFF Switchable
- Electronic shutter: ON/OFF Switchable, rang: 1/50 (1/60) ~ 1/100, 000sec
- Auto gain control: ON/OFF Switchable
- Lens: CS Mount
- Gamma correction: 0.45

- S/N Ratio: more than 48dB
- Video output: 1vp-p, 75ohms
- Dimension W*H*D mm: 97*60*60
- Power supply: 12VDC, 24/110/230VAC
- Storage temperature: -30 to 60°C
- Operating temperature: -10 to 45°C

FEATURES

- Auto white balance,
- Auto back light compensation
- Line lock available 0.2 lux without IR
- Night vision available for color camera

Part No.	Product No.	Description
16531	HTC-55G/NV	1/3" High Quality Color CCD Camera



- Image pick-up element: 1/3" Inter line transfer CCD image sensor
- Signal output: 1Up-p 75Ω (unbalanced)
- Gamma: 0.45 or 1
- Electrical source voltage: DC+12V +/- 10%
- Current consumption: 190mA

- Reserve temperature: -30°C~70°C
- Operating temperature: -10°C to 45°C
- Pimention: 64.5 (L) * 43.5 (W) * 44 (H) mm
- Weight: 160g

Part No.	Product No.	Manufacturer	Description
21820	ITWC-231S	Motic	Color video camera



SPECIFICATIONS

- Image pick-up device: 1/3" CCD image sensor (Inter line)
- Picture element: 510 (H) x 492 (V)
- Min illumination: 0.2 Lux F 1.2
- Electron shutter: 1/60-1/120, 000sec
- Video O/P: 1Vp-p, 75Ohms

- Gamma: 0.45
- Operating temperature: -10°C to +50°C
- Operating humidity: 85% RH
- Power supply: DC 12V/200mA
- Dimension W*H*L mm: 46*40*102

Part No.	Product No.	Description
13322	KMS-1064KCS	1/3" B/W CCD Camera Kits



SPECIFICATIONS

- Image pick-up device: 1/3" CCD image sensor (Inter line)
- Picture element: 542 (H) x 492 (V)
- Min illumination: 0.2 Lux F 2.0
- Electron shutter: 1/60-1/100, 000sec
- Video O/P: 1Vp-p

- Operating humidity: 85% RH
- Power supply: DC 12V±10% 1.2W
- Dimension mm: 88 (Φ) x 60 (H)
- Weight: 100g
- Operating temperature: -20°C to +55°C

Part No.	Product No.	Description
12530	KMS-1070CS	1/3" High Quality B/W CCD Camera



SPECIFICATIONS

- Image pick-up device: 1/3" CCD image sensor (Inter line)
- Picture element: 537 (H) x 505 (V)
- Min illumination: 0.2 Lux F 1.2 5600°K
- Electron shutter: 1/60-1/120, 000sec
- Video O/P: 1Vp-p, 75Ohms

- Gamma: 0.45
- Operating temperature: -20°C to +50°C
- Operating humidity: 85% RH
- Power supply: DC 12V±1V / 90mA
- Dimension mm: 58 (Φ) x 58 (H)

Part No.	Product No.	Description
13459	KMS-1242AXCS	1/4" Color High Quality CCD Camera

