




FIRE & SECURITY & CCTV

Audio/Video Selector

Detailed product specifications are available on: us.100y.com.tw

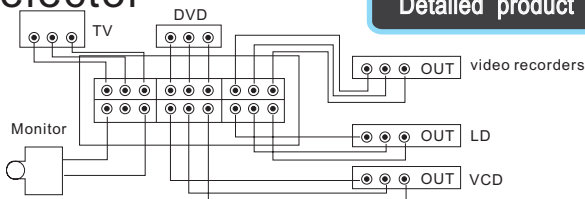

Yellow : video
Red, white : sound

Part No.	Product No.	Description
10507	1793	AV Audio/Video Selector



- Dimension : 126. 5x97. 6x28. 7mm
- Application : TV, VCD/DVD/LD, family cinema, cinematograph, Monitor etc
- Easy use, convenience

Part No.	Product No.	Manufacturer	Description
12752	2K1111317	LEAP	Audio/Video Selector



PHYSICAL

- Size: IMU 8. 9cmx8. 5cm high
PCS 19" rack mount, 2. 5U 33. 5cmx48. 3cmx11. 1cm
- Weight: IMU 0. 7kg
PCS 7. 7kg
- Power PCS 28VDC 100W (max) (PCS supplies IMU)
- Temp. Range: IMU -54 deg C to +85 deg C
PCS 0 deg C to +60 deg C
- Humidity: PCS 5 to 95% RH non-condensing

Part No.	Product No.	Description
7448	AV-410	AV Manual Audio/Video Selector

CATV Splitter

Detailed product specifications are available on: us.100y.com.tw



MODEL	FREQUENCY RANGE (MHz)	INSERTION LOSS (dB)	ISOLATION (dB)	RETURN LOSS IN/OUT	DIMENSION (mm)	WEIGHT (g)
2242	5-47	≤3. 7	≥2. 0	26/20dB at 40MHz -1. 5dB/OCT	53x47x26	55
	48-470	≤3. 7				
	471-862	≤4. 0	≥18. 5			
2243	5-47	≤6	≥16	23/20dB at 40MHz -1. 5dB/OCT	74x47x26	75
	48-470	≤5. 6	≥18. 5			
	471-862	≤6. 1	≥17			

Part No.	Product No.	Description	MHz
3545	2242	1-2 High Quality Splitter	5-860MHz
3546	2243	1-3 High Quality Splitter	5-860MHz



MODEL	FREQUENCY RANGE (MHz)	INSERTION LOSS (dB)	ISOLATION (dB)	RETURN LOSS (dB)	DIMENSION (mm)	WEIGHT (g)
2244	5-47	≤7. 5	≥20. 0	26dB at 40MHz -1. 5dB/OCT	73x48x25	80
	48-470	≤7. 5	≥18. 5			
	471-862	≤8. 0	≥17. 0			

Part No.	Product No.	Description	MHz
14699	2244	4-WAY SPLITTER	5-862MHz



MODEL	FREQUENCY RANGE (MHz)	INSERTION LOSS (dB)	ISOLATION (dB)	RETURN LOSS (dB)	DIMENSION (mm)	WEIGHT (g)
STF-H2246P	5-40	12. 5	20	3	120x60x24	152
	40-1000	12. 5	20	10		
	1000-1750	15	17	8		
	1750-2050	16	16	8		
Power pass To all ports	2050-2300	18	12	7		

Part No.	Product No.	Description	MHz
14700	2246	6 Ways Splitters	5-862MHz



MODEL	FREQUENCY RANGE (MHz)	INSERTION LOSS (dB)	ISOLATION (dB)	RETURN LOSS IN/OUT	DIMENSION (mm)	WEIGHT (g)
2244	5-47	≤7. 5	≥20. 0	20dB at 40MHz -1. 5dB/OCT	73*48*25	80
	48-470	≤7. 5	≥18. 5			
	471-862	≤8. 0	≥17. 0			
2246	5-470	≤11. 0	≥20. 0	20dB at 40MHz -1. 5dB/OCT	123*60*37	270
	471-862	≤11. 5	≥17. 0			
2248	5-470	≤12. 0	—	20dB at 40MHz -1. 5dB/OCT	123*60*37	280
	471-862	≤12. 5	≥18			

Part No.	Product No.	Description	MHz
14701	2248	8-WAY SPLITTER	5-862MHz

