



## Conquer\_EAF/UAF/AUE/JUE/AUB Series Fuses



- 10. 3Φx38. 1mm (13/32x1-1/2 inch)
- Ampere rating: 500mA to 80A
- Voltage rating: 600V and less

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)

- Electrical characteristics  
135%-1hour, maximum  
200%-120 seconds, maximum
- Caps: gold finish for high performance
- Standards: UL Listed , CSA certified 30A and less



Part No.	Product No.	Manufacturer	Description	Current Rating	Work Volt.	Size
14221	AUB-5A	Conquer	Fast Acting Ceramic Fuse	5A	600V	10.3*38.1mm

## Conquer\_SEF(U) SMF Series Fuses



### INTERRUPTING RATINGS

50 amperes or 10xrated current, whichever is greater at 125V AC/DC

### ENVIRONMENTAL SPECIFICATION

**Operating temperature:** -55°C to +125°C

**Shock:** MIL-STD-202, Method 213 Test condition 1 (100G's peak for 6 milliseconds)

**Vibration:** MIL-STD-202, Method 201 (10-55Hz, 0.06 inch. total excursion)

**Salt spray:** MIL-STD-202, Method 101, test condition B (48Hrs)

**Insulation resistance:** MIL-STD-202, Method 302, test condition A (after opening) 10,000 ohms minimum

**Resistance to solder heat:** MIL-STD-202, Method 210, test condition F (20sec, at 260°C)

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)




### PHYSICAL SPECIFICATION

**Materials** Body: ceramic

Terminations: silver plated brass caps

**Packaging:** 1,000 Fuses in 7 inches dia. reel, or 5,000 fuses in 13 inches dia. White color reel, 12mm wide tape, per EIA Standard 481

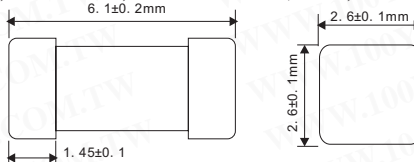

Part No.	Product No.	Manufacturer	Description	Current (A)	Working Volt.	IR (A)	Size
40690	SEF(U)-1.25A	Conquer	SEF(U)-Fast Acting Square Ceramic Surface Mount Fuses	1.25A	125V	50A/125V	2.6*6.2mm
40689	SEF(U)-1A	Conquer	SEF(U)-Fast Acting Square Ceramic Surface Mount Fuses	1A	125V	50A/125V	2.6*6.2mm


## SIEMENS Fuse SIEMENS\_5SE2 Series Fuse

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



### SIEMENS FUSE

Part No.	Product No.	Manufacturer	Description	Current (A)	Working Volt.	IR	Size
41523	5SE2202	SIEMENS	SIEMENS FUSE	2A			D01
43089	5SE2204	SIEMENS	SIEMENS FUSE	4A	250Vdc/400Vac	30KA	D01
38908	5SE2206	SIEMENS	SIEMENS FUSE	6A	250Vdc/400Vac	30kA	D01
43090	5SE2210	SIEMENS	SIEMENS FUSE	10A	400V		D01
42879	5SE2216	SIEMENS	SIEMENS FUSE	16A	400V		D01



Size	Dimensions		
	A	d	h
D01	2-16	11	36
D02	20-63	15.3	36
D03	80-100	22.5	43



Part No.	Product No.	Manufacturer	Description	Current (A)	Working Volt.	Size
20086	5SE2220	SIEMENS	SIEMENS FUSE	20A	380-250V	D02



### SIEMENS FUSE

Part No.	Product No.	Manufacturer	Description	Current (A)	Working Volt.	IR	Size
43091	5SE2225	SIEMENS	SIEMENS FUSE	25A	400V	30KA	D02
40500	5SE2235	SIEMENS	SIEMENS FUSE	35A	400V		D02
36579	5SE2250	SIEMENS	SIEMENS FUSE	50A	400VAC/250VDC		D02
42711	5SE2263	SIEMENS	SIEMENS FUSE	63A	400V		D02



## SIEMENS\_3NA Series Fuse

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



PS\*: 9 units

weight per PU approx: 0.133 kg



Part No.	Product No.	Manufacturer	Description	Current (A)	Working Volt.
34731	3NA3 810	SIEMENS	SIEMENS LV HRC FUSE	25A	500V
34732	3NA3 830	SIEMENS	SIEMENS LV HRC FUSE	100A	500V

