



DEMEX_gG Series Fuses

Detailed product specifications are available on: us.100y.com.tw



R024 NDZ TYPE



Part No.	Product No.	Manufacturer	Description	Current (A)	Working Volt.	Size
41396	RO24 6A/500V	DEMEX	R024 NDZ TYPE	6A	500V	RO24
41397	RO24 20A/500V	DEMEX	R024 NDZ TYPE	20A	500V	RO24

RO24 6A/500V

RO24 20A/500V

Fuseholder Panel Mounting Fuseholders

Detailed product specifications are available on: us.100y.com.tw





IP 30mm fuse
10A 250V

Part No.	Product No.	Description	Size	Cap Type
4738	0829	Fuse Holder 10A	1P	Ship Style





Rating: 10A (UL/CSA/UDE) 6.3A (SEMKO)
Matching fuse: $\Phi 5.2 \times 20$

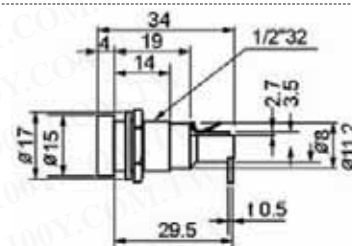

Part No.	Product No.	Description
17726	63-112043	? Type Fuse Holder




- Rated current: 15A 250V
- Insulation resistance at 500VDC: 100M Ω Min
- Contact resistance: 5m Ω at 1A DC
- Dielectric strength for 60 sec: AC1500V Min
- Approvals: RU, CSA

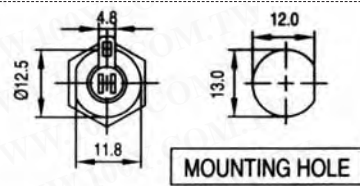

Part No.	Product No.	Manufacturer	Description	Size	Cap Type
16177	CQ-207D	Conquer	15A/250V UL/CSA Fuse Holder	$\Phi 6.4 \times 30$	Screw Cap




- Rated current: 20A
- Insulation resistance at 500VDC: 100M Ω Min
- Contact resistance: 5m Ω at 1A DC
- Dielectric strength for 60 sec: AC 1500V Min
- Body material: ABS
- Supply standard UL Wire-AWG/Length: 14#AWG/8" Loop

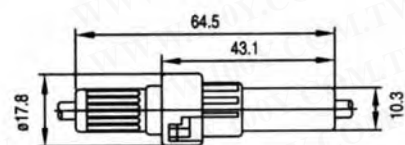

Part No.	Product No.	Manufacturer	Description	Size	Cap Type
15571	CQ-209B	Conquer	IN-LINE FUSEHOLDER BAYONET TYPE Fuse Holder	6.3*30 mm	40A




- Rated current: 20A
- Insulation resistance at 500VDC: 100M Ω Min
- Contact resistance: 5m Ω at 1A DC
- Dielectric strength for 60 sec: AC 2000V Min
- Body material: Bakelite
- Supply standard UL Wire-AWG/Length: 12#AWG/8" Loop

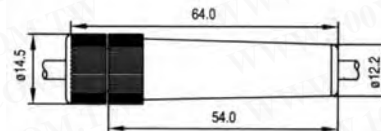

Part No.	Product No.	Manufacturer	Description	Size	Cap Type
16979	CQ-210	Conquer	In-Line Fuse Holder For 1/4**1-1/4 Fuses Holder	6.3*30	20A
17220	CQ-210	Conquer	In-Line Fuse Holder For 1/4**1-1/4 Fuses Holder	6.3*30	20A



- Rated current: 30A 250V
- Insulation resistance at 500VDC: 100M Ω Min
- Contact resistance: 5m Ω at 1A DC
- Dielectric strength for 60 sec: AC 3000V Min
- Approvals: RU, CSA

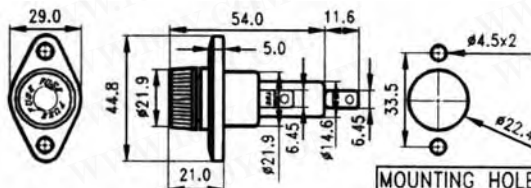

Part No.	Product No.	Manufacturer	Description	Size	Cap Type
17222	CQ-215	Conquer	SPECIAL FUSE HOLDER	10.3*38.1	30A

