



Panel Mounting Fuseholders

Detailed product specifications are available on: us.100y.com.tw




- Rated current: 10A
- Insulation resistance at 500VDC: 100MΩMin
- Contact resistance: 5mΩ at 1A DC
- Dielectric strength for 60 sec: AC1500V Min

- Body material: nylon 94V0
- Supply standard UL Wire-AWG/Length: 18#AWG/8"Loop


| Part No. | Product No. | Manufacturer | Description | Size | Cap Type |
|----------|-------------|--------------|----------------------------------|----------|----------|
| 19031 | CQ-219N | Conquer | In-Line Fuse Holder Bayonet Type | 46*4.7mm | 10A |



- Rated current: 30A 250V
- Insulation resistance at 500VDC: 100MΩMin
- Contact resistance: 5mΩ at 1A DC
- Dielectric strength for 60 sec: AC3000V Min
- Terminal option: quick terminal

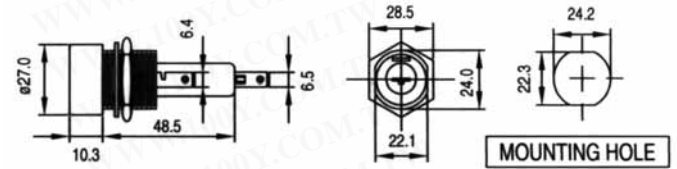

| Part No. | Product No. | Manufacturer | Description | Size | Cap Type |
|----------|-------------|--------------|---------------------|-----------|----------|
| 17223 | CQ-225 | Conquer | SPECIAL FUSE HOLDER | 10.3*38.1 | 30A |




| (mm) | A | B | C | D | E | F | G | H | I | M |
|-------|-----|----|----|----|----|----|----|------|----|------|
| CT-01 | 50 | 15 | 29 | 18 | 15 | 9 | 38 | 4.00 | 3 | 3.50 |
| CT-02 | 76 | 15 | 29 | 40 | 15 | 9 | 64 | 4.00 | 3 | 3.50 |
| CT-03 | 58 | 26 | 39 | 16 | 15 | 20 | 42 | 4.00 | 14 | 60 |
| CT-04 | 80 | 26 | 39 | 34 | 15 | 20 | 64 | 4.00 | 14 | 60 |
| CT-05 | 98 | 42 | 51 | 34 | 20 | 32 | 71 | 4.00 | 26 | 80 |
| CT-06 | 86 | 40 | 71 | 26 | 20 | 27 | 60 | 4.00 | 24 | 100 |
| CT-07 | 115 | 40 | 71 | 49 | 21 | 27 | 85 | 4.00 | 24 | 100 |

Fuse Holder

| Part No. | Product No. | Description |
|----------|-------------|-------------|
| 12287 | CT-04 | Fuse Holder |




- FEATURES**
- Material: housing: phenolic
 - Contact: nickel plated brass
 - Snap-in mounting, easy to install receptacle to panel
 - Fit flat plug

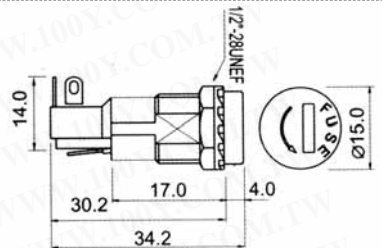

| Part No. | Product No. | Manufacturer | Description | Size | Cap Type |
|----------|-------------|--------------|-----------------------------|-------------|-----------|
| 6672 | R3-11 | SCI | 10A/250V UL/CSA Fuse Holder | 5.2 ϕ *20mm | Screw Cap |




- FEATURES**
- Material: frame and cap: phenolic (UL flame: 94V-2)
 - Terminal: nickel plated brass
 - Mounted by nut



| Part No. | Product No. | Manufacturer | Description | Size | Cap Type |
|----------|-------------|--------------|-----------------------------|---------------|-----------|
| 4236 | R3-12-ASS | SCI | 10A 250V UL/CSA Fuse Holder | 5 ϕ *20±0.5mm | Screw Cap |




- FEATURES**
- Material: frame and cap: phenolic (UL flame: 94V-1)
 - Terminal: nickel plated brass
 - Mounted by nut



| Part No. | Product No. | Manufacturer | Description | Size | Cap Type |
|----------|-------------|--------------|--------------------------------|----------------|-----------|
| 3470 | R3-13-ASS | SCI | 10A 250V AC UL/CSA Fuse Holder | 6.3 ϕ *30 ±1mm | Screw Cap |




- FEATURES**
- Material: Flame: phenolic (UL flame: 94V-1)
 - Cap: nylon (UL flame: 94V-2)
 - Terminal: nickel plated brass
 - Mounted by nut



| Part No. | Product No. | Manufacturer | Description | Size | Cap Type |
|----------|-------------|--------------|--------------------------------|----------------|--------------|
| 14324 | R3-21A-SO | SCI | 10A/250V AC UL/CSA Fuse Holder | 6.4 ϕ *30 ±1mm | Bayonet type |



- FEATURES**
- Material: frame and cap: phenolic (UL flame: 94V-1)
 - Terminal: nickel plated brass
 - Mounted by nut



| Part No. | Product No. | Manufacturer | Description | Size | Cap Type |
|----------|-------------|--------------|-----------------------------|----------|-----------|
| 11214 | R3-22A | SCI | 10A/250V UL/CSA Fuse Holder | ϕ 6.4*30 | Screw Cap |

