



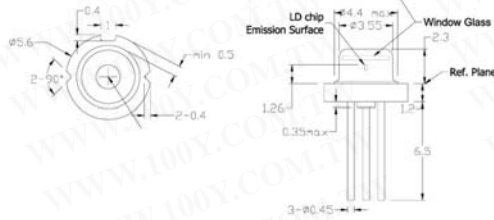

OPTOELECTRONICS & INDICATORS

Laser Diode Modules Laser LED



Detailed product specifications are available on: us.100y.com.tw

FEATURES

- High visibility (634nm)
- High assembly accuracy
- High reliability

APPLICATIONS

- Industrial laser markers
- Measuring instruments
- Class I, eye-safe laser pointer

Part No.	Product No.	Manufacturer	Description	Po (mW)	λP(nm)	θ//θ? (deg)	I _m (uA)	Package	Working temperature (°C)	Working Current_top(mA)
29177	ADL-63052TL	Arima Opto	Laser LED	5mW	635nm	7.5/33	0.1mA	TO-18	-10~40°C	32mA
29179	ADL-63071TL	Arima Opto	Laser LED	7mW	635nm	7.5/33	0.15mA	TO-18	-10~40°C	50mA
29178	ADX-6305STL	Arima Opto	Laser LED	5mW	635nm	7.5/33	0.1mA	TO-18	-10~40°C	33mA
27364	EL65-18-A	EVERLIGHT	Laser LED	5mW	650nm	8//35deg	300uA	TO-18	-10-40	25mA
29049	ELD65A5-1	Arima Opto	Elaser_Laser LED	5mW	650nm	8/38	100uA	TO-18	-10~50°C	20mA
39073	HLDH-650-A-10-01	Haw Shuenn	Laser LED	10mW	650nm	9/28		TO-18	-10~50°C	26mA
39074	HLDH-660-A-20-01	Haw Shuenn	Laser LED	20mW	650nm	8/16		TO-18	-10~60°C	80
30619	LD-650-5mW-A-90-260uA		Laser LED	5mW	650nm	7/38	90-260uA	TO-18	-10~40°C	35mA

Optical Switches Photo IC Sensors



- Light source: red LED
- Degree of protection: IP65
- Fiber size: M3 screw
- Optical fiber unit length: 50cm/100cm/200cm
- Housing material: plastic

- Current consumption: <40mA max.
- Indicator: light indicator (red)
- Ambient operating temperature: operating: -25° to 55°C
- Weight: amplifier unit: approx 99g, optical fiber unit: 20g

Detailed product specifications are available on: us.100y.com.tw

Part No.	Product No.	Description	Sensing distance	Least project	Voltage supply	Output	LED
14784	24YJ-HN-FR+H-SP-05A	Optical Fiber Photo Sensor	100cm	Opaque (0.5mm dia.)	10~30Vdc	NPN DARK/LIGHT	RED LED



Photomicrosensor With Built-In Amplifier, Used With Standard Optical Fiber

Part No.	Product No.	Description	Sensing distance	Least project
14703	E32-DC200	Photomicrosensor With Built-In Amplifier, Used With Standard Optical Fiber	150mm	Φ0.012mm




- Cable: 2m 4 conductor cable (1H and 1U types are shielded)
- Input power: 12~24VDC±10%
- Current Consumption: 50mA
- Protection Class: IP65 (Except FFR2 series)
- Shipping Weight: 290g

Part No.	Product No.	Description	Sensing distance	Voltage supply	LED
12279	FFR-1HE	Miniature Amplifier Built-In Type Photo Sensor	Thru-Beam:60mm, Reflective:25mm	12~24Vdc	Red 660nm

Photoelectric Switch - Amplifier Unit

Detailed product specifications are available on: us.100y.com.tw

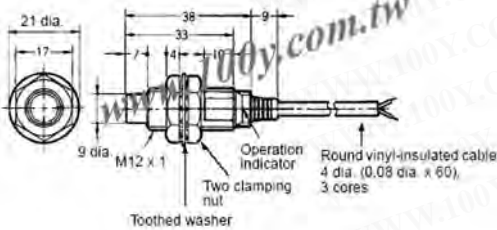

New series of TL-X2C1-GE models with improved performance over the previous TL-X-E models. Also, in addition to the E2EG, the new series of E2E/E2E2 models are available. Ideal for a variety of applications.

With a metal connector that can be tightened securely and accord protector.

With an easy-to-see yellow indicator, deeper mounting holes, and tightening flats for wrenches.

The new series of E2EG models includes M8 plug-in connector models.

Part No.	Product No.	Manufacturer	Description	Detection Volt.	Working voltage	LED
41455	E2EG-X5MC1	OMRON	Cylindrical Proximity Sensor	1,000 VAC for 1 min	12 to 24 VDC	yellow LED

- We provide a wide range of products to development and maintenance engineers in all type of business
- If you cannot find the components you want on the catalogue, please call us.

Taiwan: 886-3-5753170
Shanghai: 021-54151736 Shenzhen: 0755-83298787

Centenary Materials
Waiting for your phone call



T E L : Taiwan: 886-3-5753170
F A X : Taiwan: 886-3-5753172
E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
Shenzhen: 86-755-83640655
Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
Shanghai: 86-21-64605107
Shanghai: 100y-1@163.com