



Power Supplies & UPS


5-40W Single Output Switching Power Supply

Detailed product specifications are available on: us.100y.com.tw



FEATURES

- Universal AC input / Full range
- Protections: Short circuit/Over load/Over voltage
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- All using 105°C long life electrolytic capacitors
- Withstand 300VAC surge input for 5 second
- High operating temperature up to 70°C
- Withstand 5G vibration test
- High efficiency, long life and high reliability
- 3 years warranty long

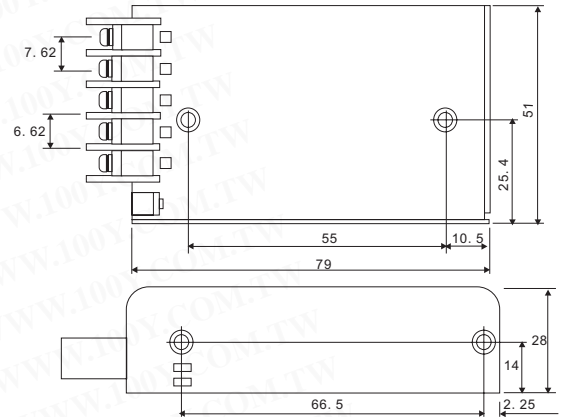


Part No.	Product No.	Manufacturer	Description	Output Volt.	Output Current	Tol.(±)
29516	RS-25-12	MEAN WELL	MEAN WELL_25W Single Output Switching Power Supply	12V	0~2.1A	±1%
29517	RS-25-15	MEAN WELL	MEAN WELL_25W Single Output Switching Power Supply	15V	0~1.7A	±1%
29518	RS-25-24	MEAN WELL	MEAN WELL_25W Single Output Switching Power Supply	24V	0~1.1A	±1%
29513	RS-25-3.3	MEAN WELL	MEAN WELL_25W Single Output Switching Power Supply	3.3V	0~6A	±3%
29520	RS-25-48	MEAN WELL	MEAN WELL_25W Single Output Switching Power Supply	48V	0~0.57A	±1%
29515	RS-25-5	MEAN WELL	MEAN WELL_25W Single Output Switching Power Supply	5V	0~5A	±2%



FEATURES

- Universal AC input / Full range
- Protections: Short circuit/Over load/Over voltage
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- High reliability

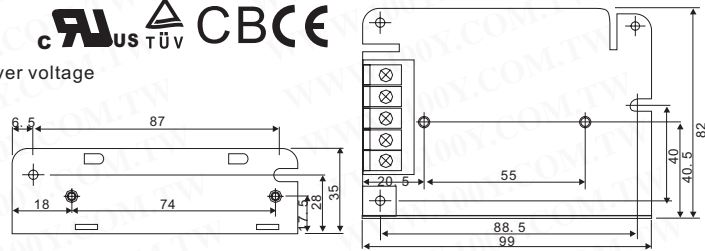

Part No.	Product No.	Manufacturer	Description	Output Volt.	Output Current	Tol.(±)
29638	RS-35-12	MEAN WELL	MEAN WELL_35W Single Output Output Switching Power	12V	0~3A	±1%
29466	RS-35-15	MEAN WELL	MEAN WELL_35W Single Output Output Switching Power Supply	15V	0~2.4A	±1%
29642	RS-35-24	MEAN WELL	MEAN WELL_35W Single Output Output Switching Power	24V	0~1.5A	±1%
29632	RS-35-3.3	MEAN WELL	MEAN WELL_35W Single Output Output Switching Power Supply	3.3V	0~7A	±3%
29644	RS-35-48	MEAN WELL	MEAN WELL_35W Single Output Output Switching Power	48V	0~0.8A	±1%
29634	RS-35-5	MEAN WELL	EAN WELL_35W Single Output Output Switching Power Supply	5V	0~7A	±2%



- AC input range selectable by switch
- Protections: short circuit/over load
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- 1 year warranty



AC input voltage range: 85~132VAC/170~264VAC selectable by switch
 AC inrush current: cold start, 15A at 115VAC, 30A at 230VAC
 DC adjustment range: ±10% of rated output voltage
 Over load protection: 105%~150% fold back current limiting, auto-recovery
 Setup, rise, hold up time: 200ms, 100ms, 30ms at full load and 230VAC
 Withstand voltage: I/P-O/P: 1.5KVAC, I/P-FG: 1.5KVAC for 1 minute
 Working temperature: 0~50°C@100%, -10°C@80%, 60°C@60% load
 Safety standards: design refer to UL 1012
 EMC standards: design refer to FCC part 15J
 Connection: 5P/9.5mm pitch terminal block
 Weight/Packing: 0.31kg; 45pcs/15.0kg/0.9CUFT

Part No.	Product No.	Manufacturer	Description	Output Volt.	Output Current	Tol.(±)
7528	S-15-12	MEAN WELL	15W Single Output Switching Power Supply	12VDC	1.3A	+/-1%
7527	S-15-24	MEAN WELL	15W Single Output Switching Power Supply	24VDC	0.7A	+/-1%
7529	S-15-5	MEAN WELL	15W Single Output Switching Power Supply	5VDC	3A	+/-2%

- We provide a wide range of products to development and maintenance engineers in all type of business
- If you cannot find the components you want on the catalogue, please call us.



Taiwan: 886-3-5753170
 Shanghai: 021-54151736 Shenzhen: 0755-83298787

Centenary Materials

Waiting for your phone call



T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai: 100y-1@163.com