




Power Supplies & UPS

45-65W Single Output Switching Power Supply

Detailed product specifications are available on: us.100y.com.tw

Part No.	Product No.	Manufacturer	Description	Output Volt.	Output Current	Tol.(±)
21117	PS-45-13.5	MEAN WELL	MEAN WELL_45W Single Outputs Switching Power Supply	13.5V	3.3A	±2%
21118	PS-45-15	MEAN WELL	MEAN WELL_45W Single Outputs Switching Power Supply	15V	3A	±2%
13393	PS-45-24	MEAN WELL	MEAN WELL_45W Single Outputs Switching Power Supply	24V	1.9A	±2%
21119	PS-45-27	MEAN WELL	MEAN WELL_45W Single Outputs Switching Power Supply	27V	1.7A	±2%
21112	PS-45-3.3	MEAN WELL	MEAN WELL_45W Single Outputs Switching Power Supply	3.3V	8A	±3%
21120	PS-45-48	MEAN WELL	MEAN WELL_45W Single Output Switching Power Supply	48V	1A	±2%
21113	PS-45-5	MEAN WELL	MEAN WELL_45W Single Outputs Switching Power Supply	5V	8A	±3%
21115	PS-45-7.5	MEAN WELL	MEAN WELL_45W Single Outputs Switching Power Supply	7.5V	5.4A	±3%

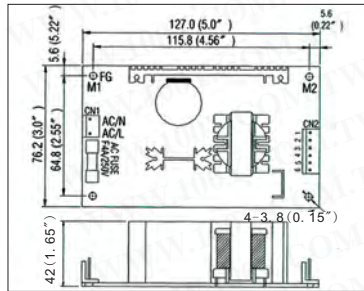

- Low cost, high reliability.
- Compact size, light weight
- 105°C output capacitor.
- 100% full load burn-in test.
- International ac input range.
- Built in emi filter, low ripple noise
- High efficiency, low working temperature.
- Soft-start circuit, limiting ac surge current.
- Short circuit, overload, over voltage protected


Input voltage range: 90~264VAC 47~440Hz; 120~370VDC
 AC Current: 1.5A/115V 0.9A/230V
 Inrush current: cold start 20A/115V 40A/230V
 Leakage current: <0.5mA/240VAC
 Over voltage protection: 115%~135%
 Temp. coefficient: ±0.04%/°C (0~50°C)
 Withstand voltage: I/P-O/P: 3KVAC I/P-FG: 1.5KVAC O/P-FG: 0.5KVAC
 Weight: 0.28Kgs
 Safety standards: UL 1950, TUV EN60950 APPROVED



Part No.	Product No.	Manufacturer	Description	Output Volt.	Output Current	Tol.(±)
12710	PS-65-12	MEAN WELL	MEAN WELL_65W Single Outputs Switching Power Supply	12V	5.2A	±2%
21128	PS-65-13.5	MEAN WELL	MEAN WELL_65W Single Outputs Switching Power Supply	13.5V	4.7A	±2%
21129	PS-65-15	MEAN WELL	MEAN WELL_65W Single Outputs Switching Power Supply	15V	4.2A	±2%
14458	PS-65-24	MEAN WELL	MEAN WELL_65W Single Output Switching Power Supply	24V	2.7A	±2%
21130	PS-65-27	MEAN WELL	MEAN WELL_65W Single Outputs Switching Power Supply	27V	2.4A	±2%
21124	PS-65-3.3	MEAN WELL	MEAN WELL_65W Single Outputs Switching Power Supply	3.3V	12A	±3%
21131	PS-65-48	MEAN WELL	MEAN WELL_65W Single Outputs Switching Power Supply	48V	1.35A	±2%
21125	PS-65-5	MEAN WELL	MEAN WELL_65W Single Outputs Switching Power Supply	5V	12A	±2%
21126	PS-65-7.5	MEAN WELL	MEAN WELL_65W Single Outputs Switching Power Supply	7.5V	8.0A	±2%



- FEATURES**
- 4"x2" miniature size
 - Universal AC input/Full range
 - Low leakage current<200uA
 - Protections:Short circuit/Over load/Over voltage
 - Cooling by free air convection
 - UL60601-1/IEC60601-1/EN60601-1 medical safety approved
 - No load power consumption<0.75W
 - Fixed switch frequency at

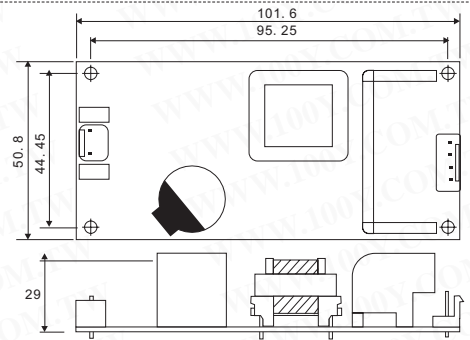

Part No.	Product No.	Manufacturer	Description	Output Volt.	Output Current	Tol.(±)
47318	RPS-60-5	MEAN WELL	60W Single Output Medical Type	5V	10A	±2%



- FEATURES**
- Universal AC input / Full range
 - Protections:Short circuit/Over load/Over voltage
 - Cooling by free air convection
 - LED indicator for power on
 - 100% full load burn-in test
 - All usina 105°C lona life electrolytic capacitors

Withstand 300VAC surge input for 5 second
 High operating temperature up to 70°C
 Withstand 5G vibration test
 High efficiency, long life and high reliability
 3 years warranty



Part No.	Product No.	Manufacturer	Description	Output Volt.	Output Current	Tol.(±)
29674	RS-50-12	MEAN WELL	MEAN WELL_50W Single Output Output Switching Power Supply	12V	0~4.2A	±1%
29676	RS-50-15	MEAN WELL	EAN WELL_50W Single Output Output Switching Power Supply	15V	0~3.4A	±1%
29678	RS-50-24	MEAN WELL	EAN WELL_50W Single Output Output Switching Power Supply	24V	0~2.2A	±1%
29044	RS-50-3.3	MEAN WELL	MEAN WELL_50W Single Output Output Switching Power Supply	3.3V	0~10A	±3%
29681	RS-50-48	MEAN WELL	MEAN WELL_50W Single Output Output Switching Power Supply	48V	0~1.1A	±1%
26474	RS-50-5	MEAN WELL	EAN WELL_50W Single Output Output Switching Power Supply	5V	0~10A	±3%



T E L : Taiwan : 886-3-5753170
 F A X : Taiwan : 886-3-5753172
 E-mail : Taiwan : us_sale@100y.com.tw

Shenzhen : 86-755-83298787
 Shenzhen : 86-755-83640655
 Shenzhen : 100y@163.com

Shanghai : 86-21-54151736
 Shanghai : 86-21-64605107
 Shanghai : 100y-1@163.com