



Power Supplies & UPS

DIN 30-960W Single Output Switching Power Supply

Detailed product specifications are available on: us.100y.com.tw



MEAN WELL_120W Single Output DIN Rail Power Supply


Part No.	Product No.	Manufacturer	Description	Output Volt.	Tol.(±)	Output Current
30623	DR-120-24	MEAN WELL	MEAN WELL_120W Single Output DIN Rail Power Supply	24V	±1%	0~5.0A
30624	DR-120-48	MEAN WELL	MEAN WELL_120W Single Output DIN Rail Power Supply	48V	±1%	0~2.5A



DR-30 Series

FEATURES:

- Universal AC input/Full range
- Protections: Short circuit/Over load/Over voltage
- Cooling by free air convection
- Can be installed on DINrail TS-35/7.5 or 15
- Isolation class II
- LED indicator for power on
- 100% full load burn-in test
- 3 year warranty

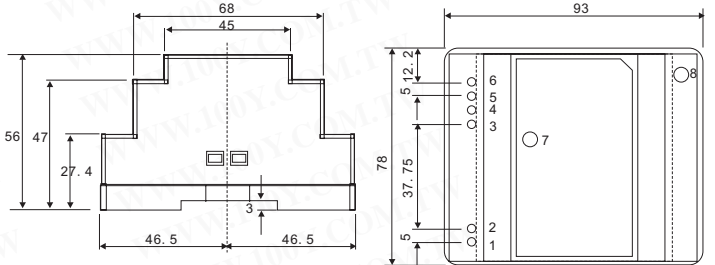

AC Current (Typ.) : 0.88A/115VAC 0.48A/230VAC
 Inrush current (Typ.) : Gold start 27A/115VAC 36A/230VAC
 Working temp. : -20~+60°C (Refer to output load derating curve)
 Safety standards: UL60950-1, TUV EN60950-1 Approved
 Design refer to EN50178
 Withstand voltage: I/P-O/P: 3KVAC



Pin No.	Assignment	Pin No.	Assignment
1	AC/N	5, 6	-V
2	AC/L	7	LED
3, 4	+V	8	+VADJ.

Part No.	Product No.	Manufacturer	Description	Output Volt.	Tol.(±)	Output Current
30800	DR-30-12	MEAN WELL	MEAN WELL_30W Single Output Class II DIN Rail Power	12V	±1%	0~2.0A
30801	DR-30-15	MEAN WELL	MEAN WELL_30W Single Output Class II DIN Rail Power	15V	±1%	0~2.0A
30804	DR-30-24	MEAN WELL	MEAN WELL_30W Single Output Class II DIN Rail Power	24V	±1%	0~1.5A
30793	DR-30-5	MEAN WELL	MEAN WELL_30W Single Output Class II DIN Rail Power	+5V	±2%	0~3.0A





FEATURES:

- Low cost, high reliability.
- Compact size, light weight
- 105°C output capacitor.
- 100% full load burn-in test.
- International AC input range.
- Built in EMI filter, low ripple noise
- High efficiency, low working temperature.
- Soft-start circuit, limiting AC surge current.
- Short circuit, overload, over voltage, over temp protected



Input voltage range: 85~264VAC 47~63Hz; 120~370VDC
 AC Current: 1.5A/115V 0.75A/230V
 Inrush current: Cold start 30A/115V 60A/230V
 Leakage current: <1mA/240VAC
 Temp. coefficient: ±0.03%/°C (0~50°C)
 Withstand voltage: I/P-O/P: 3KVAC I/P-FG: 1.5KVAC O/P-FG: 0.5KVAC
 Weight: 0.4Kgs
 Safety standards: TUV EN60950, UL508 Approved

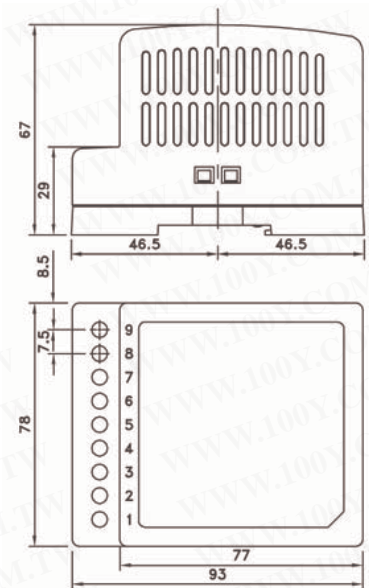

Part No.	Product No.	Manufacturer	Description	Output Volt.	Tol.(±)	Output Current
21093	DR-4505	MEAN WELL	45W Single Output DIN Rail Power Supply	5V	±2%	0~5A
21094	DR-4512	MEAN WELL	45W Single Output DIN Rail Power Supply	12V	+/-1%	0~3.5A
21095	DR-4515	MEAN WELL	45W Single Output DIN Rail Power Supply	15V	+/-1%	0~2.8A
19718	DR-4524	MEAN WELL	45W Single Output DIN Rail Power Supply	24V	+/-1%	0~2A

- We provide a wide range of products to development and maintenance engineers in all type of business
- If you cannot find the components you want on the catalogue, please call us.

Taiwan: 886-3-5753170
 Shanghai: 021-54151736 Shenzhen: 0755-83298787

Centenary Materials
 Waiting for your phone call



T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai: 100y-1@163.com