



Power Supplies & UPS

75W-150W Triple Output With PFC Function

Detailed product specifications are available on: us.100y.com.tw

Part No.	Product No.	Manufacturer	Description	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current
30434	TP-75A	MEAN WELL	MEAN WELL_75W Triple Output with PFC Function	±8%	-5V/0.0~0.6A	±4%	12V/0.2~4.0A	±3%	5V/1.5~10A
30442	TP-75B	MEAN WELL	MEAN WELL_75W Triple Output with PFC Function	±8%	-12V/0.0~0.6A	±4%	12V/0.2~4.0A	±3%	5V/1.5~10A
30443	TP-75C	MEAN WELL	MEAN WELL_75W Triple Output with PFC Function	±8%	-15V/0.0~0.6A	±4%	15V/0.2~3.0A	±3%	5V/1.5~10A
30444	TP-75D	MEAN WELL	MEAN WELL_75W Triple Output with PFC Function	±8%	12V/0.0~0.6A	±4%	24V/0.2~2.5A	±3%	5V/1.5~10A

100W-375W Quad Output With PFC Function

Detailed product specifications are available on: us.100y.com.tw



FEATURES:

- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- Protections: Short circuit/Over load/Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- Fixed switching frequency at PFC: 67KHz
PWM: 134KHz(Optional)
- 2years warranty

Voltage range: 90~264VAC 127~370VDC

AC CURRENT: 1. 65A/115VAC 0. 85A/ 230VAC



INRUSH CURRENT (max.): Cold start 40A

LEAKAGE CURRENT: <1mA/ 240VAC


WORKING TEMP.: -10 ~ +60°C(Refer to output load derating curve)

SAFETY STANDARDS: UL60950-1, TUV EN60950-1 Approved

WITHSTAND VOLTAGE: I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0. 5KVAC

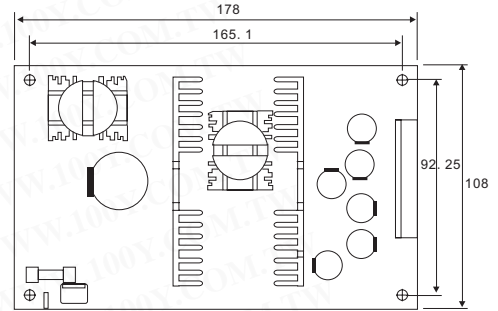

Part No.	Product No.	Manufacturer	Description	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current
31224	PPQ-1003A	MEAN WELL	MEAN WELL_100W Quad Output with PFC Function	±6%	-5V/0.0~1.0A	±6%	12V/0.2~3.0A	±3%	5V/2.0~15A	±3%	3.3V/0.0~15A
31226	PPQ-1003B	MEAN WELL	MEAN WELL_100W Quad Output with PFC Function	±6%	-12V/0.0~1.0A	±6%	12V/0.2~3.0A	±3%	5V/2.0~15A	±3%	3.3V/0.0~15A
31227	PPQ-1003C	MEAN WELL	MEAN WELL_100W Quad Output with PFC Function	±6%	-15V/0.0~1.0A	+10%,-5%	15V/0.2~3.0A	±3%	5V/2.0~15A	±3%	3.3V/0.0~15A
31230	PPQ-1003D	MEAN WELL	MEAN WELL_100W Quad Output with PFC Function	±6%	24V/0.0~1.0A	±6%	12V/0.2~3.0A	±3%	5V/2.0~15A	±3%	3.3V/0.0~15A



FEATURES:

- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- Protections: Short circuit/Over load/Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- Fixed switching frequency at 70KHz(Optional)
- 3 years warranty

Voltage range: 90~264VAC 127~370VDC

AC CURRENT: 1. 65A/115VAC 0. 85A/ 230VAC



INRUSH CURRENT (max.): Cold start 40A

LEAKAGE CURRENT: <3. 5mA/ 240VAC

WORKING TEMP.: -10 ~ +60°C(Refer to output load derating curve)

SAFETY STANDARDS: UL60950-1, TUV EN60950-1 Approved

WITHSTAND VOLTAGE: I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0. 5KVAC

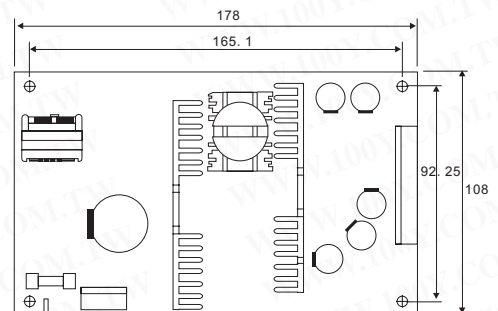

Part No.	Product No.	Manufacturer	Description	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current
31235	PPQ-100B	MEAN WELL	MEAN WELL_100W Quad Output with PFC Function	±5%	-5V/0.0~1.0A	±5%	-12V/0.0~1.0A	±8%	12V/0.3~4.0A	±3%	5V/2.0~15A
31237	PPQ-100 C	MEAN WELL	MEAN WELL_100W Quad Output with PFC Function	±5%	-5V/0.0~1.0A	±5%	-15V/0.0~1.0A	-6%,+10%	15V/0.3~4.0A	±3%	5V/2.0~15A
31240	PPQ-100D	MEAN WELL	MEAN WELL_100W Quad Output with PFC Function	±5%	-12V/0.0~1.0A	±5%	12V/0.0~1.0A	±8%	24V/0.3~4.0A	±3%	5V/2.0~10A



T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail : Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai: 100y-1@163.com