



Power Supplies & UPS

60-200W Triple Output Switching Power Supply

Detailed product specifications are available on: us.100y.com.tw



FEATURES:

- Low cost, high reliability.
- Compact size, light weight
- 105°C output capacitor.
- 100% full load burn-in test.
- International AC input range.
- Built in EMI filter, low ripple noise
- High efficiency, low working temperature.
- Soft-start circuit, limiting AC surge current.
- Short circuit, overload, over voltage protected

INPUT VOLTAGE RANGE: 90 ~ 264VAC 47 ~ 440Hz; 120~370VDC

AC CURRENT: 1. 5A/115VAC 0. 9A/230VAC


INRUSH CURRENT(max.): COLD START 20A/115VAC 40A/230V

LEAKAGE CURRENT: <0. 5mA

WORKING TEMP. HUMIDITY: -10 ~ +60°C(Refer to output load derating curve) 20%~90% RH

SAFETY STANDARDS: UL1950, TUV EN60950 Approved

WITHSTAND VOLTAGE: I/P-O/P: 3KVAC I/P-FG: 1.5KVAC O/P-FG: 0.5KVAC 1min.

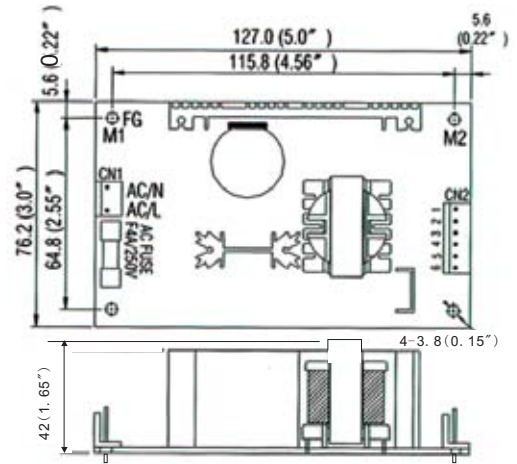

Part No.	Product No.	Manufacturer	Description	Output Volt./Current	Tol.(±)	Output Volt./Current	Tol.(±)	Tol.(±)	Output Volt./Current
21015	PT-65A	MEAN WELL	MEAN WELL_65W Triple Outputs Switching Power Supply	+5V/0.4-7A	±4%	+12V/0.2-3.2A	±7%	±5%	-5V/0-0.7A
16399	PT-65B	MEAN WELL	MEAN WELL_65W Triple Output Switching Power Supply	-12V/0.0~0.7A	±5%	+12V/0.2~3.2A	±7%	±4%	+5V/0.4~7.0A
15284	PT-65C	MEAN WELL	MEAN WELL_65W Triple Output Switching Power Supply	-15V/0-0.7A	±5%	+15V/0.2-2.6A	±7%	±4%	+5V/0.4-7A



FEATURES:

- Low cost, high reliability.
- Compact size, light weight
- 105°C output capacitor.
- 100% full load burn-in test.
- International AC input range.
- Built in EMI filter, low ripple noise
- High efficiency, low working temperature.
- Soft-start circuit, limiting AC surge current.
- Short circuit, overload, over voltage protected

INPUT VOLTAGE RANGE: 90 ~ 264VAC 47 ~ 440Hz; 120~370VDC


AC CURRENT: 1. 5A/115VAC 0. 9A/230VAC

INRUSH CURRENT(max.): COLD START 20A/115VAC 40A/230V

LEAKAGE CURRENT: <0. 5mA

WORKING TEMP. HUMIDITY: -10 ~ +50°C 20%~90% RH

WITHSTAND VOLTAGE: I/P-O/P: 3KVAC I/P-FG: 1.5KVAC O/P-FG: 0.5KVAC 1min.

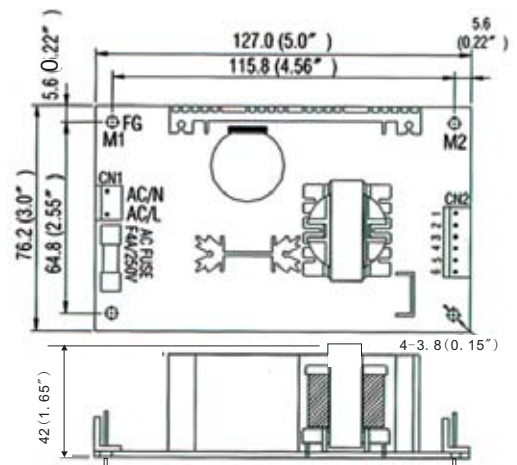

Part No.	Product No.	Manufacturer	Description	Output Volt./Current	Tol.(±)	Output Volt./Current	Tol.(±)	Tol.(±)	Output Volt./Current
21016	PT-65D	MEAN WELL	MEAN WELL_65W Triple Outputs Switching Power Supply	+5V/0.5-5A	±4%	+12V/0.2-4A	±6%	±6%	+24V/0.2-1.3A



FEATURES:

- Universal AC input/Full range
- 12V or 24V high peak output current capability
- Optional L-Bracket and cover
- Low leakage current <1mA
- Protections: Short circuit/Overload/Over voltage
- 65W free air convection, 80W with 18CFM forced air
- 100% full load burn-in test
- Fixed switching frequency at 65KHz
- 2 years warranty

INPUT VOLTAGE RANGE: 90 ~ 264VAC 127 ~ 370VDC

AC CURRENT(Typ.): 1.5A/115VAC 0.9A/230VAC

INRUSH CURRENT(Typ.): COLD START 25A/115VAC 50A/230VAC

LEAKAGE CURRENT: <1mA


WORKING TEMP.: -20 ~ +60°C(Refer to output load derating curve)

SAFETY STANDARDS: UL60950-1, TUV EN60950-1 Approved

WITHSTAND VOLTAGE: I/P-O/P: 3KVAC I/P-FG: 1.5KVAC O/P-FG: 0.5KVAC



RPT-65 Series

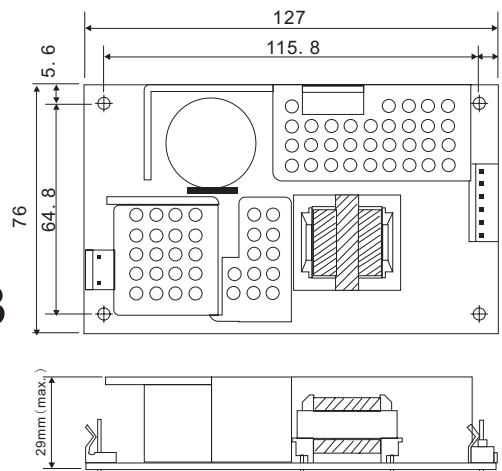

Part No.	Product No.	Manufacturer	Description	Output Volt./Current	Tol.(±)	Output Volt./Current	Tol.(±)	Tol.(±)	Output Volt./Current
47683	RPT-65E	MEAN WELL	65W Triple Output Switching Power Supply	12V/0.18~5.8A	+2%	5V/0~1.5A	+5%	+56%	-5V/0~0.7A
47581	RPT-65E	MEAN WELL	65W Triple Output Switching Power Supply	12V/0.18~5.8A	+2%	5V/0~1.5A	+5%	+56%	-5V/0~0.7A



T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail: Taiwan: sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai: 100y-1@163.com