
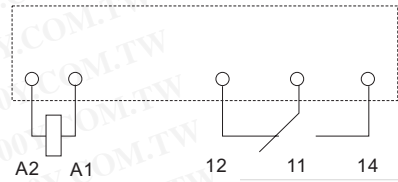


Relays & Solenoids

Finder_PCB Relays

Detailed product specifications are available on: us.100y.com.tw


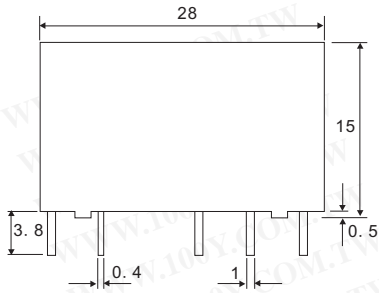


Part No.	Product No.	Manufacturer	Description	Type	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Outline L*W*H
40418	34.51.7.024.0010	Finder	Ultraslim relay (EMR)	34.51	1 CO (SPDT)	6A	24Vdc	GOST,CUL,VDE	28x5x15



1 pole, 16 A
5 mm pinning
PCB/ for use with 95 series sockets

- P.C.B. or plug-in mount
- AC, DC, sensitive DC or single bistable coil versions available
- 8 mm, 6 kV (1.2/50 μs) between coil and contacts
- Ambient temperature +85°C
- Sockets and accessories: see 95 and 99 series

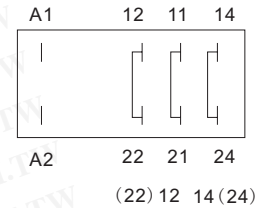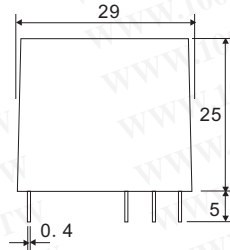

Contact specifications

Contact configuration: 1 CO (SPDT)

Rated current/Maximum peak current (A) : 16/30

Rated voltage/Maximum switching voltage (V AC) : 250/400*

Rated load in AC1 (VA) : 4,000

Rated load in AC15 (230 VAC) (VA) : 750

Single phase motor rating (230 VAC) (kW/HP) : 0.55/0.8

Breaking capacity in DC1: 30/110/220V (A) : 16/0.3/0.12

Minimum switching load (mW (V/mA)) : 500 (10/5)

Standard contact material: AgCdO

Part No.	Product No.	Manufacturer	Description	Type	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Outline L*W*H
36601	40.61.7.005	Finder	Miniature P.C.B. Relays	40.61	1 CO (SPDT)	16A	5Vdc	CSA,UR,VDE	12.4*29*25
36600	40.61.7.006	Finder	Miniature P.C.B. Relays	40.61	1 CO (SPDT)	16A	6Vdc	CSA,UR,VDE	12.4*29*25
36602	40.61.7.012	Finder	Miniature P.C.B. Relays	40.61	1 CO (SPDT)	16A	12Vdc	CSA,UR,VDE	12.4*29*25
23317	40.61.7.024	Finder	Miniature P.C.B. Relays	40.61	1 CO (SPDT)	16A	24Vdc	CSA,UR,VDE	12.4*29*25
36603	40.61.7.048	Finder	Miniature P.C.B. Relays	40.61	1 CO (SPDT)	16A	48Vdc	CSA,UR,VDE	12.4*29*25
36604	40.61.7.110	Finder	Miniature P.C.B. Relays	40.61	1 CO (SPDT)	16A	110Vdc	CSA,UR,VDE	12.4*29*25
40542	40.61.8.230	Finder	Miniature P.C.B. Relay	40.61	1 CO (SPDT)	16A	230VAC	CSA,UR,VDE	12.4*29*25
44338	40.61.9.012	Finder	Miniature P.C.B. Relays				12Vdc	CSA,UR,VDE	12.4*29*25



Contact specifications

Contact configuration: 2 CO

Rated current/Maximum peak current (A) : 6/10



Rated voltage/Maximum switching voltage (V AC) : 250/400*

Rated load in AC1 (VA) : 1,500

Rated load in AC15 (230 VAC) (VA) : 250

Single phase motor rating (230 VAC) (kW) : 0.185

- DC and sensitive DC available
- 8 mm, 6 kV (1.2/50 μs) between coil and contacts
- Ambient temperature +85°C
- Sockets and accessories: see 95, 99 and 86 series

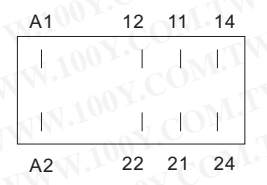

Breaking capacity in DC1: 30/110/220V (A) : 6/0.3/0.13

Minimum switching load (mW (V/mA)) : 300 (5/5)

Standard contact material: AgNi

Part No.	Product No.	Manufacturer	Description	Type	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Outline L*W*H
36606	44.52.7.006	Finder	Miniature P.C.B. Relays	44.52	2 CO (DPDT)	6A	6Vdc	CSA,UR,VDE	12.4*29*25
36607	44.52.7.009	Finder	Miniature P.C.B. Relays	44.52	2 CO (DPDT)	6A	9Vdc	CSA,UR,VDE	12.4*29*25
36615	44.52.7.012	Finder	Miniature P.C.B. Relays	44.52	2 CO (DPDT)	6A	12Vdc	CSA,UR,VDE	12.4*29*25
36616	44.52.7.014	Finder	Miniature P.C.B. Relays	44.52	2 CO (DPDT)	6A	14Vdc	CSA,UR,VDE	12.4*29*25
17876	44.52.7.024	Finder	Miniature P.C.B. Relays	44.52	2 CO (DPDT)	6A	24Vdc	CSA,UR,VDE	12.4*29*25
36617	44.52.7.028	Finder	Miniature P.C.B. Relays	44.52	2 CO (DPDT)	6A	28Vdc	CSA,UR,VDE	12.4*29*25
36618	44.52.7.048	Finder	Miniature P.C.B. Relays	44.52	2 CO (DPDT)	6A	48Vdc	CSA,UR,VDE	12.4*29*25
36620	44.52.7.060	Finder	Miniature P.C.B. Relays	44.52	2 CO (DPDT)	6A	60Vdc	CSA,UR,VDE	12.4*29*25
36621	44.52.7.110	Finder	Miniature P.C.B. Relays	44.52	2 CO (DPDT)	6A	110Vdc	CSA,UR,VDE	12.4*29*25
36622	44.52.7.125	Finder	Miniature P.C.B. Relays	44.52	2 CO (DPDT)	6A	125Vdc	CSA,UR,VDE	12.4*29*25



T E L : Taiwan : 886-3-5753170
F A X : Taiwan : 886-3-5753172
E-mail : Taiwan : us_sale@100y.com.tw

Shenzhen : 86-755-83298787
Shenzhen : 86-755-83640655
Shenzhen : 100y@163.com

Shanghai : 86-21-54151736
Shanghai : 86-21-64605107
Shanghai : 100y-1@163.com