



Relays & Solenoids

Finder PCB Relays

Detailed product specifications are available on: us.100y.com.tw



Contact specification

Contact configuration : 2 CO (DPDT)
 Rated current/Maximum peak current (A) : 10/20
 Rated voltage/Maximum switching voltage (V AC) : 250/400
 Rated load AC1 (VA) : 2,500
 Rated load AC15 (230 V AC) (VA) : 500
 Single phase motor rating (230 V AC) (kW) : 0.37
 Breaking capacity DC1: 30/110/220 V (A) : 10/0.4/0.15
 Minimum switching load (mW (V/mA)) : 500 (10/5)
 Standard contact material : AgNi

Technical data

Mechanical life AC/DC (cycles) : 20 · 10⁶/50 · 10⁶
 Electrical life at rated load AC1 (cycles) : 200 · 10³
 Operate/release time (ms) : 9/9
 Insulation between coil and contacts (1.2/50 μs) (kV) : 3.6
 Dielectric strength between open contacts (V AC) : 1,000
 Ambient temperature range (°C) : -40...+70
 Environmental protection : RT I





Part No.	Product No.	Manufacturer	Description	Type	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Outline L*W*H
39190	60.12.8.230.0040	Finder	PCB Relays	60.12	2 FORM-C	10A	23V	CSA,UR,VDE	18*32.2*36.5
39191	60.12.9.024.0040	Finder	PCB Relays	60.12	2 FORM-C	10A	24V	CSA,UR,VDE	18*32.2*36.5
39192	62.32.9.024.0000	Finder	PCB Relays	62.32	2 FORM-C	16A	24V	CSA,UR,VDE	22.2*38.2*35.8
39193	62.32.9.024.0040	Finder	PCB Relays	62.32	2 FORM-C	16A	24V	CSA,UR,VDE	22.2*38.2*35.8



FEATURES:

- 17.5 mm wide
- Rotary selector
- Six time scales from 0.1s to 20h
- High input/output isolation
- 35 mm rail (EN 50022) mount

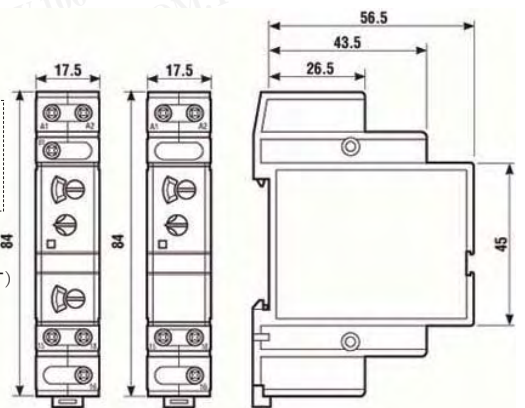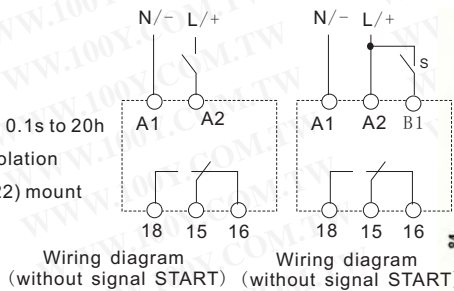

Multi-voltage
 Multi-function

Contact specification

Contact configuration : 1 CO (SPDT)
 Rated current/Maximum peak current (A) : 16/30
 Rated voltage/Maximum switching voltage (V AC) : 250/400
 Rated load AC1 (VA) : 4,000
 Rated load AC15 (230 V AC) (VA) : 750
 Single phase motor rating (230 V AC) (kW) : 0.55
 Breaking capacity DC1: 30/110/220 V (A) : 16/0.3/0.12
 Minimum switching load (mW(V/mA)) : 500 (10/5)
 Standard contact material : AgCdO

Technical data

Repeatability : ±1%
 Recovery time : ≤50ms
 Minimum control impulse : 50ms
 Setting accuracy-full range : ±5%
 Electrical life at rated load in AC1: 100·10³ cycles
 Ambient temperature range : -10...+50°C




Part No.	Product No.	Manufacturer	Description	Type	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Outline L*W*H
39194	80.01.0.240.0000	Finder	Modular timer	80.01	2 FORM-C	10A	24VAC/24VDC	CSA,UR,VDE	84*17.5*56.5



Technical data

Rated values : 16 A - 250 V
 Insulation : ≥6 kV (1.2/50 μs) between coil and contacts
 Protection category : IP20
 Ambient temperature : -40...+70°C
 Wire strip length : 10mm

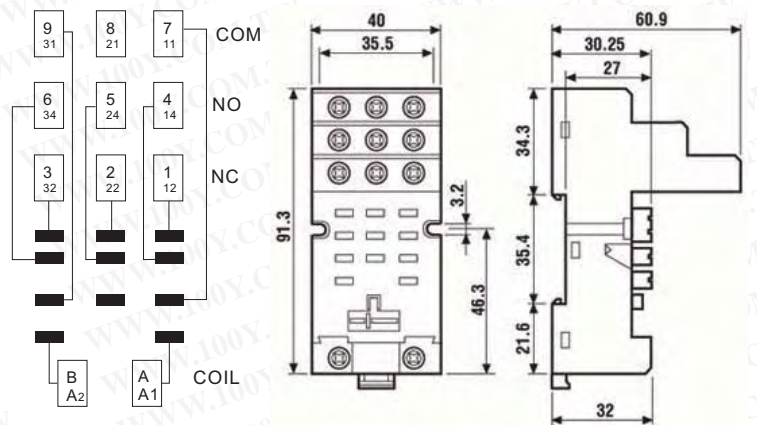

Part No.	Product No.	Manufacturer	Description	Type	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Outline L*W*H
39195	92.03	Finder	Sockets and accessories	92.03	2 FROM-C	16A	250V	CSA,UR,VDE	91.3*40*60.9

- We provide a wide range of products to development and maintenance engineers in all type of business
- If you cannot find the components you want on the catalogue, please call us.



Taiwan : 886-3-5753170
 Shanghai : 021-54151736 Shenzhen : 0755-83298787

Centenary Materials

Waiting for your phone call



T E L : Taiwan : 886-3-5753170
 F A X : Taiwan : 886-3-5753172
 E-mail : Taiwan : us_sale@100y.com.tw

Shenzhen : 86-755-83298787
 Shenzhen : 86-755-83640655
 Shenzhen : 100y@163.com

Shanghai : 86-21-54151736
 Shanghai : 86-21-64605107
 Shanghai : 100y-1@163.com