


# Resistors & Potentiometers



## Power Wirewound Resistors Flame-Proof Coating

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)

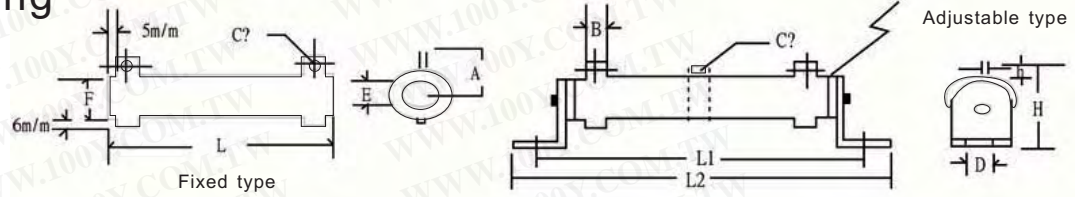

POWER RATING	DIMENSIONS (mm)											
	L±2	F±1	E±0.2	A±0.1	B±0.2	L1±2	CØ±0.1	h±1	D±0.1	L2±2	H±2	RESISTANCE RANGE(Ω)
20W	60	17	8	20	5	73	2.5	12	3	92	37	1Ω-20KΩ
30W	80	17	8	20	5	93	2.5	12	3	142	37	1Ω-30KΩ
50W	110	25	16	30	8	140	4	18	5	164	58	0.1Ω-50KΩ
100W	140	28	18	32	8	170	4	18	5	194	60	0.1Ω-100KΩ
250W	210	40	25	38	10	250	5	22	9	277	77	0.5Ω-250KΩ
500W	330	50	35	50	15	370	6	22	9	400	105	0.5Ω-500KΩ
1000W	540	60	40	60	15	590	6	30	9	620	112	1Ω-1MΩ

Part No.	Product No.	Manufacturer	Description	Resistance (Ω)	Tolerance (±)	Power W	L*F(mm)
39133	RK1000W100JR		Power Wirewound Resistors	100ohm	±5%	1000	540*60
20098	RK1000W2E00J		Big Power Resistor	2 ohm	+/-5%	1000W	540*60
19807	RK100W100KJT		Power Wirewound Resistors Flame-Proof Coating	100K ohm	+/-5%	100W	200*30
14153	RK100W4E00J		Power Wirewound Resistors Flame-Proof Coating	4 ohm	+/-5%	100W	140*28
38948	RK120W0E40JT	LIKET	RIBBON TYPE	0.4 ohm	+/-5%	120W	143*28
19806	RK20W2K00JT		Power Wirewound Resistors Flame-Proof Coating	2K ohm	+/-5%	20W	90*18
30289	RK250W100EJ	LIKET	Power Wirewound Resistors	100ohm	±5%	250	210*40
30288	RK250W900EJ	LIKET	Power Wirewound Resistors	900ohm	±5%	250	210*40
24678	RK30W120EFT		Power Wirewound Resistors Flame-Proof Coating	120 ohm	+/-5%	30W	
20429	RK50W100EFT		Power Wirewound Resistors Flame-Proof Coating	100 ohm	+/-5%	50W	110*25
14152	RK50W4E00J		Power Wirewound Resistors Flame-Proof Coating	4 ohm	+/-5%	50W	110*25
14151	RK50W6E00J		Power Wirewound Flame-Proof Coating	6 ohm	+/-5%	50W	110*25
14150	RK50W8E00J		Power Wirewound Resistors Flame-Proof Coating	8 ohm	+/-5%	50W	110*25
14727	RKJ03E00J		Power Wirewound Resistors Flame-Proof Coating	3 ohm	+/-5%	1000W	540*60
47745	RWF100WJ3K0		Power Wire wound Resistors	3K ohm	±5%	100W	15.2*2.7
44160	RWS1000WJ2E0		Power Wire wound Resistors	500 ohm	±5%	1000	60*460
43956	RWS1000WJ501		Power Wire wound Resistors	500 ohm	±5%	1000	60*460
44161	RWS500WJ0E25		Power Wire wound Resistors	0.25 ohm	±5%	500W	10*19
48679	SR500W50RJ		Power Wirewound Resistors	50ohm	±5%	500W	

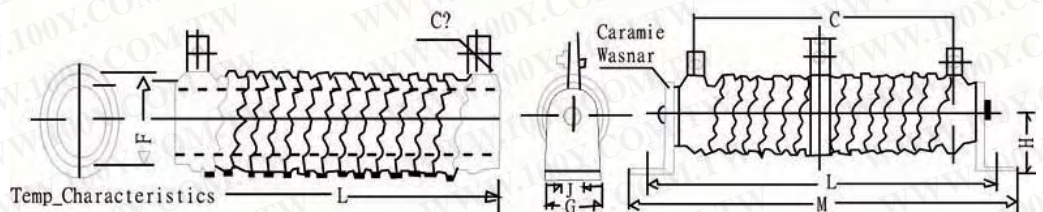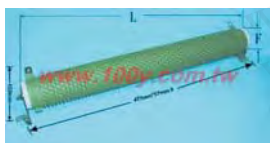

### FEATURES

- High resistivity to heat small resistance temp coefficient and the change in resistance with temperature being linear.
- Resistance value unchanged after long use, good resistivity to short time overload.
- Small in size, able to take large load, fit for use on heavy electric machines and production machines.
- Multi-terminal types and adjustable types available.

POWER RATING	DIMENSIONS (mm)									
	L±2	G±1	M±2	l±2	C±2	F±1	H±2	J±0.1	CØ±0.1	RESISTANCE RANGE(Ω)
1500W	584	58	613	540	505	60	112	10	6.2	1.0Ω-150Ω

