

Drivers & Interface IC


Telcom_MOSFET/IGBT Drivers

Detailed product specifications are available on: us.100y.com.tw

Part No.	Product No.	Manufacturer	Description	Pins/Package
37628	TC427EPA	TELCOM	1.5A DUAL HIGH-SPEED POWER MOSFET DRIVERS	8P/DIP
32275	TC429CPA	TELCOM	6A SINGLE HIGH-SPEED, CMOS POWER MOSFET DRIVER	8P/DIP
28098	TC4403CPA	MICRO-CHIP	1.5A HIGH-SPEED, FLOATING LOAD DRIVER	8P/DIP
32210	TC4403CPA	TELCOM	1.5A HIGH-SPEED, FLOATING LOAD DRIVER	8P/DIP
33851	TC4422CPA	MICRO-CHIP	9A High-Speed MOSFET Drivers	8P/DIP
33848	TC4427CPA	MICRO-CHIP	1.5A DUAL HIGH-SPEED POWER MOSFET DRIVERS	8P/DIP
42736	TC4427CPA	TELCOM	1.5A DUAL HIGH-SPEED, POWER MOSFET DRIVERS	8P/DIP
33845	TC4428CPA	MICRO-CHIP	1.5A DUAL HIGH-SPEED POWER MOSFET DRIVERS	8P/DIP

Elantec_MOSFET & IGBT Drivers


Detailed product specifications are available on: us.100y.com.tw



Part No.	Product No.	Manufacturer	Description	Pins/Package	Supply voltage	Operating Temp
33085	EL7202CN	Elantec	High Speed, Dual Channel Power MOSFET Drivers	8-Pin P-DIP	15V	-40°C to 85°C
33086	EL7212CN	Elantec	High Speed, Dual Channel Power MOSFET Drivers	8-Pin P-DIP	15V	-40°C to 85°C
41252	EL7212CS	Elantec	DUAL CHANNEL POWER MOSFET DRIVERS	8P/DIP	16.5V	-40°C TO +80°C
33087	EL7242CN	Elantec	Dual Input, High Speed, Dual Channel Power MOSFET Driver	8-Pin P-DIP	16V	-40°C to 85°C

Modems, Telecom Ics Modems, Telecom Ics

Detailed product specifications are available on: us.100y.com.tw

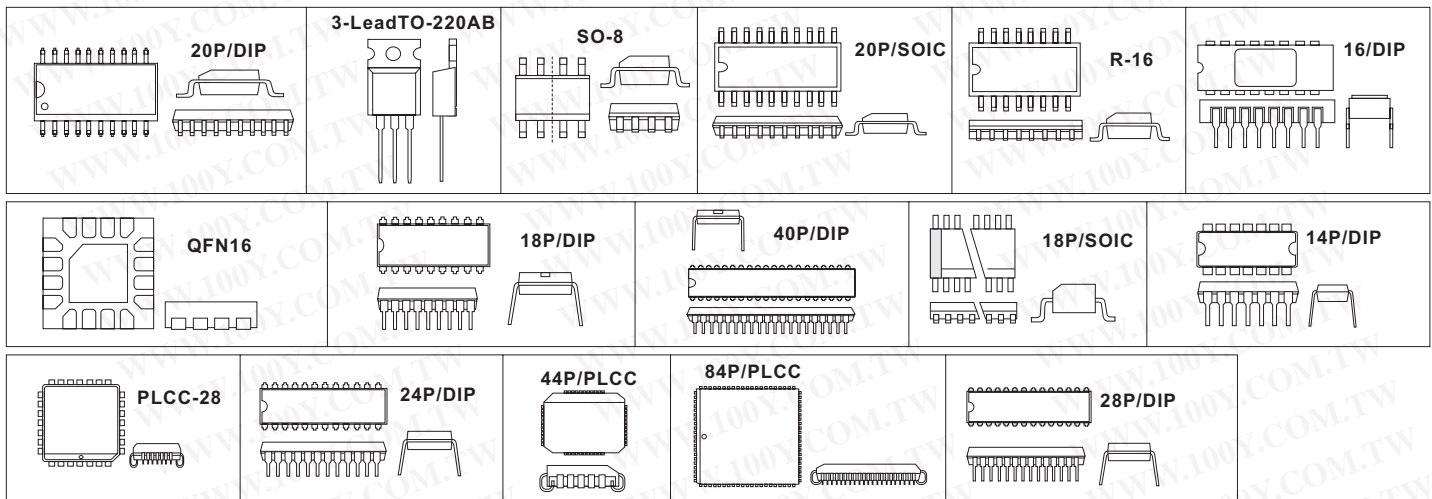

Part No.	Product No.	Manufacturer	Description	Pins/Package	Operating Temp.	Supply voltage
23237	20PT1024		10/100 BASE-TX LAN MAGNETICS FOR AUTO MDI/MDIX APPLICATION	20P/DIP	0-70°C	
26051	20PT1024X		10/100 BASE-TX LAN MAGNETICS FOR AUTO MDI/MDIX APPLICATION	20P/DIP	0-70°C	
42783	2SK1542	TOSHIBA	Modems, Telecom Ics	TO-220	-55-150	60V
41428	65HVD3082EP	T.I.	low-power rs-485 transceiver available in small moeop-8 package	MSOP-8	-40°C-85°C	7
13194	AD598JR	ADI	LVDT Signal Conditioner	20P/SOIC	0°C to +70°C	13-16V
32361	AD630BD	ADI	Balanced Modulator/Demodulator	20P/DIP	-25°C to +85°C	±5 to ±16.5 Volts
32362	AD630JN	ADI	Balanced Modulator/Demodulator	20P/DIP	0°C to +70°C	±5 to ±16.5 Volts
44519	AD694AR	ADI	4-20 mA Transmitter	R-16	-40+85C	+4.5 V
32659	ADXL202JQC	ADI	Low Cost ±2 g/±10 g Dual Axis iMEMS Accelerometers with Digital Output	14-Lead CERPAK	0°C to +70°C	+3 V to +5.25 V
49226	ADXL330KCPZ	ADI	Small, Low Power, 3-Axis ±3 gi MEMSR Accelerometer	16-Lead LFCSP	-25°C - 70°C	2-3.6V
7166	AK8870G	AsahiKASEI	Intergrated DTMF receiver	18P/DIP	-40~+85°C	4.75-5.25V
17962	CM8870P1	CAMD	Intergrated DTMF receiver	18P/DIP	-40~+85°C	4.75-5.25V
33316	HD3-4702-9	Intersil	CMOS Programmable Bit Rate Generator	16P/DIP	-40°C-85°C	+8.0V
39256	HT-12E	HOLTEK	Series of Encoders	18P/DIP	20 C to 75 C	2.4V-12V
27620	HT82K628A	HOLTEK	Windows 2000 Keyboard Encoder	40P/DIP	- 25 °C to 70 °C	-0.3-5.5V
43610	HT82K68E	HOLTEK	MultimediaKeyboardEncoder8-BitOTPMCU	SSOP-48	-25°C to 70°C	6
33260	HT9170D	HOLTEK	DTMF Receiver	18-pin SOP	-20°C to 75°C	2.5V-5.5V
22617	HT9200A	HOLTEK	DTMF Generators	8P/DIP	-20-75°C	2-5.5V
16986	ICS1893AF	ICS	ICS3.3-V 10Base-T/100Base-TX Integrated PHYceiver (TM)	48P/SSOP	0°C-70°C	3.3V
22648	L3240N	ST(SGS)	ELETRONIC TWO-TONE RINGER	8P/DIP	-20-70°C	26V
44258	LM1496H	N.S	Balanced Modulator-Demodulator	8P/Metal Can	0°C to +70°	
42339	MAX3646ETG+T	MAXIM	155Mbps to 622Mbps SFF/SFP Laser Driver with Extinction Ratio Control	24 Thin QFN	-40°C to +85°C	+3.3V
42343	MAX3656ETG-T	MAXIM	155Mbps to 2.5Gbps Burst-ModeLaser Driver	24 Thin QFN-EP**	-40°C to +85°	+3.3V
42347	MAX3737ETJ+	MAXIM	Multirate Laser Driver with Extinction Ratio Control	32 Thin QFN	-40°C to +85°C	+3.3V
42458	MAX4717EUB+T	MAXIM	4.5? /20?, 300MHz Bandwidth, Dual SPDTAnalog Switches in UCSP	10 μMAX		
3831	MC1496P	MOTOROLA	Balanced modulator/demodulator	14P/DIP	0°C to +70°C 0-70°C	12V

