


Logic IC

74~ TTL Logic Families

Detailed product specifications are available on: us.100y.com.tw

Part No.	Product No.	Manufacturer	Description	Pins/Package	Vcc	Operating Temp.
43885	SN74LV123APWT	T.I.	TI_TSSOP-16_Reel of 250	TSSOP-16	2-5.5V	-40 °C to 85 °C
43223	SN74LV126ADR	T.I.	TI_SOIC-14_Reel of 2000	SOIC-14	2-5.5V	-40 °C to 85 °C
43911	SN74LV163ADBR	T.I.	TI_SSOP-16_Reel of 2000	SSOP-16	2-5.5V	-40 °C to 85 °C
43913	SN74LV163ADR	T.I.	TI_SOIC-16_Reel of 2500	SOIC-16	2-5.5V	-40 °C to 85 °C
43915	SN74LV164ADR	T.I.	TI_SOIC-14_Reel of 2500	SOIC-14	2-5.5V	-40 °C to 85 °C
43917	SN74LV164APWR	T.I.	TI_TSSOP-14_Reel of 2000	TSSOP-14	2-5.5V	-40 °C to 85 °C
43919	SN74LV165ADR	T.I.	TI_SOIC-16_Reel of 2500	SOIC-16	2-5.5V	-40 °C to 85 °C
43921	SN74LV175APWR	T.I.	TI_TSSOP-16_Reel of 2000	TSSOP-16	2-5.5V	-40 °C to 85 °C
43946	SN74LV240ADBR	T.I.	TI_SSOP-20_Reel of 2000	SSOP-20	2-5.5V	-40 °C to 85 °C
43947	SN74LV240ADWR	T.I.	TI_SOIC-20_Reel of 2000	SOIC-20	2-5.5V	-40 °C to 85 °C
43949	SN74LV244ADBR	T.I.	TI_SSOP-20_Reel of 2000	SSOP-20	2-5.5V	-40 °C to 85 °C
43951	SN74LV273APWR	T.I.	TI_TSSOP-20_Reel of 2000	TSSOP-20	2-5.5V	-40 °C to 85 °C
43954	SN74LV32ANSR	T.I.	TI_SOP-14_Reel of 2000	SOP-14	2-5.5V	-40 °C to 85 °C
43955	SN74LV4052APWR	T.I.	TI_TSSOP-16_Reel of 2000	TSSOP-16	2-5.5V	-40 °C to 85 °C
43960	SN74LV595APWR	T.I.	TI_TSSOP-16_Reel of 200	TSSOP-16	2-5.5V	-40 °C to 85 °C
43963	SN74LV86ADR	T.I.	TI_SOIC-14_Reel of 2500	SOIC-14	2-5.5V	-40 °C to 85 °C
43968	SN74LVC04ADR	T.I.	TI_SOIC-14_Reel of 2500	SOIC-14	-0.5-6.5v	-40°C to 125°C
43982	SN74LVC04APWR	T.I.	TI_TSSOP-14_Reel of 2000	TSSOP-14	-0.5-6.5v	-40°C to 125°C
43985	SN74LVC06ADR	T.I.	TI_SOIC-14_Reel of 2500	SOIC-14	-0.5-6.5v	-40°C to 125°C
43988	SN74LVC07APWR	T.I.	TI_TSSOP-14_Reel of 2000	TSSOP-14	-0.5-6.5v	-40°C to 85°C
43990	SN74LVC10AD	T.I.	TI_SOIC-14_Tube of 50	SOIC-14	-0.5-6.5v	-40°C to 125°C
43994	SN74LVC126APWR	T.I.	TI_TSSOP-14_Reel of 2000	TSSOP-14	-0.5-6.5v	-40°C to 125°C
43996	SN74LVC138ADBR	T.I.	TI_SSOP-16_Reel of 2000	SSOP-16	-0.5-6.5v	-40°C to 85°C
43999	SN74LVC138APWR	T.I.	TI_TSSOP-16_Reel of 2000	TSSOP-16	-0.5-6.5v	-40°C to 85°C
44031	SN74LVC14ADBR	T.I.	TI_SSOP-14_Reel of 2000	SSOP-14	-0.5-6.5V	-40°C to 125°C
44034	SN74LVC14APWR	T.I.	TI_TSSOP-14_Reel of 2000	TSSOP-14	-0.5-6.5v	-40°C to 125°C
44035	SN74LVC16244AGQLR	T.I.	TI_VFBGA_Tape and reel	VFBGA	-0.5-6.5V	-40°C to 85°C
44037	SN74LVC16373ADGGR	T.I.	TI_TSSOP-48_Tape and reel	TSSOP-48	-0.5-6.5V	-40°C to 85°C
44039	SN74LVC1G00DCKR	T.I.	TI_SOP-5(SC-70)_Reel of 3000	SOP-5(SC-70)	-0.5-6.5V	-40°C to 85°C
49321	SN74LVC1G04DBVR	T.I.	SINGLE INVERTER GATE	SOT-23-5P		-40°C to 85°C
44043	SN74LVC1G04DCKR	T.I.	TI_SOT-5(SC-70)_Reel of 3000	SOT-5(SC-70)	-0.5-6.5V	-40°C to 85°C
44044	SN74LVC1G07DBVR	T.I.	TI_SOT-5(SC-70)_Reel of 3000	SOT-5(SC-70)	-0.5-6.5V	-40°C to 85°C
44084	SN74LVC1G08DCKR	T.I.	TI_SOT-5_Reel of 3000	SOT-5	-0.5-6.5V	-40°C to 85°C
44098	SN74LVC1G10DCKR	T.I.	TI_SOT(SC-70)-6_Reel of 3000	SOT(SC-70)-6	-0.5-6.5V	-40°C to 85°C
44103	SN74LVC1G125DCKR	T.I.	TI_SOT(SC-70)-5_Reel of 3000	SOT(SC-70)-5	-0.5-6.5V	-40°C to 85°C
44109	SN74LVC1G126DCKR	T.I.	TI_SOT(SC-70)-5_Reel of 3000	SOT(SC-70)-5	-0.5-6.5V	-40°C to 85°C
44112	SN74LVC1G14DBVR	T.I.	TI_SOT-23/5_Reel of 3000	SOT-23/5	-0.5-6.5V	-40°C to 85°C
44118	SN74LVC1G14DCKR	T.I.	TI_SOT(SC-70)/5_Reel of 3000	SOT(SC-70)/5	-0.5-6.5V	-40°C to 85°C
44121	SN74LVC1G3157DCKR	T.I.	TI_SOT(SC-70)_Tape and reel	SOT(SC-70)	-0.5-6.5V	-40°C to 85°C
44125	SN74LVC1G32DBVR	T.I.	TI_SOT(SOT-23)/5_Reel of 3000	SOT(SOT-23)/5	-0.5-6.5V	-40°C to 85°C
44128	SN74LVC1G79DCKR	T.I.	TI_SOT(SC-70)/5_Reel of 3000	SOT(SC-70)/5	1.65-5.5V	-40°C to 85°C
44130	SN74LVC1G80DCKR	T.I.	TI_SOT(SC-70)/5_Reel of 3000	SOT(SC-70)/5	1.65-5.5V	-40°C to 85°C
44131	SN74LVC1T45DCKR	T.I.	TI_SOT(SC-70)/6_Reel of 3000	SOT(SC-70)/6	1.65-5.5V	-40°C to 85°C
44134	SN74LVC2244APWR	T.I.	TI_TSSOP_Reel of 2000	TSSOP/LE244A	-0.5-6.5V	-40°C to 85°C
44137	SN74LVC244ADBR	T.I.	TI_SSOP-20_Reel of 2000	SSOP-20/LC244A	-0.5-6.5V	-40°C to 125°C
44138	SN74LVC244APWR	T.I.	OCTAL BUFFER/DRIVER WITH 3-STATE OUTPUTS	20P/TSSOP	1.65-3.6V	-40°C to 125°C
44147	SN74LVC245ADBR	T.I.	OCTAL BUS TRANSCEIVER WITH 3-STATE OUTPUTS	20P/SSOP	1.65-3.6V	-40°C to 85°C
46378	SN74LVC245APWR	T.I.	OCTAL BUS TRANSCEIVER WITH 3-STATE OUTPUTS	20P/TSSOP	1.65-3.6V	-40°C to 85°C
44149	SN74LVC257APWR	T.I.	TI_TSSOP-16_Reel of 2000	TSSOP-16/LC257A	-0.5-6.5V	-40°C to 85°C
44151	SN74LVC257ARGYR	T.I.	TI_QFN_Reel of 1000	QFN/LC257A	-0.5-6.5V	-40°C to 85°C
44215	SN74LVC2G07DCKR	T.I.	TI_SOT-23/6_Reel of 3000	SOT-23/6	-0.5-6.5V	-40°C to 85°C
44326	SN74LVC2G08DCUR	T.I.	TI_VSSOP-8_Reel of 3000	VSSOP-8	-0.5-6.5V	-40°C to 85°C
44335	SN74LVC2G125DCUR	T.I.	TI_VSSOP-8_Reel of 3000	VSSOP-8	-0.5-6.5v	-40°C to 85°C
44339	SN74LVC2G34DBVR	T.I.	TI_SOT-23/6_Reel of 3000	SOT-23/6	-0.5-6.5V	-40°C to 85°C
44340	SN74LVC2G66DCTR	T.I.	TI_SSOP-8_Reel of 3000	SSOP-8	-0.5-6.5v	-40°C to 85°C
44342	SN74LVC2GU04DBVR	T.I.	TI_SOT-23/6_Reel of 3000	SOT-23/6	-0.5-6.5v	-40°C to 85°C
44343	SN74LVC32ADBR	T.I.	TI_SSOP-14_Reel of 2000	SSOP-14	1.65-3.6V	-40°C to 125°C
44344	SN74LVC373APWR	T.I.	OCTAL TRANSPARENT D-TYPE LATCHES WITH 3-STATE OUTPUTS	20P/TSSOP	1.65-3.6V	-40°C to 85°C
44356	SN74LVC374APWR	T.I.	TI_TSSOP-20_Reel of 2000	TSSOP-20	1.65-6.5v	-40°C to 85°C
44372	SN74LVC3G34DCUR	T.I.	TI_VSSOP-8_Reel of 3000	VSSOP-8	-0.5-6.5V	-40°C to 85°C
44373	SN74LVC574ADBR	T.I.	TI_SSOP-20_Reel of 2000	SSOP-20	1.65-3.6v	-40 °C to 125 °C
44374	SN74LVC574APWR	T.I.	TI_TSSOP-20_Reel of 2000	TSSOP-20	1.36-3.6V	-40 °C to 125 °C
44504	SN74LVC74ADR	T.I.	TI_SOIC-14_Reel of 2500	SOIC-14	-0.5-6.5v	-40 °C to 85°C
44509	SN74LVC86ADBR	T.I.	TI_SSOP-14_Reel of 2000	SSOP-14	1.65-3.6V	-40 °C to 125 °C

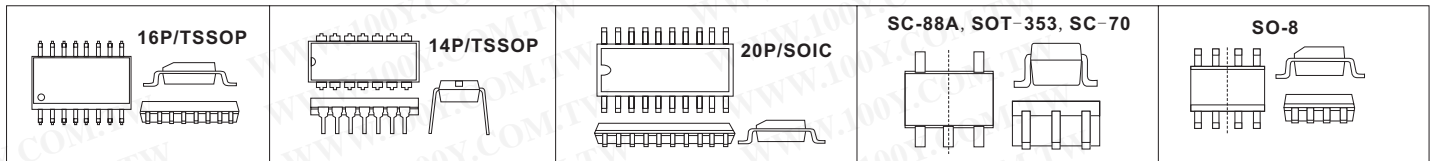