


# Logic IC

## 74HC~ High Speed CMOS Logic Families

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)

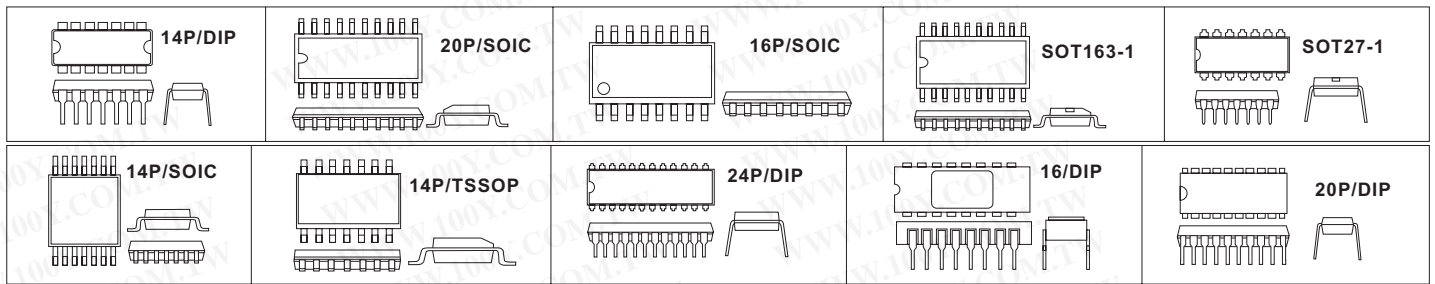

Part No.	Product No.	Manufacturer	Description	Pins/Package	Vcc(Supply voltage)	Operating Temp.
35466	MM74HC86N	Fairchild	Quad 2-Input Exclusive OR Gate	14P/DIP	2-6V	-40 to +85 °C
22319	MM74HCT04N	Fairchild	Hex Inverter	14P/PDIP	-0.5 ~7.0V	-65°C~150°C
22321	MM74HCT164N	Fairchild	8-Bit Serial-in/Parallel-out Shift Register	14P/PDIP	-0.5~7.0V	-65°C~150°C
33357	MM74HCT244WM	Fairchild	Inverting Octal 3-STATE Buffer	20P/SOIC	4.5~5.5V	-40~85°C
48286	MM74HCT373WM	Fairchild	3-STATE Octal D-Type Latch	20P/SOIC	4.5~5.5V	-40~85°C
35467	MM74HCU04N	Fairchild	Hex Inverter	14P/DIP	2 - 6V	-40 to +85 °C
40577	MN74HC165S	MATSUSHITA	Parallel-in/Serial-out 8-Bit Shift Register	16P/SOIC		
32471	N74F244D	PHILIPS	Octal buffers	SOT163-1	-0.5 to +7.0	0°C to +70°C
32473	N74F393N	PHILIPS	Dual 4-bit binary ripple counter	SOT27-1	5V ±10%,	0°C to +70°C
41630	SN74AC14D	T.I.	HEX SCHMITT-TRIGGER INVERTERS	SOIC/14P	∅0.5 V to 7 V	∅40 °C to 85 °C
11326	SN74HC00D	T.I.	QUADRUPLE 2-INPUT POSITIVE-NAND GATES	14P/SOIC	2-6V	-40~85°C
42816	SN74HC00DR	T.I.	QUADRUPLE 2-INPUT POSITIVE-NAND GATES	SOIC	-0.5 V to 7 V	-40 C to 85 C
19216	SN74HC00N	T.I.	Quadruple 2-Input Positive-NAND Gates	14P/DIP	2-6V	-40~+85°C
42817	SN74HC02D	T.I.	QUADRUPLE 2-INPUT POSITIVE-NOR GATES	SOIC	-0.5 V to 7 V	-40 C to 85 C
42818	SN74HC02DR	T.I.	QUADRUPLE 2-INPUT POSITIVE-NOR GATES	SOIC	-0.5 V to 7 V	-40 C to 85 C
34405	SN74HC02N	T.I.	QUADRUPLE 2-INPUT POSITIVE-NOR GATES	14P/DIP	2-6V	-40°C to 85°C
20578	SN74HC03N	T.I.	QUAD 2-IN NAND W/OD	14P-DIP	2-6V	-40~85°C
39224	SN74HC04D	T.I.	HEX INVERTERS	14P/SOIC	2-6V	-40~+85°C
19220	SN74HC04N	T.I.	Hex Inverter	14P/DIP	2-6V	-40~+85°C
41132	SN74HC04NSR	T.I.	Hex Inverte	SOP/14	2-6V	-40~+85°C
34404	SN74HC05N	T.I.	HEX INVERTERS WITH OPEN-DRAIN OUTPUTS	14P/DIP	2-6V	-40°C to 85°C
1032	SN74HC08D	T.I.	QUADRUPLE 2-INPUT POSITIVE-AND GATES	14P/SOIC	2-6V	-40~85°C
42819	SN74HC08DR	T.I.	QUADRUPLE 2-INPUT POSITIVE-AND GATES	SOIC	2-6V	-40~85°C
19222	SN74HC08N	T.I.	Quad 2-Input AND Gate	14P-DIP	2-6V	-40~+85°C
1033	SN74HC10D	T.I.	Triple 3-Input NAND Gate	14P/SOIC	2-6V	-40~85°C
34467	SN74HC10N	T.I.	TRIPLE 3-INPUT POSITIVE-NAND GATES	14P/DIP	2-6V	-40°C to 85°C
19249	SN74HC125	T.I.	3-STATE Quad Buffers	14P/DIP	2-6V	-40~85°C
42820	SN74HC125DR	T.I.	QUADRUPLE BUS BUFFER GATES WITH 3-STATE OUTPUTS	SOIC	2-6V	-40 C to 85 C
42821	SN74HC126D	T.I.	QUADRUPLE BUS BUFFER GATES WITH 3-STATE OUTPUTS	SOIC	2-6V	-40 C to 85 C
14902	SN74HC132DR	T.I.	QUADRUPLE POSITIVE-NAND GATES WITH SCHMITT-TRIGGER INPUTS	14P/SOP(M14D)	2-6V	-40 - 85°C
34583	SN74HC132N	T.I.	QUADRUPLE POSITIVE-NAND GATES WITH SCHMITT-TRIGGER INPUTS	14P/DIP	2-6V	-40°C to 85°C
11328	SN74HC138D	T.I.	3-to-8 line decoder/demultiplexer; inverting	16P/SOIC	2-6V	-40~85°C
19254	SN74HC138N	T.I.	LOGIC IC	16P/DIP		
42822	SN74HC139D	T.I.	DUAL 2-LINE TO 4-LINE DECODERS/DEMULPLEXERS	SOIC	2-6V	-40 C to 85 C
19255	SN74HC139N	T.I.	LOGIC IC	16P/DIP		
42827	SN74HC148DR	T.I.	8-LINE TO 3-LINE PRIORITY ENCODERS	SOIC	2-6V	∅40°C to 85°C
664	SN74HC14N	T.I.	Hex Inverter Schmitt Trigger	14P/DIP	2-6V	-40~85°C
42850	SN74HC14NSR	T.I.	HEX SCHMITT-TRIGGER INVERTERS	sop-14	2-6v	∅40 °C to 85 °C
19259	SN74HC151N	T.I.	LOGIC IC	DIP		
43014	SN74HC151PWR	T.I.	8-LINE TO 1-LINE DATA SELECTORS/MULTIOLEXERS	TSSOP-16	2-6V	∅40°C to 85°C
22249	SN74HC154N	T.I.	4-to-16 Line Decoder	24P/PDIP	2-6V	-40 - 85 °C
19260	SN74HC161	T.I.	LOGIC IC	DIP		
34581	SN74HC163N	T.I.	4-BIT SYNCHRONOUS BINARY COUNTERS	16P/DIP	2-6V	-40°C to 85°C
11329	SN74HC164D	T.I.	8-Bit Serial-In, Parallel-Out Shift Register	14P/SOIC	2-5.5V	-40~85°C
690	SN74HC164N	T.I.	8 Bit Serial-in Parallel-out Shift Register	14P/DIP	2-5.5V	-40~85°C
19261	SN74HC165	T.I.	8-bit parallel-in/serial-out shift register	16P/DIP	2-6V	
19262	SN74HC174N	T.I.	LOGIC IC	DIP		
22257	SN74HC192E	T.I.	High-Speed CMOS Logic Presettable Synchronous 4-Bit Up/Down Counters	16P/PDIP	-0.5~ 7V	-55 ~125°C
33803	SN74HC193N	T.I.	SYNCHRONOUS UP/DOWN BINARY COUNTER	DIL16	2-6V	-40~85°C
33567	SN74HC20N	T.I.	DUAL 4-INPUT POSITIVE-NAND GATES	14P/DIP	-0.5 V to 7 V	-40°C to 85°C.
32661	SN74HC240DW	T.I.	OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS	20P/SMD	2-6V	-40 to 85 °C
34579	SN74HC241N	T.I.	OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS	20P/DIP	2-6V	-40°C to 85°C
700	SN74HC243N	T.I.	Quad. Bus Transceivers with non-inverted 3-state outputs	14P/DIP	2-6V	-40~85°C
42853	SN74HC244DBLE	T.I.	Octal 3-STATE Buffer	20P/SSOT	2-6V	-40~85°C
23616	SN74HC244DWR	T.I.	Octal 3-STATE Buffer	20P/SOIC	2-6V	97°C
23891	SN74HC244N	T.I.	Octal 3-STATE Buffer	20P/DIP	2-6V	-40~85°C
42852	SN74HC245ADB	T.I.	OCTAL BUS TRANSCEIVERS WITH 3-STATE OUTPUTS	20P/TSSOP	2-6V	-40~85°C

