


## Logic IC

74AC/ACT~ Advanced CMOS  
Logic FamiliesDetailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)

Part No.	Product No.	Manufacturer	Description	Pins/Package	Vcc(Supply voltage)	Operating Temp
32250	74ACT174PC	Fairchild	Hex D-Type Flip-Flop with Master Reset	16P/DIP	4.5V to 5.5V	40°C to +85°C
32248	74ACT174SC	Fairchild	Hex D-Type Flip-Flop with Master Reset	16/SOIC	4.5V to 5.5V	40°C to +85°C
32234	74ACT175PC	Fairchild	high-speed quad D-type flip-flop	16P/DIP	4.5V to 5.5V	40°C to +85°C
32245	74ACT175SC	Fairchild	high-speed quad D-type flip-flop	16/SOIC	4.5V to 5.5V	40°C to +85°C
22180	74ACT240P		Line Driver with TRI-STATE	20P/SOIC	3.3V, 4.5V, 5.5V	-40°C ~85 °C
32232	74ACT244PC	ON-Semi.	Octal Buffer/Line Driver with 3-STATE Outputs	20P/DIP	4.5V to 5.5V	40°C to +85°C
35622	74ACT244SCX	ON-Semi.	Octal Buffer/Line Driver with 3-STATE Outputs	20P/SOIC	4.5V to 5.5V	-40~85°C
35624	74ACT244SJ	Fairchild	Octal Buffer/Line Driver with 3-STATE Outputs	20P/SOP	4.5V to 5.5V	-40~85°C
35616	74ACT245SC	Fairchild	Octal Bidirectional Transceiver with 3-STATE Inputs/Outputs	20P/SOIC	4.5V to 5.5V	-40°C to +85°C
31571	74ACT299	Fairchild	8-Input Universal Shift/Storage Register	20P/DIP	-0.5V to +7.0V	-40°C to +85°C
39599	74HCT04N	PHILIPS	Hex Inverter	DIP/14P	4.5~5.5V	-40 to +125 °C
32811	CD74AC32M	T.I.	Quad 2-Input OR Gate	14 Ld SOIC	-0.5V to 6V	-55 to 125 °C
32813	CD74ACT05M	T.I.	Hex Inverters	14 Ld SOIC	5 V	-55 to 125 °C
32816	CD74ACT138M	T.I.	3-to-8-Line Decoders/Demultiplexers	16 Ld SOIC	5V	0 to 70°C , -40 to 85°C , -55 to 125°C
32817	CD74ACT161M	T.I.	4-BIT SYNCHRONOUS BINARY COUNTERS	16P/SOIC	4.5-5.5V	-40°C to 85°C
6397	HD74AC244D	HITACHI	Octal Buffer/Line Driver with 3-STATE Outputs	20P/SOIC(208mil)	2-6V	40~85°C
42047	MC74AC04DR2	ON-Semi.	Hex Inverter	SOIC14	-0.5~70V	?65 to+150°C
42048	MC74AC05DR2G	ON-Semi.	Hex Inverter Open-Drain	SOIC14		
35214	MC74AC139D	ON-Semi.	Dual 1-of-4 Decoder/Demultiplexer	16P/SOIC	5.0V	-40~85°C
42049	MC74AC14DR2	ON-Semi.	Hex Inverter Schmitt Trigger	SOIC-14		
42051	MC74AC74DR2	ON-Semi.	Dual D-Type Positive Edge Trigger	SOIC-14		
42053	MC74AC86DR2	ON-Semi.	Quad 2-Input Exclusive OR Gate	SOIC-14		
42061	MC74ACT02DTR2	ON-Semi.	Quad 2-Input NOR Gate	TSSOP-14	5.5V	
42063	MC74ACT125DTR2	ON-Semi.	Quad Buffer with 3-State Outputs	TSSOP-14	5.5V	
42064	MC74ACT138DR2	ON-Semi.	1-of-8 Decoder/Demultiplexer	SOIC-16	5.5V	
35216	MC74ACT14D	ON-Semi.	Hex Inverter Schmitt Trigger	14P/SOIC	5.0V	-40~85°C
22174	MM74AC08PC	N.S	The AC/ACT08 contains four, 2-input AND gates.	14P/PDIP	4.5V, 5.5V	-40°C~85°C
22175	MM74AC244PC	N.S	bus-oriented transmitter/receiver which provides improved PC board density	20P/PDIP	4.5V, 5.5V	-40°C~85°C
22181	MM74ACTQ16373SCSX		16-Bit Transparent Latch with TRI-STATE	48P/SSOP	4.5V, 5.5V	-40°C ~85 °C
22182	MM74ACTQ245SSCX		Quiet Series Octal Bidirectional Transceiver with TRI-STATE	20P/DIP	4.5V, 5.5V	-40°C~85°C
22183	MM74ACTQ373PC		Quiet Series Octal Transparent Latch with 3-STATE Outputs	20P/PDIP	4.5V, 5.5V	-40°C~85°C
22184	MM74ACTQ374PC		Quiet Series Octal D-Type Flip-Flop with 3-STATE Outputs	20P/PDIP	4.5V, 5.5V	-40°C~85°C
13182	SN74AC00N	T.I.	Quad 2-Input NAND Gate	14P/DIP	2-6V	-40~85°C
13214	SN74AC04DBLE	T.I.	Hex Inverters	14P/SSOP	2-6V	-40~85°C
33720	SN74AC04N	T.I.	Hex Inverters	14P/DIP	2-6V	-40~85°C
48254	SN74AC08N	T.I.	Quadruple 2-Input Positive-AND Gates	14P/DIP	2-6V	-40°C~85°C
13170	SN74AC11004DB	T.I.	HEX INVERTER	20P/SOIC	3-5.5V	-40~85°C
13177	SN74AC11N	T.I.	2-6Vcc Triple 3-Input Positive-And Gates(Triple 3-input AND gate high-performance silicon-gate CMOS)	14P/DIP	4.5~5.5V	-40~85°C
13174	SN74AC240N	T.I.	2-6Vcc Octal Buffers/Drivers W/3-State Outputs(Octal Buffer/Line Driver with 3-STATE Outputs)	20P/DIP	2-6V	-40~85°C
13180	SN74AC241N	T.I.	Octal Buffer/Line Driver with 3-STATE Outputs	20P/DIP	4.5~5.5V	0~70°C
13178	SN74AC244N	T.I.	Octal Buffer/Line Driver with 3-STATE Outputs	20P/DIP	2-6V	0~70°C
13176	SN74AC245N	T.I.	Octal Bidirectional Transceiver with 3-STATE	20P/DIP	2-6V	-40~85°C
13181	SN74AC573N	T.I.	2-6Vcc Octal D-Type Transparent Latches W/3-State Outputs(Octal Latch with 3-STATE Outputs)	20P/DIP	2-6V	-40~85°C
13208	SN74AC74DBLE	T.I.	DUAL POSITIVE-EDGE-TRIGGERED D-TYPE FLIP-FLOPS WITH CLEAR AND PRESET	14P/SOP	2-6V	-40~85°C
13183	SN74AC74N	T.I.	Dual D-Type Positive Edge-Triggered Flip-Flop	14P/DIP	2-6V	-40~85°C
42580	SN74AC86PWR	T.I.	QUADRUPLE 2-INPUT EXCLUSIVE-OR GATES	14PIN/Thin Shrink Small-Outline	6V	-65°C to 150°C
33719	SN74ACT00N	T.I.	QUADRUPLE 2-INPUT POSITIVE-NAND GATES	14P/DIP	4.5-5.5V	-40~85°C
47892	SN74ACT04DR	T.I.	Hex Inverters	14P/SOIC	4.5-5.5V	-40~85 °C
20576	SN74ACT04N	T.I.	Hex Inverters	14P/DIP	4.5-5.5	-40~85 °C
42581	SN74ACT04PWR	T.I.	Hex Inverters	14P/Thin Shrink Small-Outline	4.5-5.5	-40~85 °C

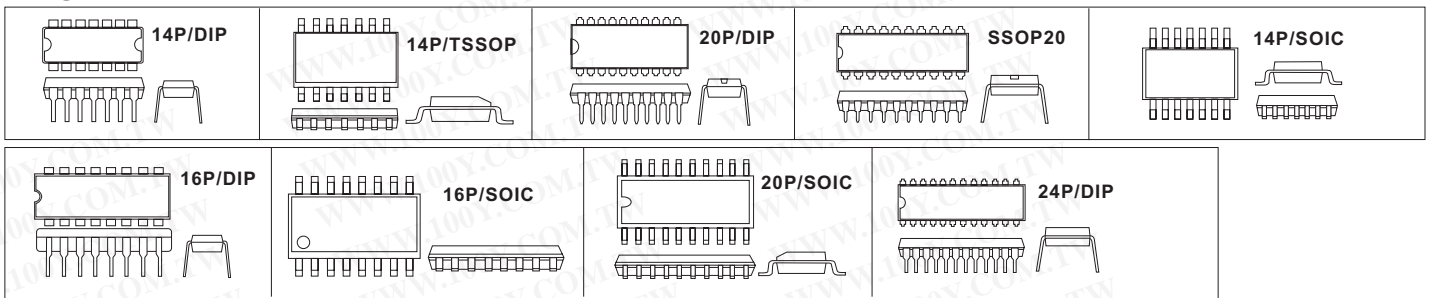