


# Logic IC

## Other 74~Families

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)

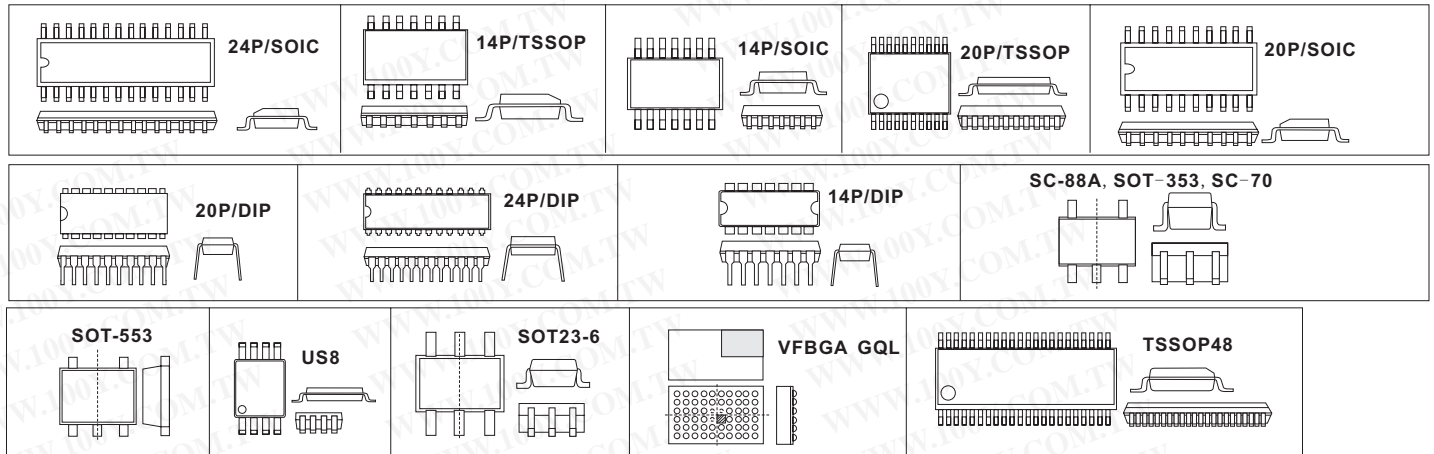

Part No.	Product No.	Manufacturer	Description	Pins/Package	Vcc(Supply voltage)	Operating Temp
42694	SN74ALVCH16244DGGR	T.I.	16-BIT BUFFER/DRIVER WITH 3-STATE OUTPUTS	TSSOP-48	3.6V	-40°C to 85°C
42695	SN74ALVCH245PWR	T.I.	OCTAL BUS TRANSCEIVER WITH 3-STATE OUTPUTS	TSSOP-20	3.6V	-40°C to 85°C
48255	SN74AS244N	T.I.	Octal Buffers And Line Drivers With 3-State Outputs	20P/DIP	4.5-5.5V	0°C-70°C
22219	SN74AS257N	T.I.	3-STATE Quad 1 of 2 Line Data Selector/Multiplexers	16P/PDIP	4.5-5.5V	0°C-70°C
22222	SN74AS74N	T.I.	DUAL POSITIVE-EDGE-TRIGGERED D-TYPE FLIP-FLOPS WITH CLEAR AND PRESET	14P/DIP	7V	0°C-70°C
42696	SN74AVCAH164245KR	T.I.	16-BIT DUAL-SUPPLY BUS TRANSCEIVER WITH CONFIGURABLE VOLTAGE TRANSLATION AND 3-STATE OUTPUTS	VFBGA - GQL	3.6V	-40°C to 85°C
42716	SN74AVCAH164245VR	T.I.	16-BIT DUAL-SUPPLY BUS TRANSCEIVER WITH CONFIGURABLE VOLTAGE TRANSLATION AND 3-STATE OUTPUTS	TVSOP - DGV	3.6V	-40°C to 85°C
42715	SN74AVCB164245KR	T.I.	16-BIT DUAL-SUPPLY BUS TRANSCEIVER WITH CONFIGURABLE VOLTAGE TRANSLATION AND 3-STATE OUTPUTS	VFBGA ? GQL	4.6V	?40°C to 85°C
42730	SN74AVCBH324245KR	T.I.	32-BIT DUAL-SUPPLY BUS TRANSCEIVER WITH CONFIGURABLE VOLTAGE TRANSLATION AND 3-STATE OUTPUTS	LFBGA - GKE	4.6v	-40°C to 85°C
13203	SN74CBT16212ADL	T.I.	24-BIT FET BUS-EXCHANGE SWITCHES	56P/SSOP	4-5.5V	-40-85°C
42776	SN74CBT3125DBQR	T.I.	QUADRUPLE FET BUS SWITCH	SSOP (QSOP) - DBQ	-0.5 V to 7 V	-40°C to 85°C
42769	SN74CBT3245ADBR	T.I.	OCTAL FET BUS SWITCH	SSOP - DB	-0.5 V to 7 V	-40°C to 85°C
42731	SN74CBT3257DR	T.I.	4-BIT 1-OF-2 FET MULTIPLEXER/DEMUTIPLEXER	SOIC - D	5.5V	-40 °C to 85 °C
42732	SN74CBT3257PWR	T.I.	4-BIT 1-OF-2 FET MULTIPLEXER/DEMUTIPLEXER	TSSOP - PW	5.5v	-40 °C to 85 °C
42771	SN74CBT3384APWR	T.I.	10-BIT FET BUS SWITCH	TSSOP - PW	-0.5 V to 7 V	-40 °C to 85 °C
42772	SN74CBT3861DWR	T.I.	10-BIT FET BUS SWITCH	SOIC DW	-0.5 V to 7 V	-40 °C to 85 °C
42773	SN74CBTD3306PWR	T.I.	DUAL FET BUS SWITCH WITH LEVEL SHIFTING	TSSOP - PW	-0.5 V to 7 V	-40 °C to 85 °C
42785	SN74CBTD3384PWR	T.I.	10-BIT FET BUS SWITCH	TSSOP - PW	-0.5 V to 7 V	-40 °C to 85 °C
42791	SN74CBTD3861DWR	T.I.	10-BIT FET BUS SWITCH	SOIC DW	-0.5 V to 7 V	-40 °C to 85 °C
42794	SN74CBTLV1G125DCKR	T.I.	LOW-VOLTAGE SINGLE FET BUS SWITCH	SOT (SC-70)- DCK	-0.5 V to 4.6 V	-40°C to 85°C
42795	SN74CBTLV3125DBQR	T.I.	LOW-VOLTAGE QUADRUPLE FET BUS SWITCH	SSOP (QSOP)- DBQ	-0.5 V to 4.6 V	-40 °C to 85 °C
42796	SN74CBTLV3125PWR	T.I.	LOW-VOLTAGE QUADRUPLE FET BUS SWITCH	TSSOP - PW	-0.5 V to 4.6 V	-40 °C to 85 °C
42801	SN74CBTLV3126DBQR	T.I.	LOW-VOLTAGE QUADRUPLE FET BUS SWITCH	SSOP (QSOP) - DBQ	-0.5 V to 4.6 V	-40 °C to 85 °C
42802	SN74CBTLV3126DR	T.I.	LOW-VOLTAGE QUADRUPLE FET BUS SWITCH	SOIC - D	-0.5 V to 4.6 V	-40 °C to 85 °C
42803	SN74CBTLV3253PWR	T.I.	LOW-VOLTAGE DUAL 1-OF-4 FET MULTIPLEXER/DEMUTIPLEXER	TSSOP - PW	-0.5 V to 4.6 V	-40°C to 85°C
44843	SN74CBTLV3257D	T.I.	LOW-VOLTAGE 4-BIT 1-OF-2 FET MULTIPLEXER/DEMUTIPLEXER	16P-SOIC	-0.5 V to 4.6 V	-40°C to 85°C
42805	SN74CBTLV3257DBQR	T.I.	LOW-VOLTAGE 4-BIT 1-OF-2 FET MULTIPLEXER/DEMUTIPLEXER	SSOP (QSOP)- DBQ	-0.5 V to 4.6 V	-40°C to 85°C
42806	SN74CBTLV3257PWR	T.I.	LOW-VOLTAGE 4-BIT 1-OF-2 FET MULTIPLEXER/DEMUTIPLEXER	TSSOP - PW	-0.5 V to 4.6 V	-40 °C to 85 °C
42807	SN74CBTLV3384DBQR	T.I.	LOW-VOLTAGE 10-BIT FET BUS SWITCH	QSOP - DBQ	-0.5 V to 4.6 V	-40 °C to 85 °C
34017	SN74LV595APWR	T.I.	8-BIT SHIFT REGISTERS WITH 3-STATE OUTPUT REGISTERS	16P/TSSOP	2V-5.5V	-40°C to 85°C
13215	SN74LVC02AD	T.I.	Quad 2-input NOR gate	14P/SOIC	2.7-3.6V	-40-85°C
15567	SN74LVC04AD	T.I.	Hex inverter	14P/SOIC	2.7-3.6V	-40-85°C
21955	SN74LVC08ADR	T.I.	Quad 2-input Positive-AND gate	14P/SOIC	1.65 V to 3.6V	-40-125°C
44467	SN74LVC08APW	T.I.	Quadruple 2-Input Positive-AND Gate	14P/TSSOP(PW)	1.65-3.6V	-40-85°C
49293	SN74LVC125ADR	T.I.	Quadruple Bus Buffer Gate With 3-State Outputs	14P/SOIC	1.65-3.6V	-40°C to +125°C
42876	SN74LVC125APW	T.I.	Quadruple Bus Buffer Gate With 3-State Outputs	14P/TSSOP	1.65-3.6V	-40°C to +125°C
17071	SN74LVC14ADR	T.I.	HEX SCHMITT-TRIGGER INVERTERS	14P/SOIC(SOT108-1)	1.65-3.6V	-40-85°C
16974	SN74LVC157APWLE	T.I.	QUADRUPLE 2-LINE TO 1-LINE DATA SELECTORS/MULTIPLEXERS	16P/TSSOP	1.65-3.6V	-40-85°C
16973	SN74LVC16244DGG	T.I.	16-BIT BUFFER/DRIVER WITH 3-STATE OUTPUTS	48P/TSSOP	1.65-3.6V	-40-85°C
16972	SN74LVC16245ADGGR	T.I.	16-BIT BUS TRANSCEIVER WITH 3-STATE OUTPUTS	48P/TSSOP	1.65-3.6V	-40-85°C
43688	SN74LVC1G32DCK	T.I.	SINGLE 2-INPUT POSITIVE-OR GATE	SOT-23	6.5V	-40°C to 85°C
17068	SN74LVC244ADW	T.I.	Octal buffer/line driver; 3-state	20P/SOIC (DW)	1.65-3.6V	-40-85°C
41130	SN74LVC2G14DBVR	T.I.	DUAL SCHMITT-TRIGGER INVERTER	SOT-23	5.5V	-40°C to 85°C

