


Sockets & Accessories

PCB Adaptors


Detailed product specifications are available on: us.100y.com.tw



ITEM NO.	ISO0010-TV32-00 (OPEN TOP)
PART NO.	18793
PRODUCT NO.	OTS-32-01 PCB-E
IC SIZE:	8.0*14.0
PITCH	0.5
REMARK	OTTS-32-0.5-01
SPECIFICATION	TSOP32pin



Part No.	Product No.	Manufacturer	Description	Pins	Suitable IC package
18793	OTS-32-0.5-01-PCB-E	COSTRONIC	IS0010-TV32-00(Open Top) FOR OTS-32-0.5-0.1 PCB-E	32P/0.5mm	TSOP

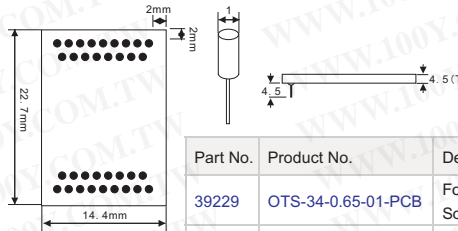

Part No.	Product No.	Description	Pins	Suitable IC package
39229	OTS-34-0.65-01-PCB	For OTS-34-0.65-01 Socket PCB	34Pins 0.65mm	SSOP
39228	P-OTS-34-0.65-01-S	Adapter	34	



Part No.	Product No.	Description	Pins	Suitable IC package	Size
8057	RFP100MC	RFP(0.65mm Pitch) to DIP PCB Adaptor	100Pins		
14065	RFP128L	RFP 0.5mm PITCH PCB Adaptor	128Pin		56*52*1.6mm
7493	RFP640C	RFP64Pins P:1.0mm PCB	64Pins		39*37*1.0mm
8056	RFP84NC	RFP(0.8mm Pitch) to DIP PCB Adaptor	42-84Pins	RFP42-84P/0.8mm	49*47*1.6(mm)

IC Lead Setting Tool

Detailed product specifications are available on: us.100y.com.tw



- Easier, faster, hand-free testing.
- Easy attachment on high density PC boards.
- Lead channel makes probe steady without sliding off.

- With gold-plated pin for best contact.
- Compatible with connector.
- Simplifies prototype, production testing, field service work and quality control inspection.


Part No.	Product No.	Description
8553	ICS-01	IC Lead Setting Tool

SIMM Sockets

Detailed product specifications are available on: us.100y.com.tw



SPECIFICATIONS:
 Current rating: 1.0A AC, DC
 Voltage rating: 100V AC, DC
 Contact resistance: 30mΩ max
 Insulation resistance: 1000MΩ min
 Withstanding voltage: 500V AC/minute
 Temperature range: -25°C to +125°C

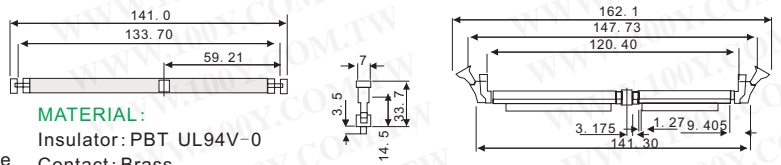

MATERIAL:
 Insulator: PBT UL94V-0
 Contact: Brass
 Finish: Gold plated

Part No.	Product No.	Description	Pins
17256	B57-1	DDR SOCKET CONN	2*92




- Single x 72-pin vertical
- Locking tabs
- Tinned contacts
- Memory module socket
- Keyed mounting posts

Part No.	Product No.	Description	Pins
4199	D29	SIMM Socket	1x72



SPECIFICATIONS:
 Current rating: 1.0A AC, DC
 Voltage rating: 100V AC, DC
 Contact resistance: 30mΩ max
 Insulation resistance: 1000MΩ min
 Withstanding voltage: 500V AC/minute
 Temperature range: -25°C to +125°C

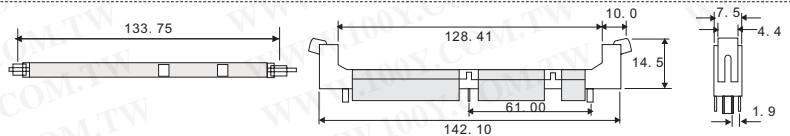

MATERIAL:
 Insulator: PBT UL94V-0
 Contact: Brass
 Finish: Gold plated

Part No.	Product No.	Description	Pins
4157	SIMM 30*2	SIMM Socket	30*2



T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail: Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai: 100y-1@163.com