
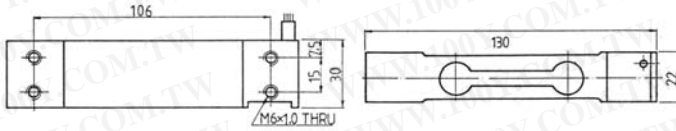


Sensors & Transducers

Strain Sensors Strain Sensors-Load Cells



Detailed product specifications are available on: us.100y.com.tw

MODEL	AAA	AAC
RATED OUTPUT	2.0mv/V 10%	
ZERO BALANCE	±5% OF R.O.	
CREEP ATRATED CAPACITY (20 Min)	0.015%	0.03% OF R.O.
NONLINEARITY HYSTERESIS AND REPEATABILITY	0.015%	0.03% OF R.O
INPUT IMPEDANCE	400 ohm ± 15 ohm	
OUTPUT IMPEDANCE	350 ohm ± 3 ohm	
TEMPERATURE COMPENSATED	-10°C TO 50°C	
SAFE OVERLOADING	1 1/2 X RATED CAPACITY	
RECOMMENDED EXCITATION	10V DC OR AC	
INSULATION RESISTANCE	> 2000 MEGOHMS	
CAPACITY	3. 6. 10. 12. 15. 20. 30. 35 KGS	

Part No.	Product No.	Description	Type	Rated Output	Zero Balance	Creep Atrated Cap.
22296	LOAD CELL-AAA-45kg	45kg With Prop Stands LOAD CELL	AAA	2.0mV/V 10%	+5% of R.O.	0.015%

Gas Sensors Gas Sensors

CHARACTER


Perfect design of single source double room structure by computer simulation;

- In approximate standard pressure, comparative 95% and below 40°C clean air, the shift amount of connection pole balance potential keeps at 5. 3-6. 3V, and can also applicable for different power and pressure, and its index various according to working pressure
- Radiation safety: single source, low source, low range, safety grade standard reaches to C64646 (GB40758-ISO2919)
- Use corrosive protection and high function plastic, palladium metal Am-241 and other high anticausticity material
- The basic shack and slot of ionization room is fitful to be installed in the upper part of IC. 15 connecting of IC and connection pole connection point get near and convenient for soldering and can effectively shield RF interference, meanwhile all the soldering point are coated with soldering tin previously so as to convenient for installation





Detailed product specifications are available on: us.100y.com.tw

Part No.	Product No.	Description
48896	DSC-Ja08	Catalog of general p

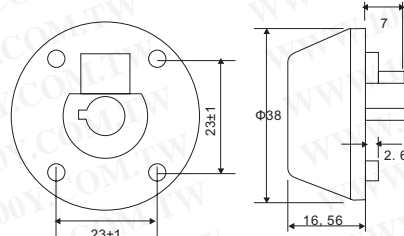

- Environmental temperature: 20±3°C
- Capacitance: 6pF
- Insulated leak current (Max): 0. 5pA

Part No.	Product No.	Description
23866	HIS-07	Smoke detector
31646	JAS-05A	Smoke detector

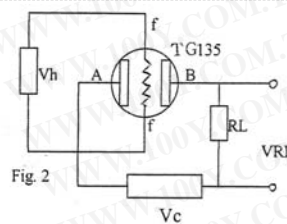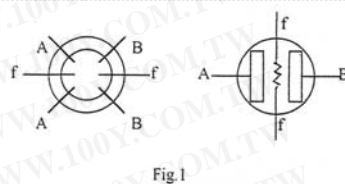

FEATURES:

- Long Life-span
- Wider detection range

Part No.	Product No.	Description
11447	TG-135	CO, Air Quality Sensor

MQ-SERIES HIGH-QUALITY GAS SENSORS IN VARIOUS MODELS FOR DIFFERENT GAS

Detailed product specifications are available on: us.100y.com.tw



FEATURES:

- High sensitivity to low concentrations
- Fast response
- Wide range of gas concentrations
- Simple drive circuit
- Large output change without amplifier
- Stable and long life
- Good reproducibility

APPLICATIONS

- Gas leak detection for fouses/workshops
- Air quality control for buildings/offices
- CO monitoring systems for building/plants
- Gas detection systems for buildings/plants
- Fire detection systems

