


# Soldering & Desoldering

## goot\_KS/KY/KX Series Soldering Iron + Accessories

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



Part No.	Product No.	Manufacturer	Description	Output power W	Solder Type	Suitable voltage	Handpiece (mm)	The head of cauterant length (mm)
47211	R-48A	Goot	Goot_Soldering Tip		KS/KX-20R, 30R, 40R			75mm
5950	R-48B	Goot	Soldering Iron Tip	25/30W	KS/KX/CA-20R,30R,40R	110V	0.5mm	75mm
10188	R-48BC	Goot	Soldering Iron Tip	20,30,40W	KX/KS/CA-20,25,30R		1.2mm	75mm
10208	R-48SB	Goot	Soldering iron Tip	20/30/40W	KS/KX/CA-20R, 30R, 40R		0.3mm	75 mm
10192	R-6B	Goot	Soldering Iron Tip	60W	KS/KX-60R		0.8mm	80mm
23534	RD-67BC	Goot	Soldering Iron Tip		KX/KS-100R		2.2mm	85mm
10194	RD-68BC	Goot	Soldering Iron Tip	100	KS-100R/KX-100(R)		2.5mm	90mm
10198	RD-68C	Goot	Soldering Iron Tip		KX/KS-100R		6mm	80mm



a: R0.6  
b: 17

MODEL	Replacement Tip shape	Dia. /Φmm	Length/mm	Applicable soldering irons
TD-68	B	6-8	90	KX-100

Part No.	Product No.	Manufacturer	Description	Solder Type	Handpiece (mm)	The head of cauterant length (mm)
23535	TD-68B	Goot	Soldering Iron Tip	KX/KS-100R	0.6mm	90mm

## goot\_PX,RX Series Soldering Station+ Accessories


Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)




Part No.	Product No.	Manufacturer	Description	Solder Type	Static-proof Y/N
48848	PARTS	Goot	FOR: RX-70H/711 accessory	RX-70H/711	Y
25748	PX-1N	Goot	Nut Spinner		



Voltage	110, 220—240V AC
Power Consumption	70W
Temperature Setting Range	250—450°C
Insulation Resistance 500V DC	Over 100MΩ
Dimensions	210(L)mm
Weight (w/o Power Cord)	86g
Power Cord Length	1.5m

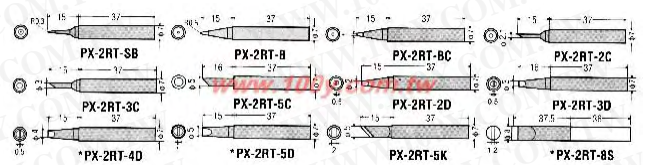

Part No.	Product No.	Manufacturer	Description	Output power W	Solder Type	Suitable voltage	The head of cauterant length (mm)	The range of control temperature °C	Static-proof Y/N	Weight
16889	PX-201	Goot	Temperature Soldering Iron	70W	R0.5(PX-2RT-B)	110-130V	210mm	250-450°C	Y	86g

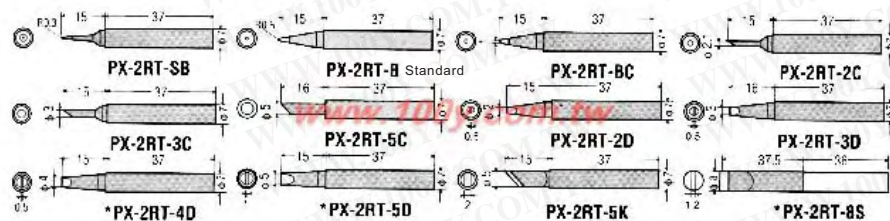

Part No.	Product No.	Manufacturer	Description	Solder Type	Handpiece (mm)	The head of cauterant length (mm)
44750	PX-2RT-2.4D	Goot	Soldering Iron Tip	PX-232/238/242, PX-201/251, SVS-500	2.4mm	52mm
10210	PX-2RT-2C	Goot	Soldering Iron Tip	PX-2/3, SVS-500	2.1mm	52mm
10211	PX-2RT-2D	Goot	Soldering Iron Tip	PX-2/3 Series	2mm	52mm
44751	PX-2RT-8S	Goot	Soldering Iron Tip	PX-232/238/242	8mm	73.5mm
44749	PX-2RT-B	Goot	Soldering Iron Tip	PX-232/238/242, PX-201/251, SVS-500	R0.5	52mm
46063	PX-2RT-BC	Goot	Goot_Soldering Tip	PX-232/238/242, PX-201/251AS, SVS-500	1mm	
16679	PX-2RT-SB	Goot	Soldering Iron Tip	PX-2/3, SVS-500	R0.3	52mm

- We provide a wide range of products to development and maintenance engineers in all type of business
- If you cannot find the components you want on the catalogue, please call us.

Taiwan: 886-3-5753170  
Shanghai: 021-54151736 Shenzhen: 0755-83298787

**Centenary Materials**  
Waiting for your phone call



T E L : Taiwan: 886-3-5753170  
F A X : Taiwan: 886-3-5753172  
E-mail: Taiwan: [us\\_sale@100y.com.tw](mailto:us_sale@100y.com.tw)

Shenzhen: 86-755-83298787  
Shenzhen: 86-755-83640655  
Shenzhen: [100y@163.com](mailto:100y@163.com)

Shanghai: 86-21-54151736  
Shanghai: 86-21-64605107  
Shanghai: [100y-1@163.com](mailto:100y-1@163.com)