


Soldering & Desoldering

HAKKO_Soldering + Available Tip Shape

Detailed product specifications are available on: us.100y.com.tw

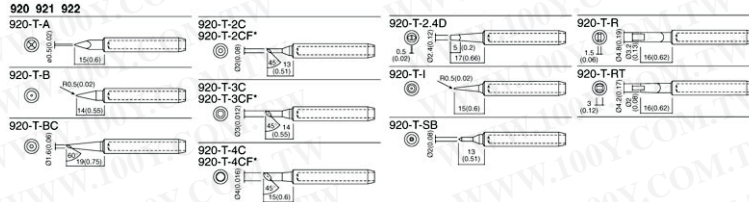

Part No.	Product No.	Manufacturer	Description	Output power W	Solder Type	Length(mm)	Suitable voltage	Static-proof Y/N	The range of control temperature °C
44096	HAKKO 920	HAKKO	Soldering Tip	85	920	210mm	120V	Y	300



Part No.	Product No.	Manufacturer	Description	Output power W	Weight	The range of control temperature °C
29046	HAKKO-484	HAKKO	Desoldering tool	12W	2.5kg	370°C



Part No.	Product No.	Manufacturer	Description	Output power W	Length(mm)	Suitable voltage	Static-proof Y/N	Weight
34622	HAKKO-908ESD	HAKKO	936 Series Soldering Iron Pencil	50W	200mm	24VAC	Y	54g



- Compact unit; takes up little space on the workbench.
- Soldering irons have thinner grips for easier use.
- Lock screw prevents inadvertent changes to the temperature setting.
- ESD safe by design.

SPECIFICATIONS

Station	
Temperature	200°C—480°C (392°F—896°F)
Temperature Stability	±1.0°C (1.8°F)
Outer Dimensions(w/o cord)	120 (W) x 93 (H) x 170 (D) mm 4.7 (W) x 3.7 (H) x 6.7 (D) in.
Weight(w/o cord)	Approx. 1.3 kg (2.9 lbs)

Part No.	Product No.	Manufacturer	Description	Output power W	Solder Type	Length(mm)	Suitable voltage	Static-proof Y/N	Weight	The range of control temperature °C
7699	HAKKO-936-110V	HAKKO	Temperature Soldering Iron	60W		190mm	110V	No	1.3kg	200°C~480°C
7355	HAKKO-936-ESD-110V	HAKKO	ESD Temperature Controlled Soldering Iron	60W	907-ESD	190mm	110V	Yes	1.3kg	200°C~480°C
33579	HAKKO-936-ESD-220V	HAKKO	ESD Temperature Controlled Soldering Iron	60W	907-ESD	190mm	220V	Yes	1.3kg	200? ~480?




- Available for your HAKKO 936, 937, 939, 702, 703, 926, 927, 928, stations.
- Direct heating - less effect upon surrounding components on crowded boards.
- Easily removes SMD chips and flat packs up to 25mm.
- The collet allows easy replacement of the tips.
- Specially designed tool allows easy and precise tip alignment.


Specifications

Standard Tip	2mm (P/N: A1378)
Temperature	200°C-400°C (392°F-752°F)
Tip to Ground Resistance	Under 2 Ω
Tip to Ground Potential	Under 2mV (Typ. 0.6mV)
Heating Element	Ceramic heater

Part No.	Product No.	Manufacturer	Description	Output power W	Solder Type	Handpiece (mm)	Length(mm)	Suitable voltage	Static-proof Y/N	The range of control temperature °C
43009	HAKKO-950-ESD-SAFE	HAKKO	HAKKO_950 SMD Desoldering Iron Tweezer	50W	950	2	186	AC24V	Y	200-400



Part No.	Product No.	Manufacturer	Description	Solder Type	Handpiece (mm)	Static-proof Y/N
48163	N452-T-2C	HAKKO	HAKKO_Soldering Iron Tip For: N452,N453	N452,N453	17mm	N

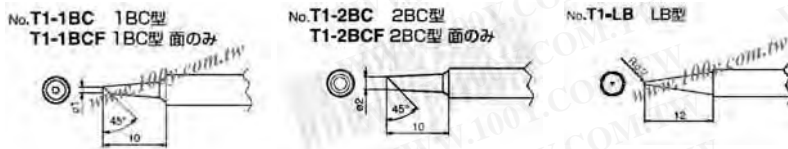

Part No.	Product No.	Manufacturer	Description	Output power W	Solder Type	Handpiece (mm)	Length(mm)	Suitable voltage	Weight	The range of control temperature °C
41745	T1-1BC	HAKKO	Soldering Iron	70w	HAKKO 941	1mm	188mm	24v	30g	200 to 450°C
41747	T1-2BC	HAKKO	Soldering Iron	70w	HAKKO 941	2mm	188mm	24v	30g	200 to 450°C
41746	T1-LB	HAKKO	Soldering Iron	70w	HAKKO 941	2mm	188mm	24v	30g	200 to 450°C

