

Soldering & Desoldering

Weller_Soldering Equipment + Available Tip Shape

Detailed product specifications are available on: us.100y.com.tw



Seal stage
 Power: 95W
 Working voltage: 220V 50Hz, Output 24V
 Temperature range: 50oC-450oC
 Temperature Security: ±2%

Seal stock
 Power: 80W
 Wire length: 1. 22M

Part No.	Product No.	Manufacturer	Output power W	The range of control temperature °C	Static-proof Y/N	Suitable voltage	Description
27793	WSD81	Weller	80W	150-450°C	No	110Vac	Weller_Silver Series Soldering Station



Applications:

•Production, rework, and repair of through hole and SMT boards. Some ground planes and multi-layer boards. Repetitive soldering at a consistent temperature.


Additional Product Features and Benefits:

- A lighted rocker switch indicates on/off status
- Quick disconnect plug for soldering iron allows fast iron change
- PT series tips are available in three standard temperature ranges: 600°F, 700°F, 800°F. See page 13
- Power unit features impact resistant plastic for durability
- ESD safe to protect sensitive components
- UL and cUL listed

Part No.	Product No.	Manufacturer	Output power W	Solder Type	The range of control temperature °C	Weight	Suitable voltage	Description
28871	WTCPT	Weller	60W	TC201T	316-427°C	1.78kg	120V	Weller_WTCPT Temperature Controlled Soldering Station

XYTRONIC_Soldering Equipment Series XYTRONIC_SMD Soldering Station + Available Tip Shape

Detailed product specifications are available on: us.100y.com.tw

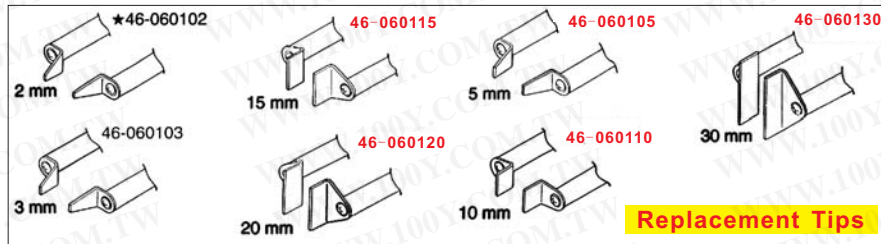

Part No.	Product No.	Manufacturer	Description	Solder Type	Handpiece (mm)
15858	46-060102		Desoldering Attachment For 236	236 , TWZ50 , TWZ60	2mm
16292	46-060103		Desoldering Attachment For 236	236 , TWZ50 , TWZ60	3mm
11405	46-060105	XYTRONIC	Desoldering Attachment For 236	236 , TWZ50 , TWZ60	5mm
11406	46-060110	XYTRONIC	Desoldering Attachment For 236	236 , TWZ50 , TWZ60	10mm
11407	46-060115	XYTRONIC	Desoldering Attachment For 236	236 , TWZ50 , TWZ60	15mm
11408	46-060120	XYTRONIC	Desoldering Attachment For 236	236 , TWZ50 , TWZ60	20mm
12773	46-060130		Desoldering Attachment For 236	236 , TWZ50 , TWZ60	30mm



FEATURES:

- Provide a fast, efficient method to solder and desolder Surface Mount Devices.
- Integrates two highly insulated, maximum efficiency ceramic elements to insure rapid heat up and recovery.
- Light, compact, portable and economical
- Wide range of standard tips available
- Custom tips available upon request

Model	236	226
Input	100-120 Va. c.	220-240Va. c.
Heater Power	25W x 2	20W x 2
Max. temperature	480°C (W/*tip) 896°F (w/*tip)	430°C (w/*tip) 806°F (w/*tip)
Standard tip	*46-060102 (2mm)	

Part No.	Product No.	Manufacturer	Description	Output power W	Length(mm)	The range of control temperature °C	Suitable voltage	Weight (g)
39627	226	XYTRONIC	SMD Desoldering Iron Tweezers		205mm		220V	
3178	236-110V	XYTRONIC	SMD Desoldering Iron Tweezers	40W	205mm	420°C	110V	250g
40073	236-220V	XYTRONIC	SMD Desoldering Iron Tweezers	40W	205mm	420°C	220V	



Part No.	Product No.	Manufacturer	Description	Output power W	Length(mm)	Suitable voltage	Weight (g)
40086	428-110V	XYTRONIC	428-110V Air Cooler	22w	200*90*255	110V	1.3Kgs
40087	428-220V	XYTRONIC	428-220V Air Cooler	22W		220V	1.3Kgs



T E L : Taiwan: 886-3-5753170
 F A X : Taiwan: 886-3-5753172
 E-mail: Taiwan: us_sale@100y.com.tw

Shenzhen: 86-755-83298787
 Shenzhen: 86-755-83640655
 Shenzhen: 100y@163.com

Shanghai: 86-21-54151736
 Shanghai: 86-21-64605107
 Shanghai: 100y-1@163.com