
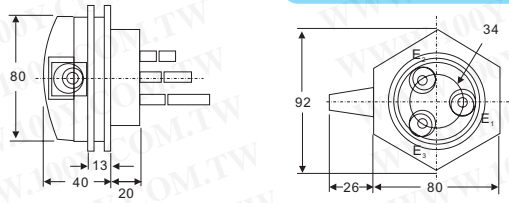


# Inductors & Filters

## Electrode protector + Accessory


Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



Part No.	Product No.	Manufacturer	Description	SPEC	Working temperature	Weight
49930	F03-12	OMRON	Fixer - For:PS-3S(R)	φ112*10mm	-10~+70°C	80g
50184	PS-3S(R)	OMRON	PS-3S(R) Electrode Holders	Φ80*60mm*3poles	-10~+70°C	155g

## EMI/EMC Filters IEC Inlet Filters

Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)

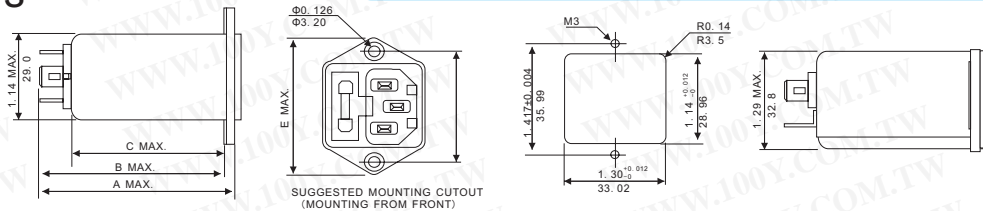

SUGGESTED MOUNTING CUTOUT (MOUNTING FROM FRONT)


### SPECIFICATIONS

- Maximum leakage current each line-to-ground@115VAC 60Hz: 0.25mA @250VAC 50Hz: 0.45mA
- Hipot rating (one minute) line-to-ground:2250VDC line-to-line:1450VDC
- Operating frequency:50/60Hz
- Rated voltage: 115/250VAC

### INTRODUCTIONS

- Designed as a general purpose filter with a fuse holder providing effective EMI suppression for both common and differential mode noise.
- All part numbers are UL recognized, CSA certified and VDE approved.

Part No.	Product No.	Manufacturer	Description	Current (Amp)	Vol.
49506	02BEEG3H	DELTA	FUSE CONNECTOR FILTERS	2A	115/250V
49507	04BEEG3H	DELTA	FUSE CONNECTOR FILTERS	4A	115/250V
49510	06BEEG3G	DELTA	SWITCH CONNECTOR FILTERS	6A	115/250V

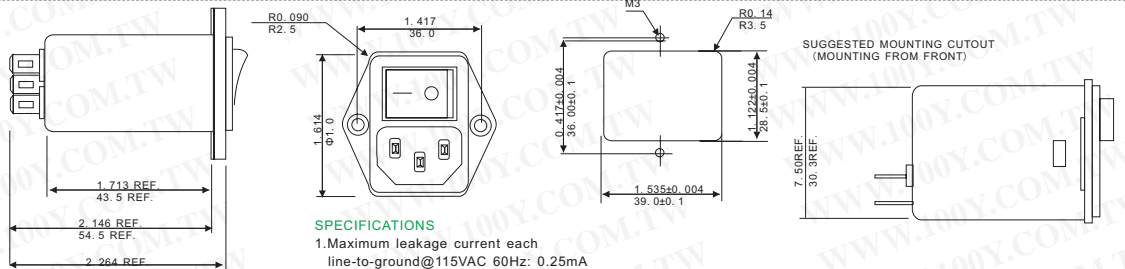


### SPECIFICATIONS

- Maximum leakage current each line-to-ground@115VAC 60Hz: 0.25mA @250VAC 50Hz: 0.45mA
- Hipot rating (one minute) line-to-ground:2250VDC line-to-line:1450VDC
- Operating frequency:50/60Hz
- Rated voltage: 115/250VAC

### INTRODUCTIONS

- Designed as a general purpose filter with a switch effective EMI suppression for both common and differential mode noise.
- With optional resistor and 3300pF/1000pF

Part No.	Product No.	Manufacturer	Description	Current (Amp)	Vol.
49508	03BEEG3G	DELTA	SWITCH CONNECTOR FILTERS	3A	115/250V
49509	03BEEG3G-R	DELTA	SWITCH CONNECTOR FILTERS	3A	115/250V
49511	06BEEG3G-R	DELTA	SWITCH CONNECTOR FILTERS	6A	115/250V
49512	10BEEG3G	DELTA	SWITCH CONNECTOR FILTERS	10A	115/250V
49513	10BEEG3G-R	DELTA	SWITCH CONNECTOR FILTERS	10A	115/250V

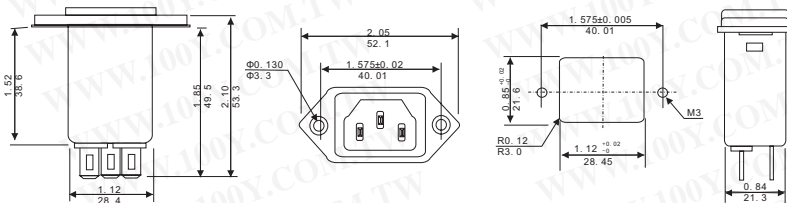

### SPECIFICATIONS

- Maximum leakage current each line-to-ground@115VAC 60Hz: 0.25mA @250VAC 50Hz: 0.45mA
- Hipot rating (one minute) line-to-ground:2250VDC line-to-line:1450VDC
- Operating frequency:50/60Hz
- Rated voltage: 115/250VAC

Part No.	Product No.	Manufacturer	Description	Current (Amp)	Vol.
48723	03GEEG3E-STD	DELTA	AC Series Power Line Filter	3A	115/250V
48867	06GEEG3E-R-STD	DELTA	AC Series Power Line Filter	6A	250V
48724	06GEEG3E-STD	DELTA	AC Series Power Line Filter	6A	250V
48725	10GEEG3E-STD	DELTA	AC Series Power Line Filter	10A	115/250V

