

# Inductors & Filters

## Chassis Mounting Filters



Detailed product specifications are available on: [us.100y.com.tw](http://us.100y.com.tw)



**Character**

- Maximum leakage current line-to-ground  
 @ 115VAC 60Hz: 0.25mA  
 @ 250VAC 50Hz: 0.45mA
- Hipot rating (one minute)  
 line-to-ground:2250VDC  
 DCline-to-line:1450VDC

- Power line frequency: 50/60HZ
- Rating voltage: 115/250VAC



Part No.	Product No.	Manufacturer	Description	Rated Vol.	Current (Amp)
48737	20DRGG5	DELTA	IEC INLET FILTERS	115/250V	20A



**ELECTRICAL CHARACTERISTICS:**

- Voltage rating: 115/250VAC  
 Current rating:  
 A. AT 115VAC: 10 A RMS Max.  
 B. AT 250VAC: 10 A RMS Max.  
 Operating frequency: 50/60 Hz  
 Leakage current: each line to ground  
 A. @115VAC 60Hz: 0.25 mA Max  
 B. @250VAC 50Hz: 0.45 mA Max.

**HiPOT RATING (FOR ONE MINUTE)**

- A: LINE TO GROUND: 2250VDC  
 B: LINE TO LINE: 1450VDC  
 Temperature range: -25 to +100 degree C  
 Minimum insertion loss IN dB: (AT 50 OHM SYSTEM)

Part No.	Product No.	Manufacturer	Description	Rated Vol.	Current (Amp)
50477	10DBAW5	DELTA	DB Series GENERAL PURPOSE FILTER	115/250VAC	10A




CW3-03A-T




CW3-10A-T

**Character:**

- Maximum leakage current line-to-ground  
 @ 115VAC 60Hz: 0.25mA  
 @ 250VAC 50Hz: 0.45mA
- Hipot rating (one minute)  
 line-to-ground:2250VDC  
 DCline-to-line:1450VDC
- Power line frequency: 50/60HZ
- Rating voltage: 115/250VAC
- Operating temperature: -25~85°C

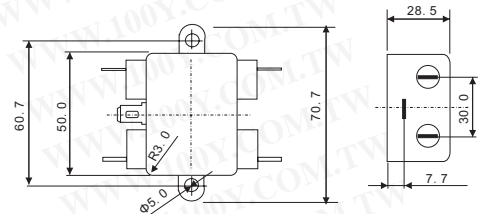


Part No.	Product No.	Description	Rated Vol.	Current (Amp)
40099	CW3-03A-T	AC Series EMI Power Line Filter	115/250V	3A
40941	CW3-10A-T	AC Series EMI Power Line Filter	115/250V	10A



**Character:**

- Maximum leakage current line-to-ground  
 @ 115VAC 60Hz: 0.25mA  
 @ 250VAC 50Hz: 0.45mA
- Hipot rating (one minute)  
 line-to-ground:2250VDC  
 DCline-to-line:1450VDC

- Power line frequency: 50/60HZ
- Rating voltage: 115/250VAC
- Operating temperature: -25~85°C

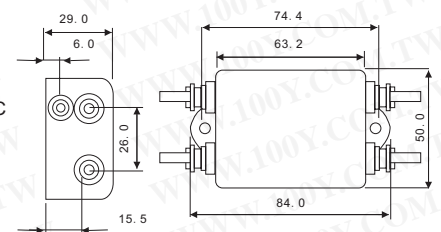

Part No.	Product No.	Description	Rated Vol.	Current (Amp)
41749	CW4L2-06A-T	AC Series EMI Power Line Filter	115/500V	6A
43158	CW4L2-10A-T	AC Series EMI Power Line Filter	115/500V	10A




EMI-01BA1




EMI-20CA5

**Specifications:**

- Rated Voltage:115/250 VAC
- Power Line Frequency:50/60 Hz
- Rated Current: 1, 2, 3, 5, 10, and 20 Amps.
- Maximum Leakage Current:Line-to-Ground  
 @ 115 VAC 60 Hz 0.5 mA  
 @ 250 VAC 50 Hz 1.0 mA
- Test Voltage:Line-to-Ground:2250 VDC, one minute.  
 Line-to-Line:1450 VDC, one minute.

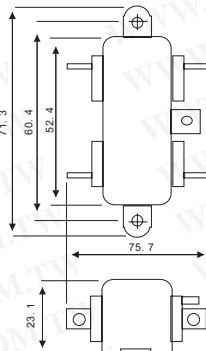

EMI-01BA1

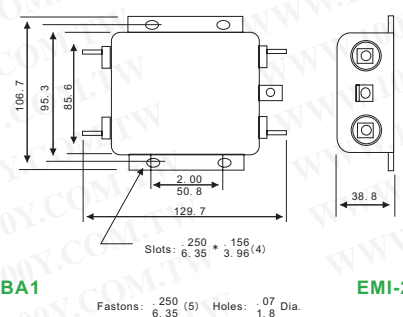

EMI-20CA5

Part No.	Product No.	Description	Rated Vol.	Current (Amp)
6505	EMI-01BA1	AC Series EMI Power Line Filter	115/250Vac	1A
5018	EMI-20CA5	AC Series EMI Power Line Filter	115/250V	20A

